

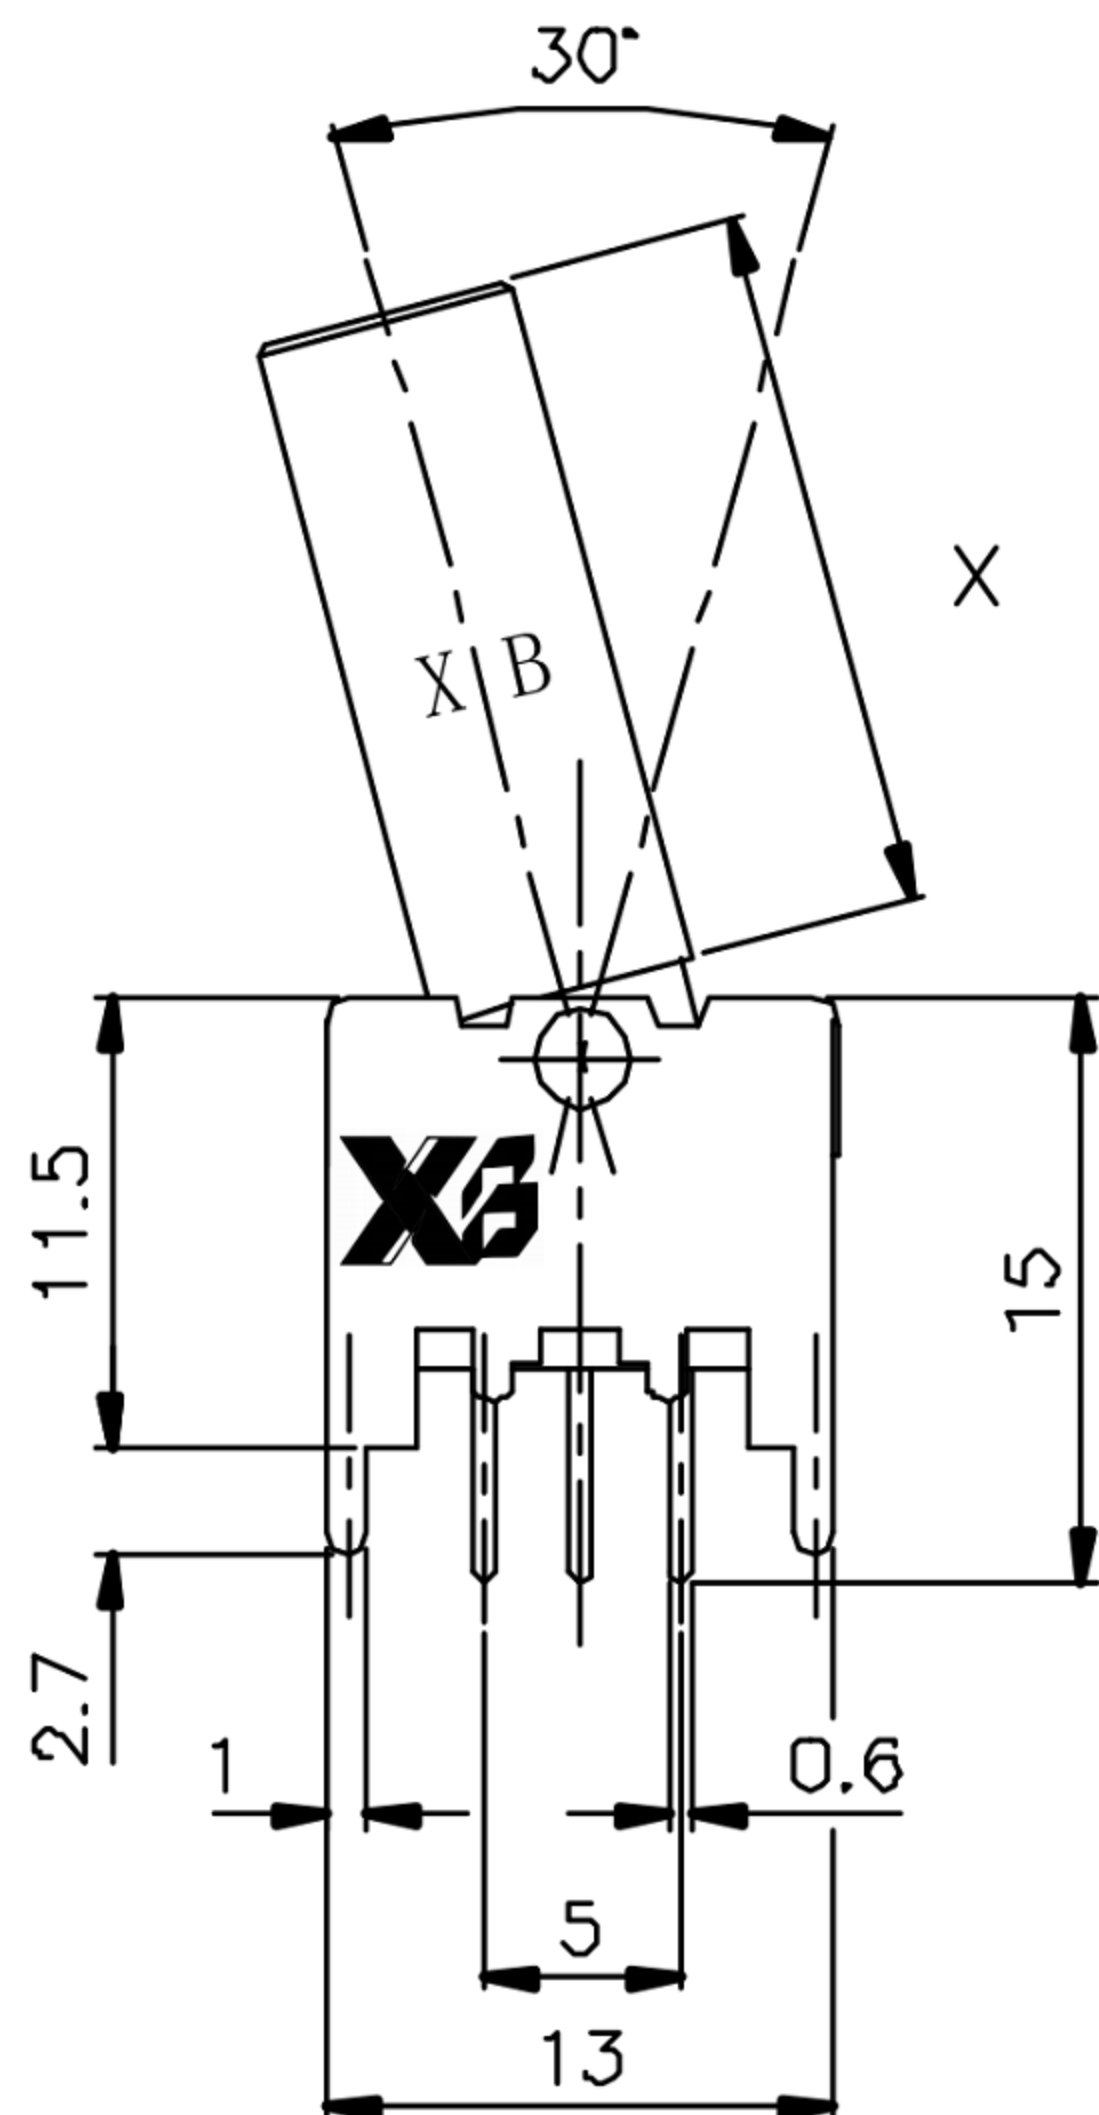



ROHS

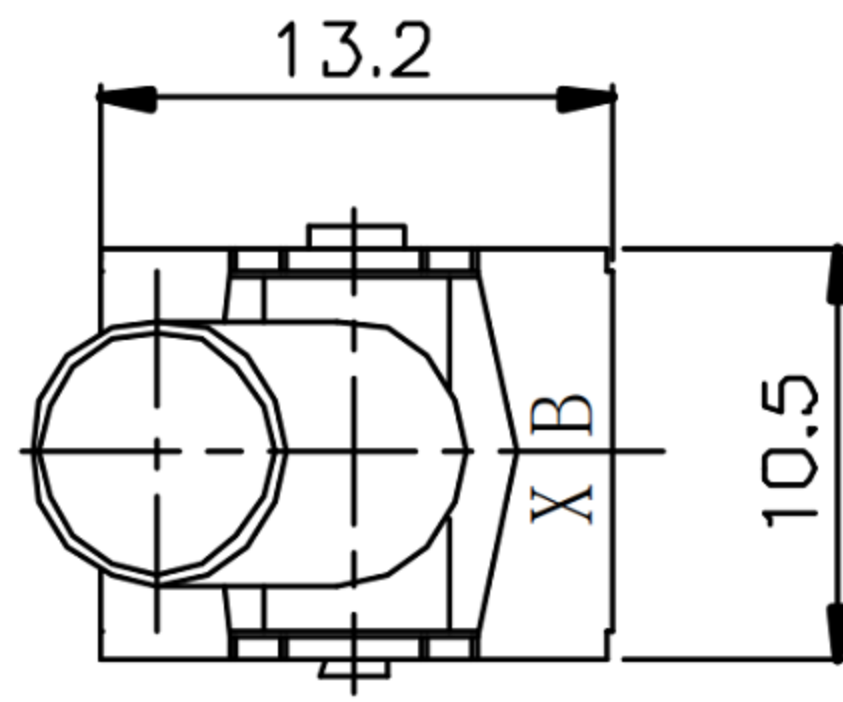

X=

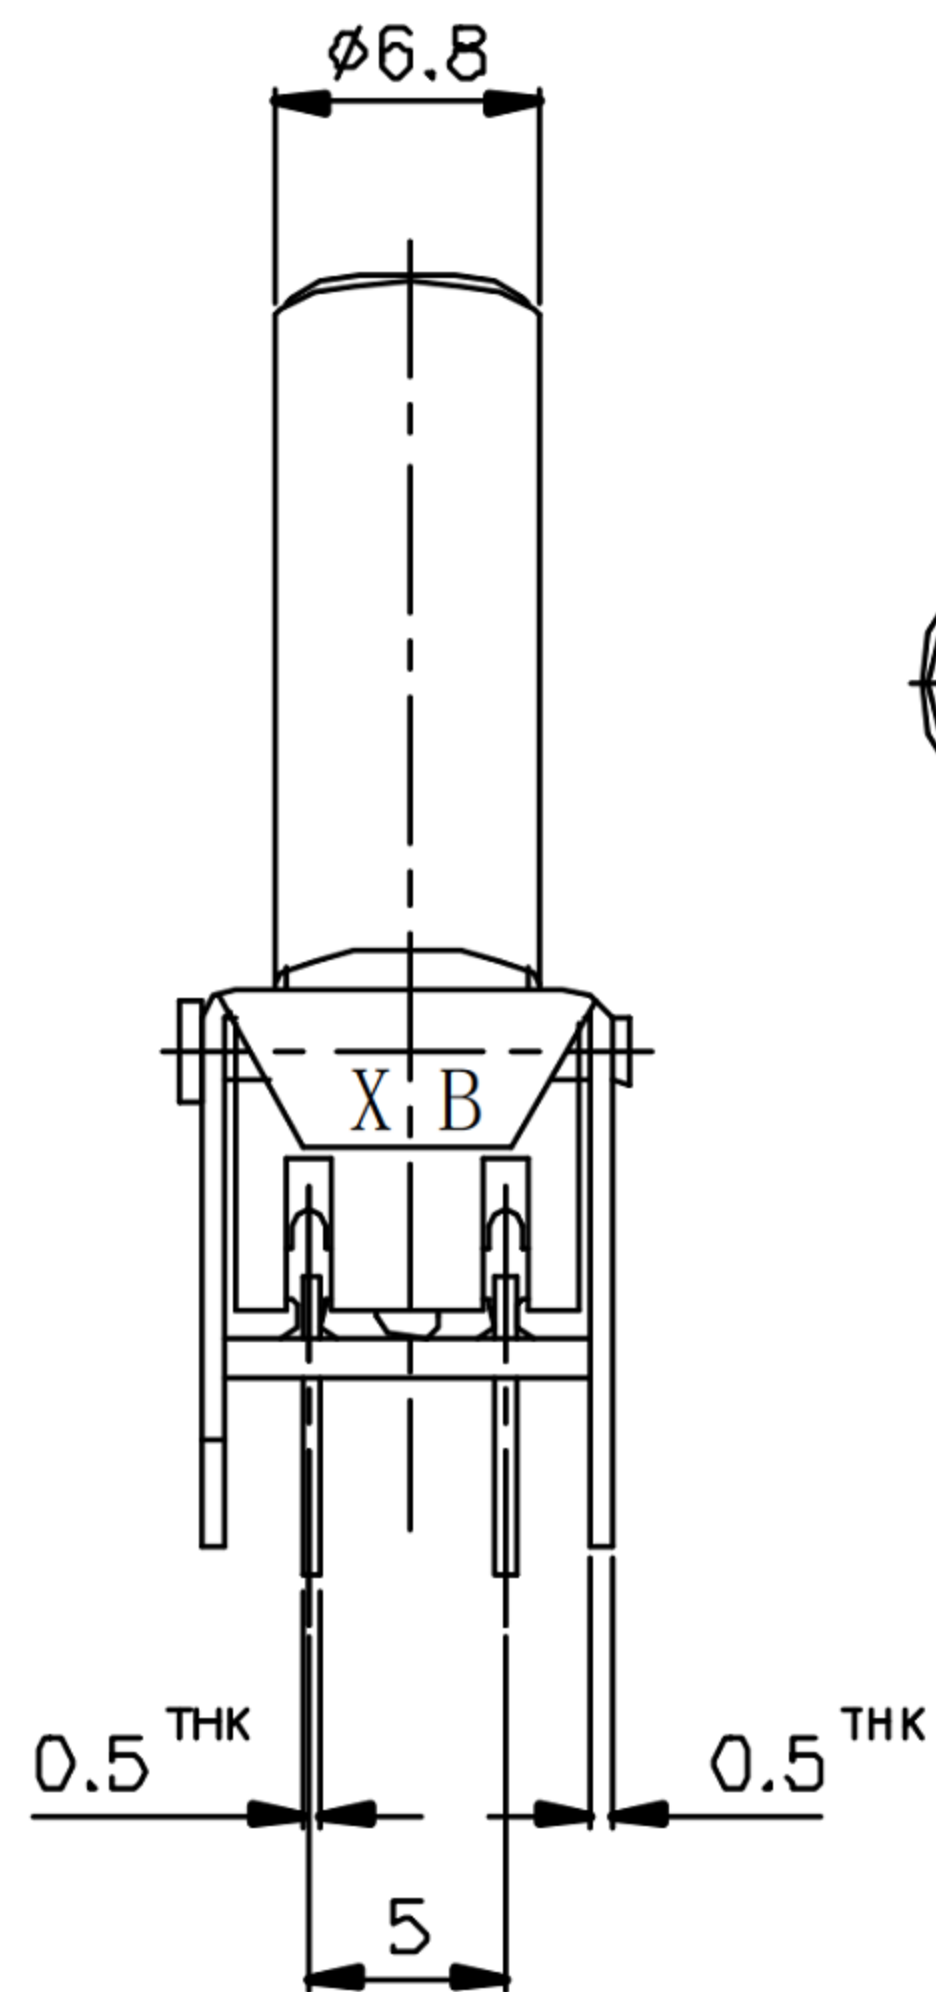

TOGGLE SWITCH 2P2T

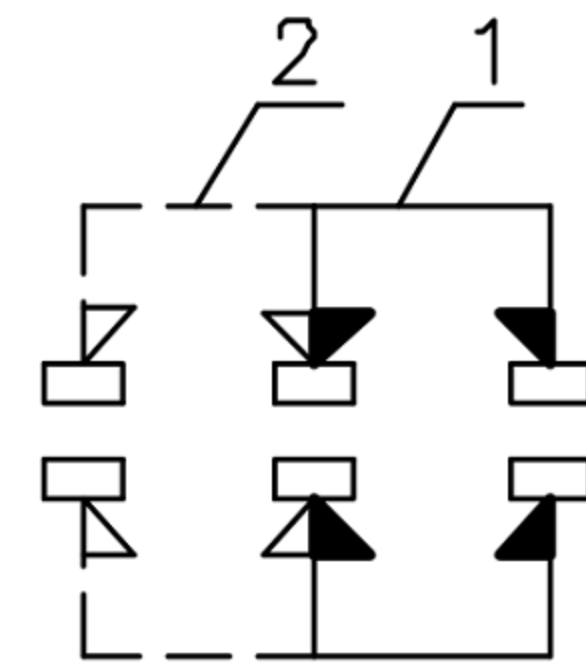


SCHEMATIC

SPECIFICATION (INITIAL)

RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ AT 500V DC
WITHSTAND VOLTAGE:	AC 500V FOR 1 MIN
OPERATION FORCE:	200 ± 50g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

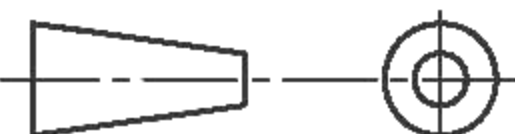		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD											
		TITLE : CARRYING BAR SLIDE SWITCH							7	SPRING	STEEL WIRE	1	NATURE
		MODEL : XB-TS-22E01T							6	STEEL BALL	STEEL	1	NATURE
UNIT : MM		DWN.	ZENQ. CHEN	DATE	TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE	5	BOARD	PHENOLIC RESIN	1	NATURE		
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE			4	CONTACT CLIP	PBS STRIP	2	Ag PLATED		
VERSION 01		APPD.	FEI. LONG. HE	DATE			3	FRAME	IRON STRIP	1	Ni PLATED		
							2	TERMINAL	BRASS STRIP	8	Ag PLATED		
							1	KNOB	POM	1	BLACK		
							NO.	PART NAME	MATERIAL	QTY.	FINISHING		