

Unit: mm


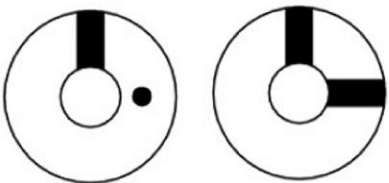


Fig.1

Fig.2

Recommended hole size

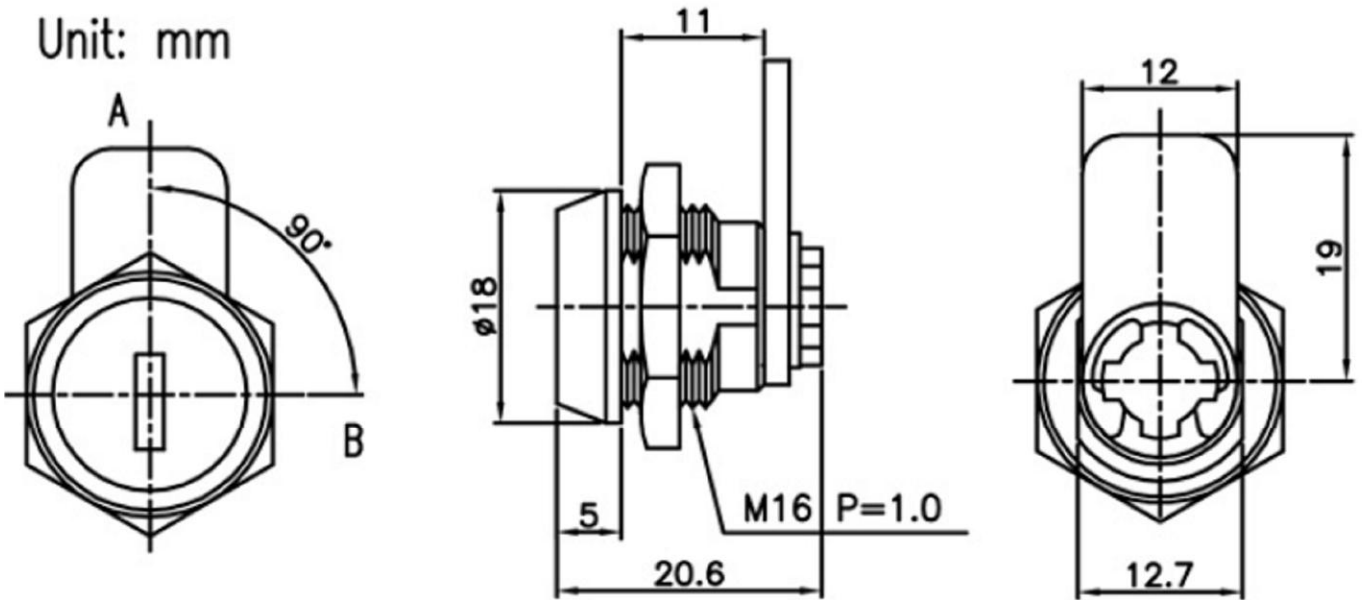

Mechanical key switch

Zinc alloy die cast housing and cylinder  
Dust shutter mechanism  
Chrome plated standard  
5 disc tumbler mechanism  
Reversible double-bitted brass keys, nickel plated  
cam is affixed by E clip  
Hex nut mounted

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

<div><div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div>Switch Connector</div></div></div>					<div>东莞市溪榜电子有限公司</div> <div>DONG GUAN XI BANG ELECTRONICS CO.,LTD</div>												
TITLE : XB KEY SWITCH ELECTRONIC LOCK					<div><div><div></div></div><div><div></div></div></div>												
MODEL : XB-C-327-2																	
UNIT : MM		DWN.	ZENQ. CHEN	DATE			TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°									
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE													
VERSION	01	APPD.	FEI. LONG. HE	DATE													