





ROHS

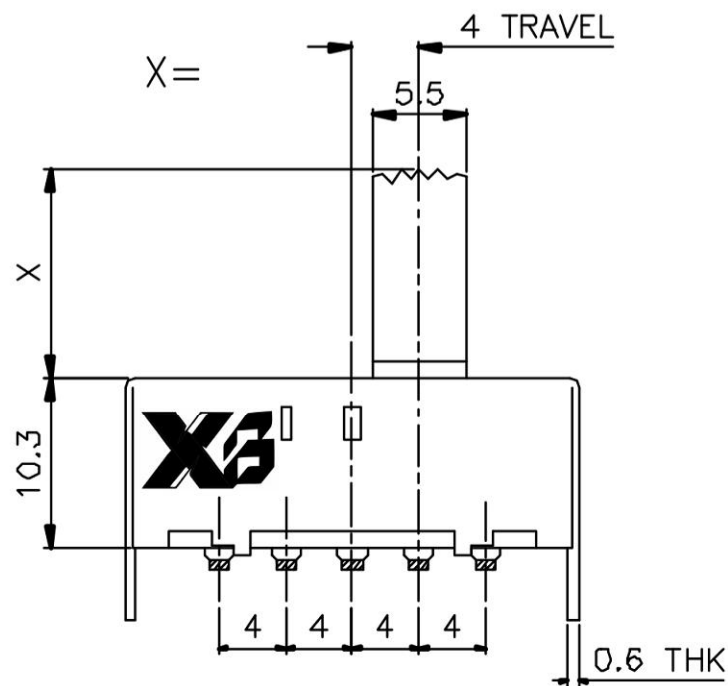

SLIDE SWITCH 1P3T

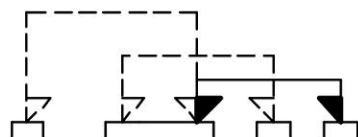

SCHEMATIC

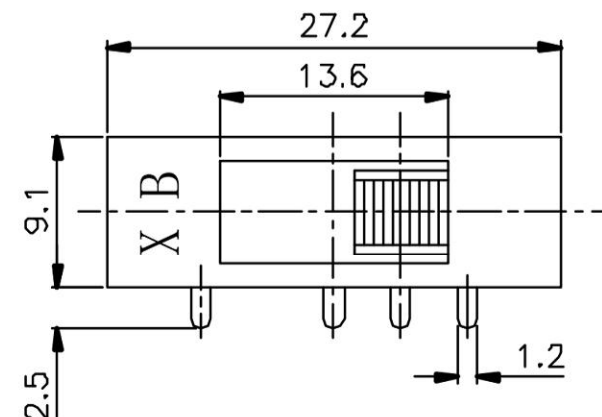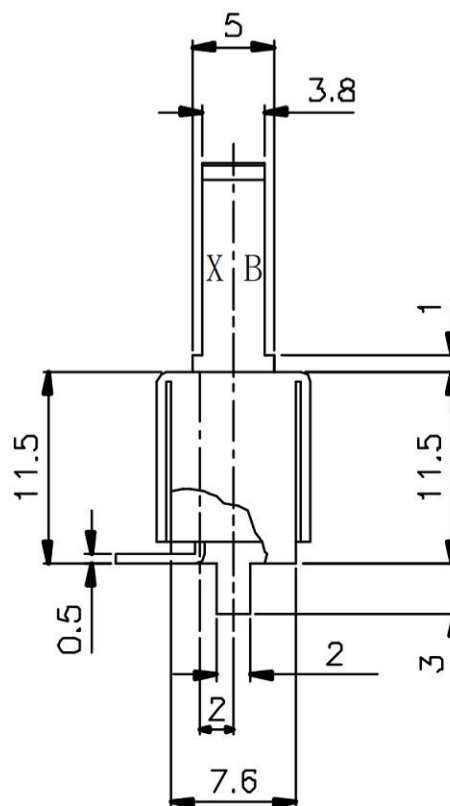

SPECIFICATION (INITIAL)

RATING:	DC	50V	0.5A
CONTACT RESISTANCE:	MAX. 30mΩ		
INSULATION RESISTANCE:	500MΩ AT 500V DC		
WITHSTAND VOLTAGE:	AC 1000V FOR 1 MIN		
OPERATION FORCE:	400 ± 250g		
SWITCHING LIFE:	10k cycles(6-10c/m loading)		


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-SS-13H10X



TOLERANCE
≤1.5mm±0.1
> 1.5mm±0.2
>10mm±0.3

ANGLE
±2°

NO.	PART NAME	MATERIAL	QTY.	FINISHING
7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK

UNIT :	MM	DWN.	ZENQ. CHEN	DATE	
SCALE :	3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE	