

1 2 3 4 5 6 7

A

B

C

D

E

A






B

C

D

E

REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	GAO PENG	

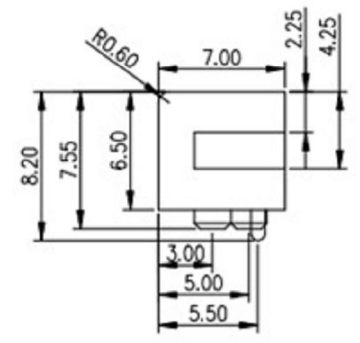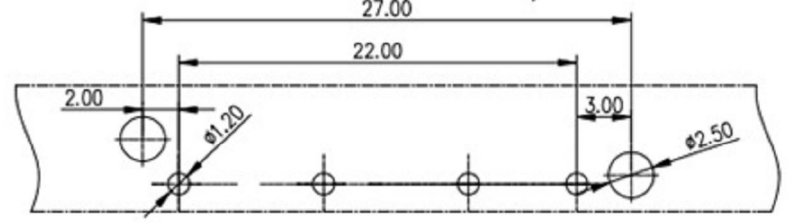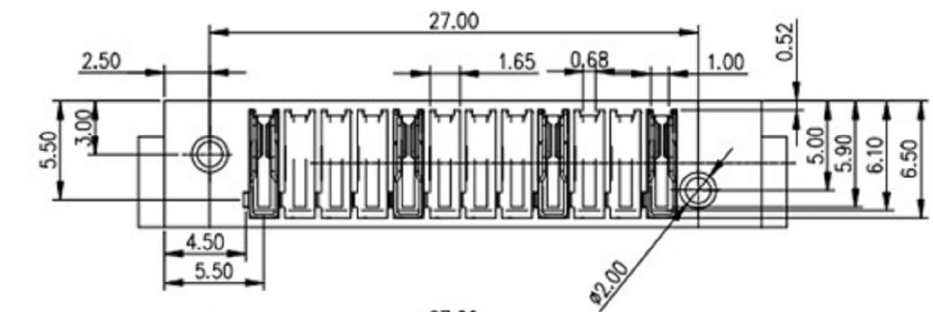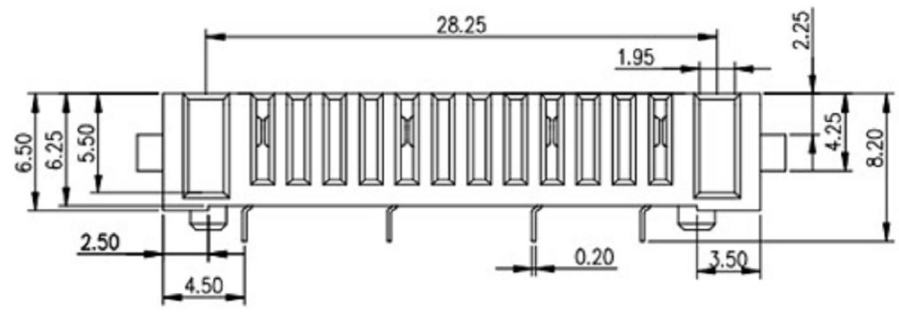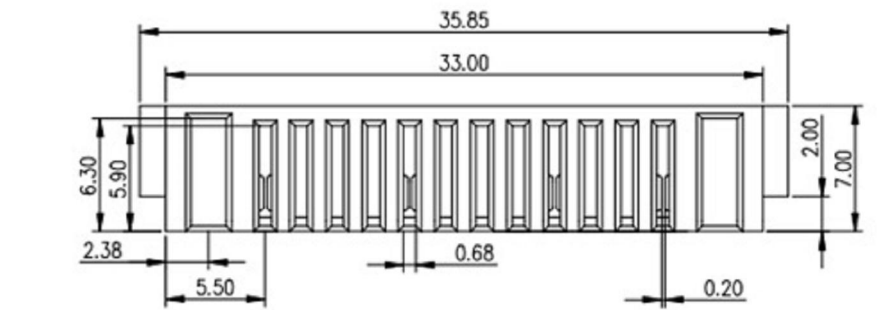

Material
Insulator: Nylon 9T(UL94V-0)
TERMINAL: C2680
TERMINAL: Plated Gold over
Nickel or Tin
Specification
Current rating: 8A
instant CURRENT: 12A
Contact Resistance: 30mΩ
Insulation Resistance: 100MΩ
Dielectric Voltage: 500V
Operating
Temperature: -40°~105°

Recommended P.C.B Layout
Layout Tolerance=+/-0.05mm

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.50 X.x ±0.30 X.xx ±0.20 ANGULAR ±2°	DESIGN	GAO PENG	DATE		TITLE: Battery holder connector	
	APPROVED	PANG. DONG	DATE			
	PART	XB-A01F-H1-A-L-4P		REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING			SIZE: A4	SHEET: 1/1	

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

1 2 3 4 5 6 7