
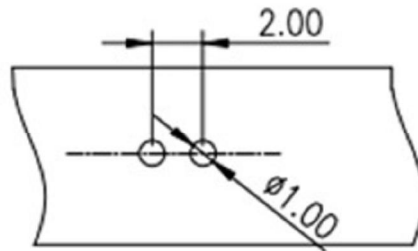
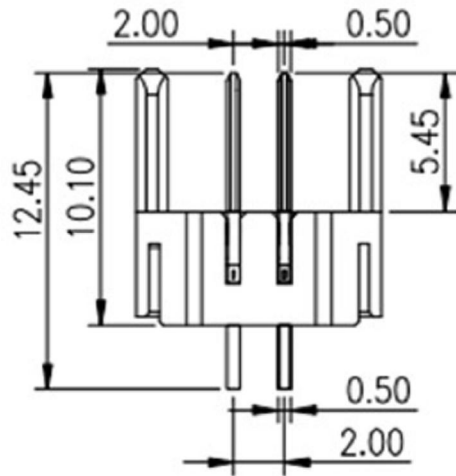
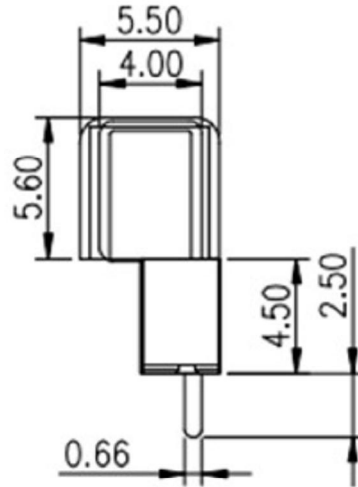


REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	GAO PENG	

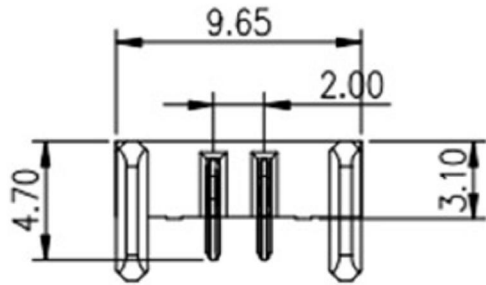

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

Material
 Insulator:Nylon 9T(UL94V-0)
 TERMINAL: C2680
 TERMINAL:Plated Gold over
 Nickel or Tin
 Specification
 Current rating:8A
 instant CURRENT:12A
 Contact Resistance:30mΩ
 Insulation Resistance:100MΩ
 Dielectric Voltage:500V
 Operdting
 Temperature:-40°~105°

XB 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

UNLESS OTHERWISE
 SPECIFIED,TOLERANCE:
 X. ±0.50
 X.x ±0.30
 X.xx ±0.20
 ANGULAR ±2°

DESIGN	GAO PENG	DATE		TITLE:
APPROVED	PANG. DONG	DATE		Battery holder connector
PART	XB-A01M-A-M5-2P	REV: 01	SCALE:1:1	UNIT: mm
DRAWING		SIZE: A4	SHEET:1/1	