

1

2

3






4

5

6

7

REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	GAO PENG	

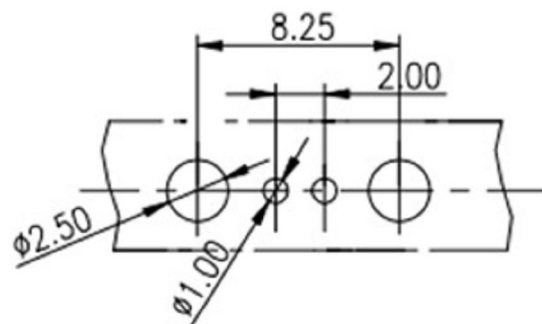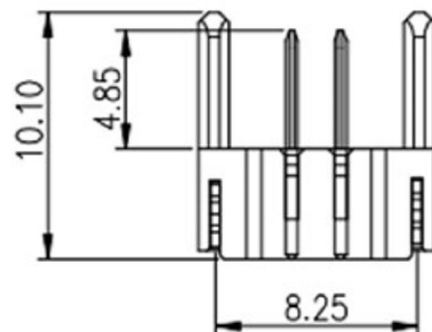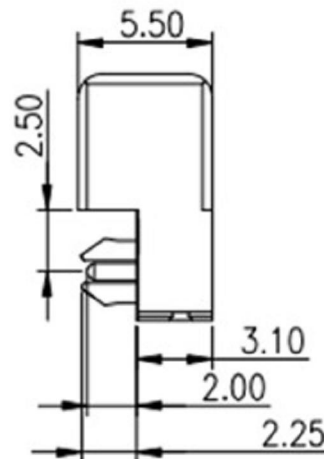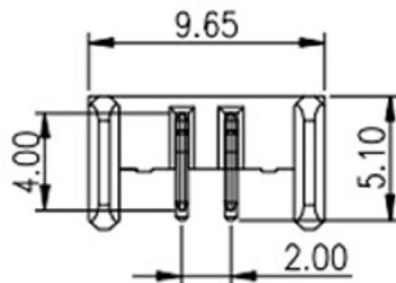

Material
Insulator:Nylon 9T(UL94V-0)
TERMINAL: C2680
TERMINAL:Plated Gold over
Nickel or Tin
Specification
Current rating:8A
instant CURRENT:12A
Contact Resistance:30mΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting
Temperature:-40°~105°

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:
X. ±0.50
X.x ±0.30
X.xx ±0.20
ANGULAR ±2°

DESIGN	GAO PENG	DATE		TITLE:
APPROVED	PANG. DONG	DATE		Battery holder connector
PART	XB-A01M-M2-A-X-2P	REV: 01	SCALE:1:1	UNIT: mm
DRAWING		SIZE: A4	SHEET:1/1	

1

2

3

4

5

6

7