
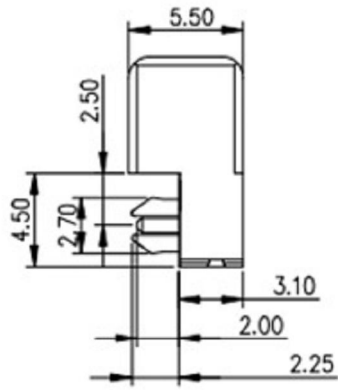


1 2 3 4 5 6 7

REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	GAO PENG	

A

A

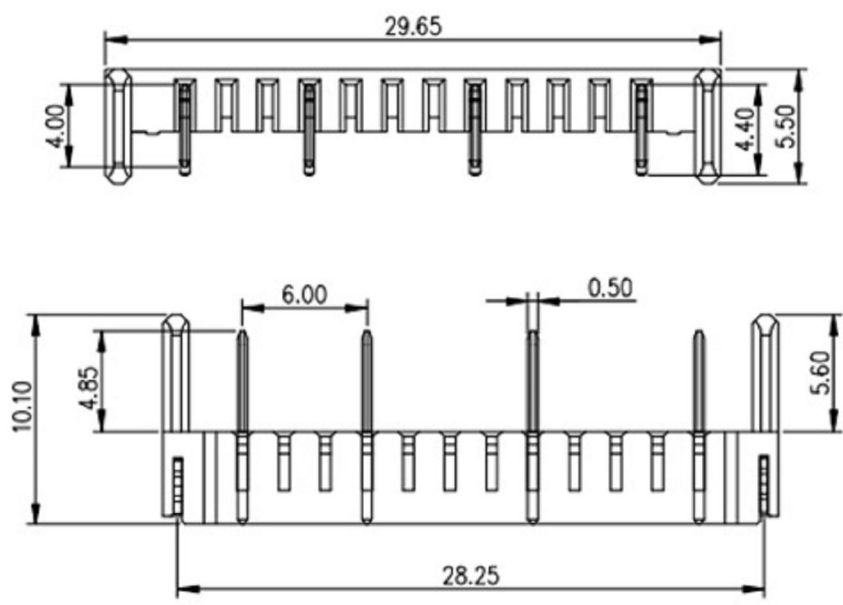

B

B


C

C



D

D

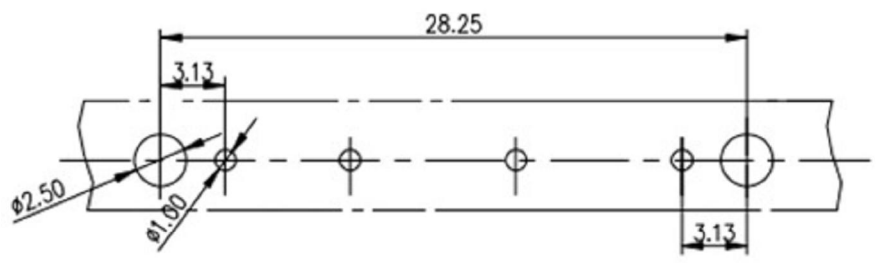

Material
Insulator:Nylon 9T(UL94V-0)
TERMINAL: C2680
TERMINAL:Plated Gold over
Nickel or Tin
Specification
Current rating:8A
instant CURRENT:12A
Contact Resistance:30mΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting
Temperature:-40°~105°

E

E

Recommended P.C.B Layout
Layout Tolerance=+/-0.05mm

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.50 X.x ±0.30 X.xx ±0.20 ANGULAR ±2°	DESIGN	GAO PENG	DATE		TITLE: Battery holder connector	
	APPROVED	PANG. DONG	DATE			
	PART	XB-A01M-M2-A-X-L-4P		REV: 01	SCALE:1:1	UNIT: mm
	DRAWING			SIZE: A4	SHEET:1/1	

1 2 3 4 5 6 7