
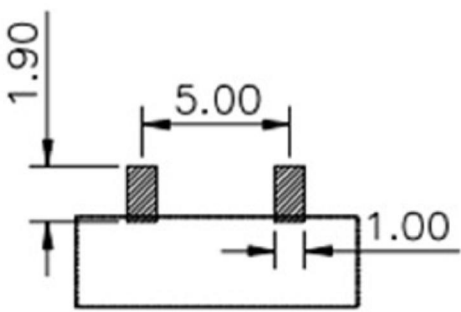
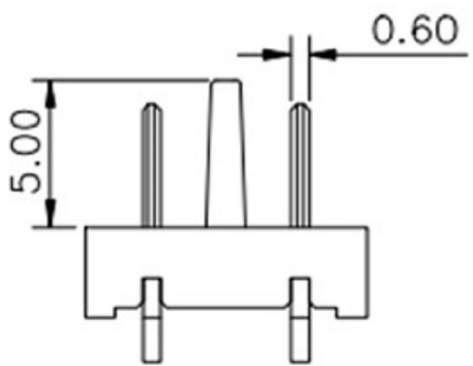
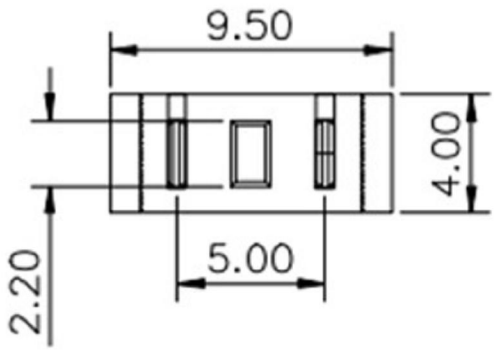


1 2 3 4 5 6 7

REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	GAO PENG	

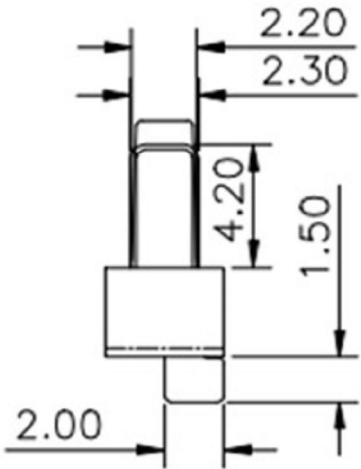

Recommended P.C.B Layout
Layout Tolerance=+/-0.05mm

Material
Insulator: Nylon 9T(UL94V-0)
TERMINAL: C2680
TERMINAL: Plated Gold over
Nickel or Tin
Specification
Current rating: 8A
instant CURRENT: 12A
Contact Resistance: 30mΩ
Insulation Resistance: 100MΩ
Dielectric Voltage: 500V
Operating
Temperature: -40°~105°

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ±0.50
X.x ±0.30
X.xx ±0.20
ANGULAR ±2°

DESIGN	GAO PENG	DATE		TITLE:
APPROVED	PANG. DONG	DATE		Battery holder connector
PART	XB-B02M-R1-2P-M	REV: 01	SCALE: 1:1	UNIT: mm
DRAWING		SIZE: A4	SHEET: 1/1	

1 2 3 4 5 6 7