

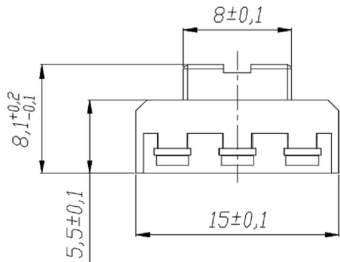






ROHS

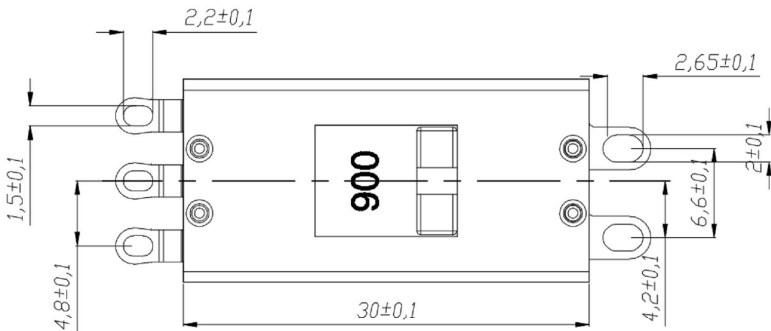

线路图
CIRCUIT DIAGRAM

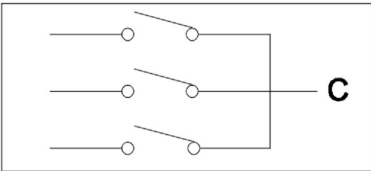

线路图
CIRCUIT DIAGRAM

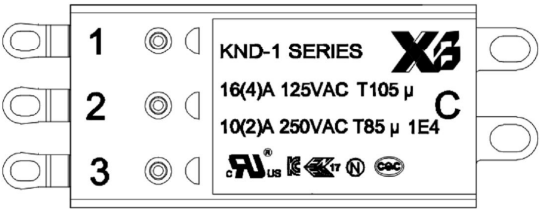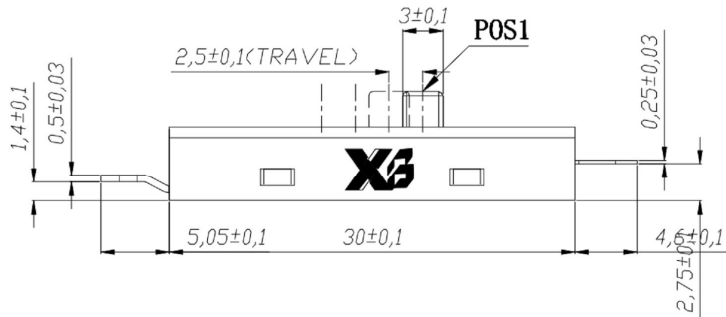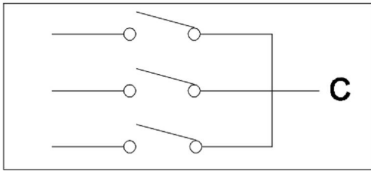


电流电路
CURRENT CIRCUIT

CIRCUIT:006D


位置POSITION	电路CIRCUIT
1(INITIAL)起始	OFF
2	C1+1
3	C1+1;C2+2
4	C1+1;C2+2+3




1档
(起始档)



2档



3档



4档

- 滑动开关型号 SLIDE SWITCH MODEL: KND-1-CS006D-R2
- 焊线端子 SOLDER CONNECTOR TYPE;
单刀四掷,多回路 SINGLE POLE FOUR THROW, MULTI-CIRCUIT
- 额定值 RATING: 16(4)A 125/250VAC μ T105 (UL,KC,CQC,ENEC17;NEMKO)
10(2)A 125/250VAC μ T105 (UL,KC)
10(2)A 250VAC μ T85 (CQC,ENEC17;NEMKO)
7(2)A 250VAC μ T85 (CQC,ENEC17;NEMKO)
- 接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
- 绝缘电阻 INSULATION RESISTANCE: $\geq$ 100M Ω (DC500V/1MIN)
- 介电强度 DIELECTRIC STRENGTH: 1500V/5mA/1MIN
- 机械寿命 MECHANICAL LIFE: >50000 CYCLES
- 电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S
- 操作力 OPERATION FORCE:550 $\pm$ 150gf
- 所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-KND-1-CS006D-R2



TOLERANCE
<=1.5mm $\pm$ 0.1
>1.5mm $\pm$ 0.2
>=10mm $\pm$ 0.3

ANGLE
 $\pm$ 2°

UNIT : MM	DWN.	DATE	2011-11-19
SCALE : 4 : 1	CHK'D	DATE	
VBRSION	01	APPD.	DATE

8	SEAL PLATE	SUS	2	NATURE
7	STEEL BALL	STEEL	1	NATURE
6	SPRING	SUS	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	1	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	4	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING