

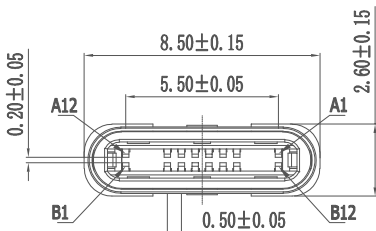
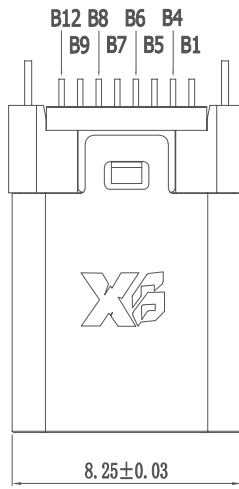
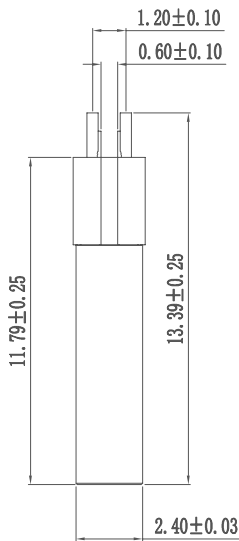
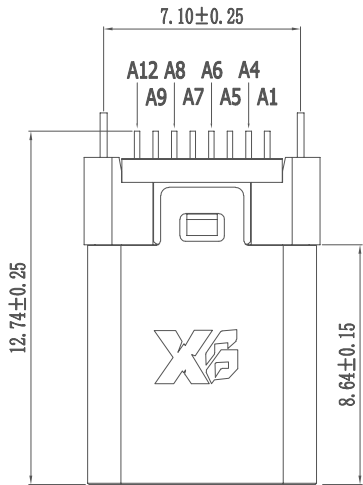


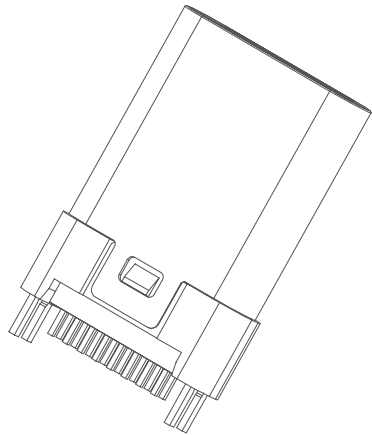



RoHS
Compliant



USB TYPE C 接线示意图		
A4、A9、B9、B4		V
A5		
B5		
A1、A12、B1、B12		G
A6		D+
A7		D-
(R1=56KΩ R3=56KΩ) 5%		

夹板

插板

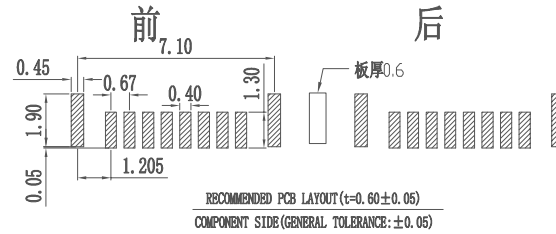

NOTES:

1. MECHANICAL:

MATING FORCE: 5-20N .

UNMATING FORCE: 8-20N .

DURABILITY: 10000 CYCLES MIN.

2. ELECTRICAL:

CURRENT: 5.0A MAX

VOLTAGE: 20V MAX

WITHSTANDING VOLTAGE: 100V AC

CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES

3. ENVIRONMENTAL

OPERATING TEMPERATURE RANGE -30°C ~ +80°C

表1

品名	规格
1030036	LCP黑
1030037	LCP白

④	GND LATCH	1	STAINLESS STEEL	NICKEL PLATED OVERALL, TAB WITH LEAD FREE TIN ALLOY.
③	CONTACT	16	COPPER ALLOY	NICKEL UNDERPLATING OVER ALL, GOLD PLATING AT - CONTACT AREA. LEAD FREE TIN ALLOY AT TERMINATION.
②	SHELL	1	STAINLESS STEEL	CLEAN.
①	HOUSING	2	THERMOPLASTIC UL 94V-0	MOLDED COLOR: BLACK, white
NO.	DESCRIPTION	QTY.	MATERIAL	TREATMENT

X.	±0.50	X.*	±2°	UNITS mm
.X	±0.30	.X.*	±1°	
.XX	±0.10	.XX.*	±0.5°	MAT'L
.XXX	±0.05			

THE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN XIBANG ELECTRONICS CO., LTD. AND SHALL NOT BE REPRODUCED OR USED WITHOUT THE WRITTEN CONSENT OF DONGGUAN XIBANG ELECTRONICS CO., LTD.	FINISH	APPD:	DWG NO.: 参考表1
	Q'TY	CHKD:	

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		TYPE-C 16PIN直插/夹板公头 高H=12.74MM	
DR:		SCALE SHEET REV. 1/1 1/1 A	