

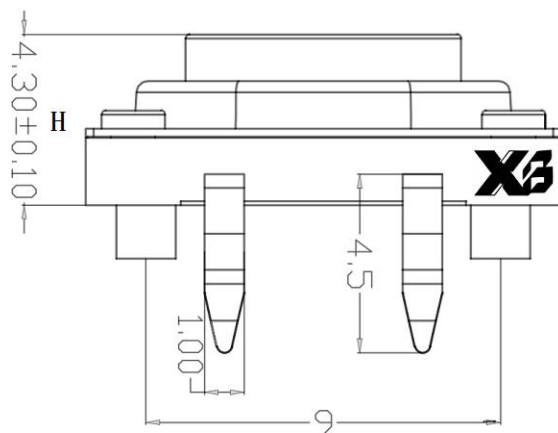
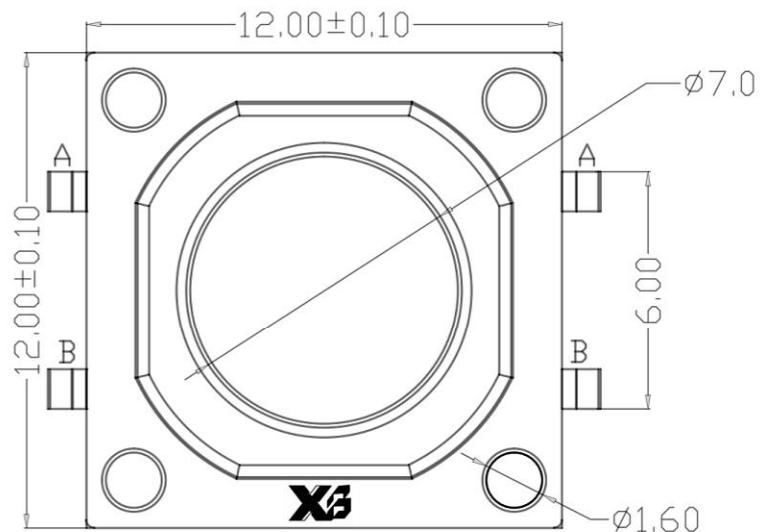
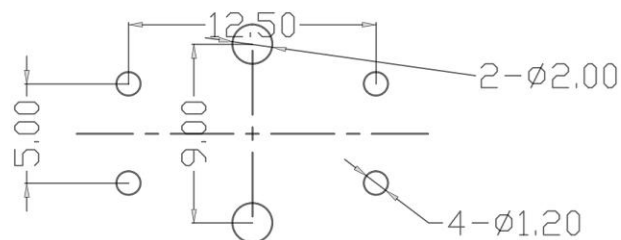



ROHS

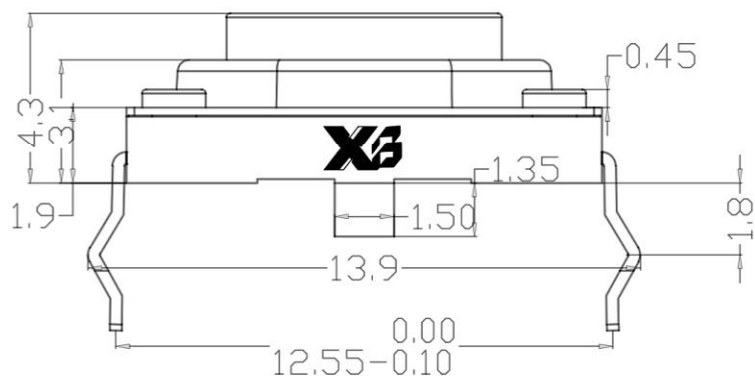

(H)
4.3
7.3

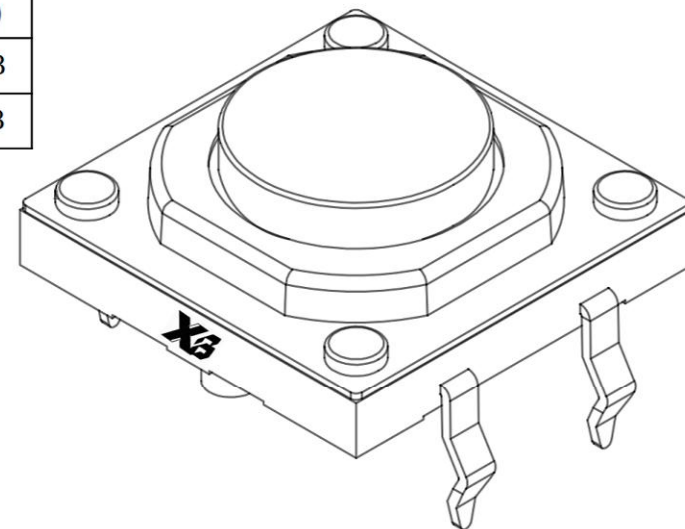

P.C.B LAYOUT



Circuit Diagram

NO.1	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.2-NO.3	
PART NO	NOTE
01~99	SERIAL NUMBER

Climate grade:-30°C~70°C
Rated values:50mA/12V
Contact resistance: $\leq 50\text{m}\Omega$
Dielectric strength:250V.AC.1Min
Insulation resistance: $\geq 100\text{M}\Omega$
Operating force:250 $\pm$ 30gf
Travel:0.30
Life:5,000,000cyces-10,000,000cyces

⑥	Cover	—	1	SUS	Plating Ni	—
⑤	Keystoke	—	1	PBT	Red	—
④	Dust Cover	—	1	PET	—	—
③	Contact	—	1	SUS	Plating Ag	—
②	Base	—	1	PBT	Black	—
①	Terminal	—	4	Brass(0.3t)	Plating Ag	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB TACT SWITCH

MODEL : XB-TS-T1212YD



TOLERANCE	
$\leq 1.5\text{mm}$	± 0.1
$> 1.5\text{mm}$	± 0.2
$> 10.0\text{mm}$	± 0.3

ANGLE TOL
 $\pm 2^\circ$

8	REEL	PS	1	BLUE
7	CARRIER	PS	1	CLEAR
6	COVER TAPE	PS	1	CLEAR
5	CONTACT	PBS STRIP	1	Ag CLAD
4	COVER	IRON STRIP	1	Ni PLATED
3	CASE	NYLON	1	BLACK
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	NYLON	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING