




ROHS

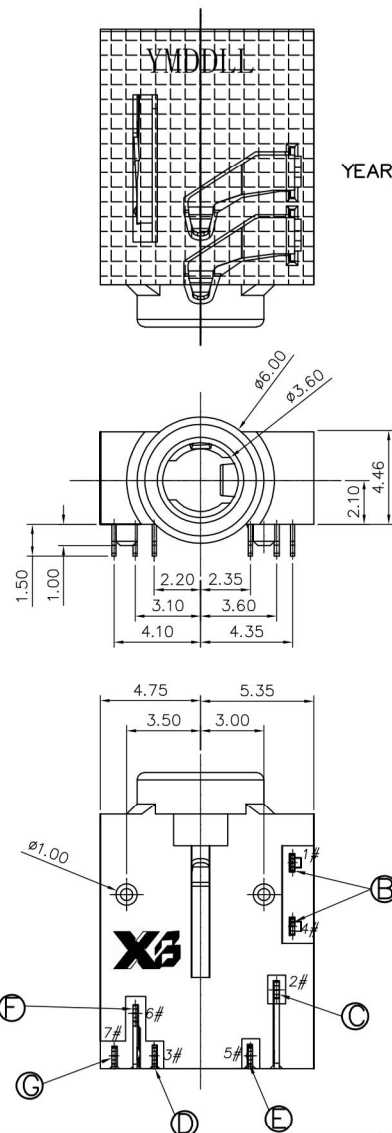

DATE CODE:
Y M DD LL Line
YEAR(8=2018 9=2019) Date(01= 01) Month(1 =1,2=2, A=10,B =11,C=12

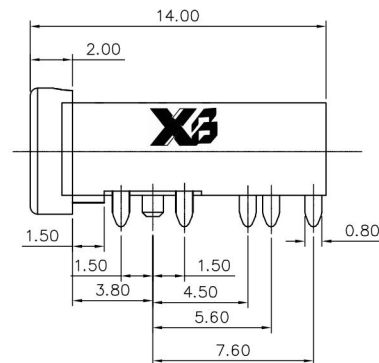


MODEL NO.	PJ33150-I
SCHEMATIC	

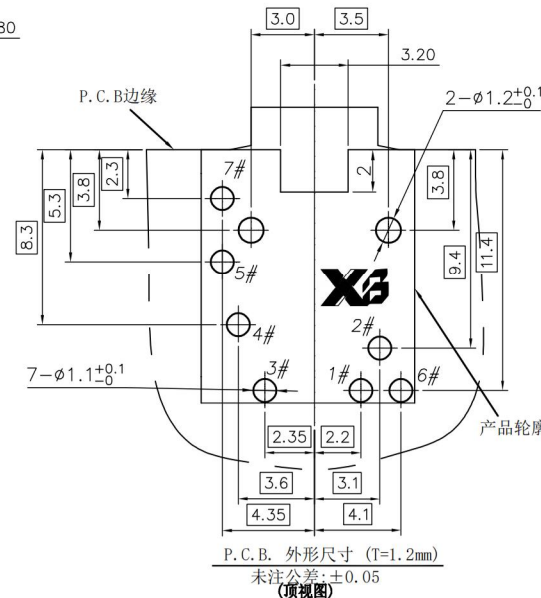

修订 REV.	数量 Q'TY	ECN 编号 ECN. NO.	变更原因及内容 REASON&CONTENTS	签名 SIGN	日期 DATE
			新版发行		2013.03.06
			Add new p/n		2014.9.18
			Add new p/n		2020.06.10

Ordering information:
XB-PJ33150-I 9T 0A 00 1
(1) (2) (3) (4) (5) (6) (7)
(1):Series No.
(2):Schematic option:I
(3):Material of housing:
9T=PA9T
(4):Housing color:
0A=Black
(5):Terminal plating:
G=For contact 1# & 4# & 5# & 7#, Gold Flash on mating area, 100u'' Tin on solder tail, 50u'' Nickel underplated.
For contact 2# & 3# & 6#, 20u'' Silver overall, 50u'' Nickel underplated.
T=Tin plating
(6):Special option:
00=No special option
01=Laser D/C
(7):Packing mode:
I=Tape reel packing

Specification:
1.Rating : DC 30V 0.5A.
2.Contact resistance: $\leq 50m\Omega$.
After life test: $\leq 100m\Omega$.
3.Insulation resistance: $\geq 100M\Omega$ (500VDC).
After life test: $\geq 50M\Omega$.
4.Withstand voltage: 500VAC.
5.Insertion and extraction force: 3N~30N.
6.life test: 5000cycles min.
7.Operation temperature range:-20℃~70℃.
8.Preservative temperature range:-40℃~85℃.

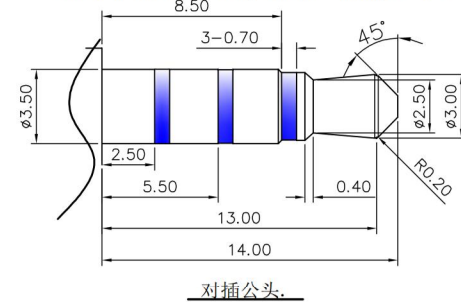

ITEM	DESCRIPTION	QTY	MATERIAL	REMARK
H	Mylar	1	Mylar	
G	Break Terminal	1	Brass	See p/n info
F	Shunt terminal	1	Phosphor Bronze	See p/n info
E	Ring spring	1	Phosphor Bronze	See p/n info
D	Tip spring	1	Phosphor Bronze	See p/n info
C	Earth spring	2	Phosphor Bronze	See p/n info
B	Transfer terminal	1	Phosphor Bronze	See p/n info
A	Housing	1	High-temp thermoplastic	Black

UNIT(单位):MM	TOLERANCE(公差)	TYPE(产品类型):	MODEL NO(料号):	Customer drawing
	DIMENSIONS(尺寸)		XB-PJ33150-I9T0A_	
	ANGLES(角度)	001 03.5 Phone Jack	DRAWING No(图号):	SCALE: REV.: PAGE:
			XB-AY-0000-0118	比例: 版本: 页数:
DESIGNER BY:				
CHECK BY:				
APPROVED BY:				
核 定:				

X3 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD