
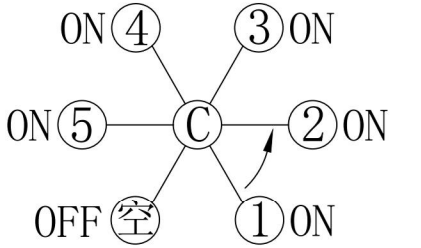
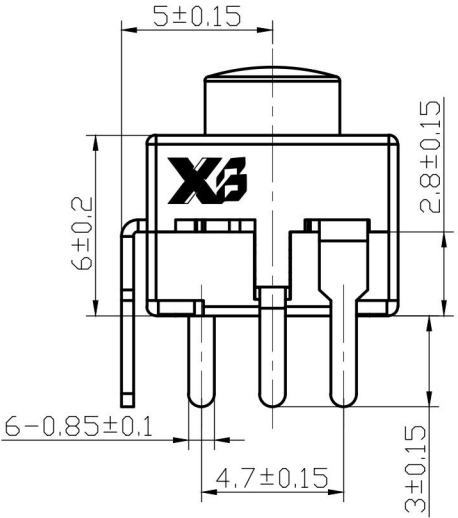


尺寸
8.3
8.7
9
9.5
10
10.5
11.5
12.5
13.5


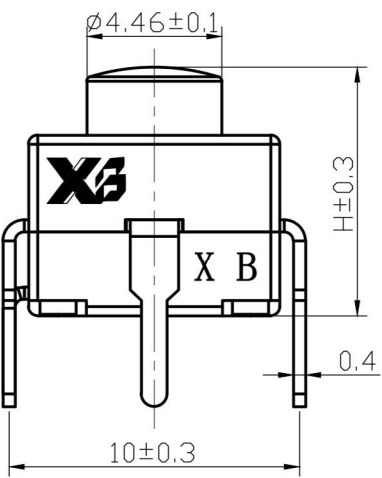


ON-ON-ON-ON-ON-OFF
电气原理图

- 技术要求:
- 1. 电气性能
额定负荷:1A 250V AC 1E4;
接触电阻:≤100mΩ;
绝缘电阻:≥100MΩ;
介电强度:≥500VAC/1min;
 - 2. 环境温度:-25℃~75℃;
 - 3. 相对湿度:≤95%(40℃);
 - 4. 操作力:800±200g;
 - 5. 未注公差均按GB / T1804-m级。

MATERIAL:

Actuator: SUS ;
Top Base: SUS;
Buttom Base:PA66+GF ;
Terminal: Brass,Silver plated ;
Nut: Brass, Ni plated .

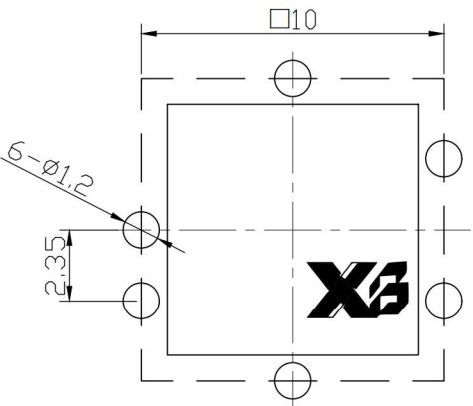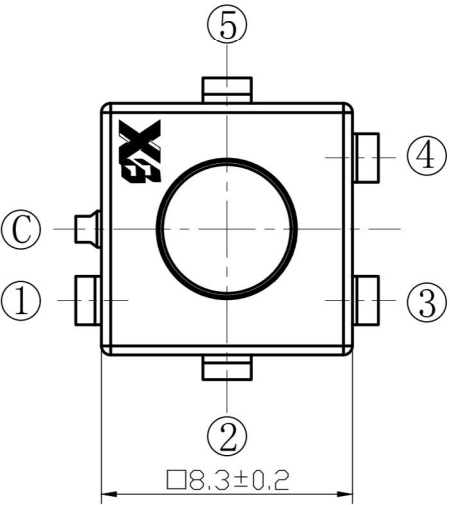

PCB板位置图

The material contained in this drawing is the property of XiBang. Any use other than that specfically authorized by XiBang i5 prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD				 									
		TITLE : PUHS BUTTON SWITCH						MODEL : XB-YT-8306-516 六档. 5开1关 6脚				TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3		ANGLE ±2°	
UNIT : MM		DWN.	ZENQ. CHEN		DATE										
SCALE : 3 : 1		CHK'D	PENG. GAO		DATE										
VERSION		01	APPD.	FEI. LONG. HE		DATE									