
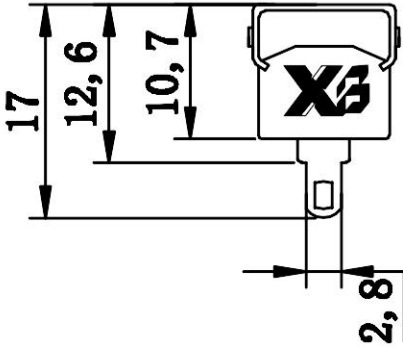
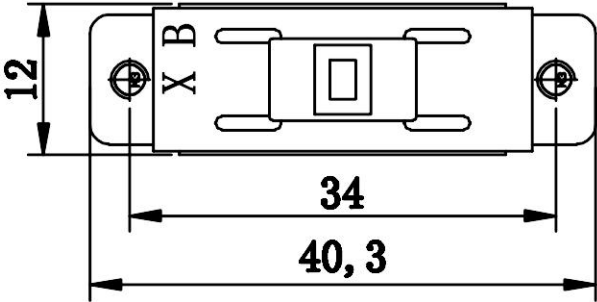
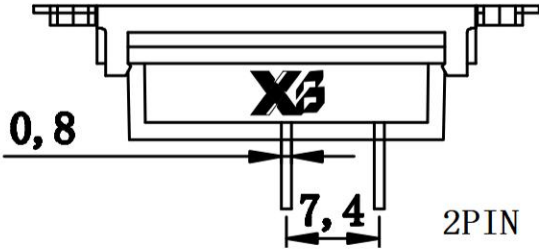


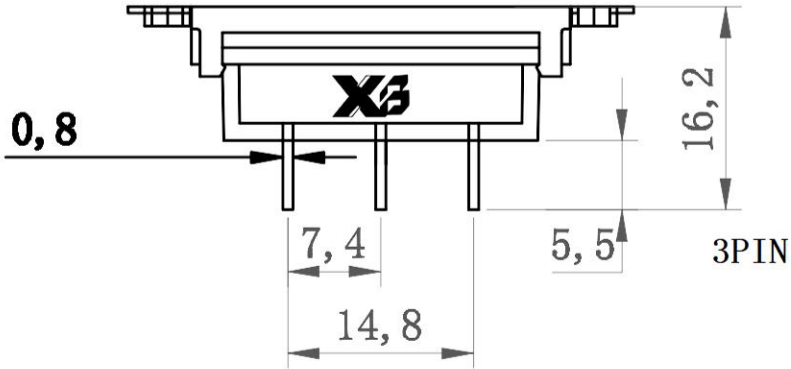

X B 12A125/250VAC
L16
10(1)A250V~T85

SPECIFICATION (INITIAL)					
RATING: 10A 12A 125V 250V AC					
CONTACT RESISTANCE: Not more than 30mΩ					
INSULATION RESISTANCE:500MΩ at1500V DC					
WITHSTAND VOLTAGE:AC 500V for 1 min					
OPERATION FORCE: 300±100g					
SWITCHING LIFE:10000 Cycles(6-10c/m loading)					

序号	名称	数量	材料	型号	阻燃
1	基座	1	PA66	EPR27L	V0级
2	推子	1	PA66	EPR27L	V0级
3	盖板	1	铁皮		
4	焊脚	3	黄铜电镀		
5	弹黄	2	碳索钢丝		

The material contained in this drawing is the property of XiBang. Any use other than that specfically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司							
		DONG GUAN XI BANG ELECTRONICS CO.,LTD							
		TITLE : XB SLIDE SWITCH							
MODEL : XB-CH-Z03-E-2P									
UNIT : MM		DWN.	ZENQ. CHEN	DATE	TOLERENCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°			
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE					
VERSION	01	APPD.	FEI. LONG. HE	DATE					