

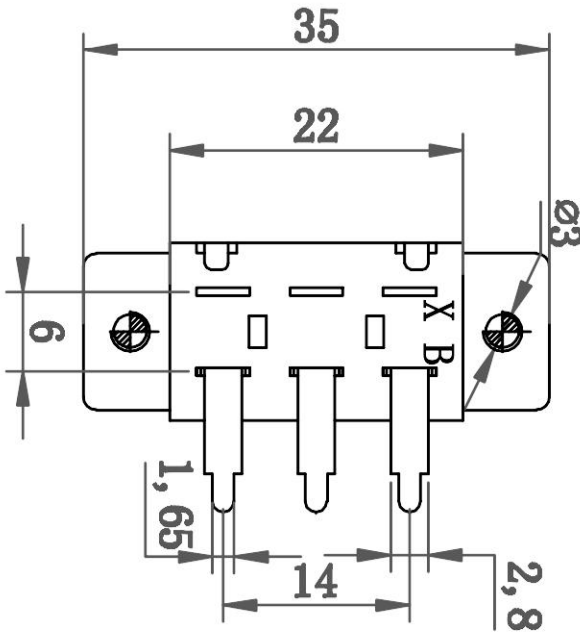
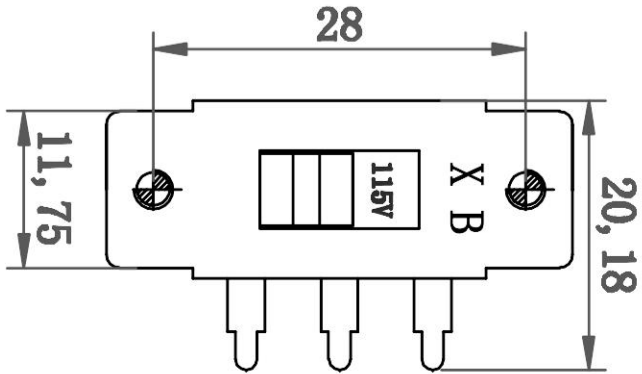

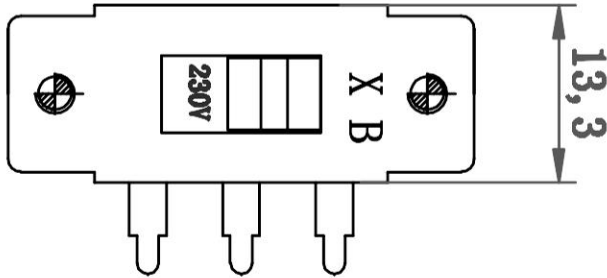


ROHS

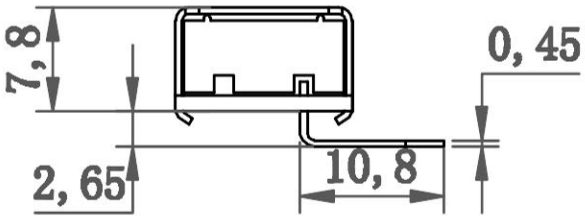

SCHEMATIC



| 序号 | 名称 | 数量 | 材料 |
|----|----|----|------|
| 1 | 外壳 | 1 | 宝钢铁皮 |
| 2 | 推子 | 1 | PA66 |
| 3 | 底板 | 1 | 胶木板 |
| 4 | 焊脚 | 6 | 黄铜电镀 |
| 5 | 弹簧 | 2 | 碳索钢丝 |
| 6 | 跳板 | 2 | 黄铜电镀 |

1P2T


| SPECIFICATION (INITIAL) | |
|-------------------------|-------------------------------|
| RATING: | 3A 6A 125V 250V AC |
| CONTACT RESISTANCE: | Not more than 30mΩ |
| INSULATION RESISTANCE: | 500MΩ at 1500V DC |
| WITHSTAND VOLTAGE: | AC 500V for 1 min |
| OPERATION FORCE: | 300±100g |
| SWITCHING LIFE: | 10000 Cycles(6-10c/m loading) |

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB SLIDE SWITCH
MODEL : XB-CH-Z09 1P2T



TOLERANCE
<=1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

| | | | |
|---------------|-------|------------|---------------|
| UNIT : MM | DWN. | ZENQ. CHEN | DATE |
| SCALE : 3 : 1 | CHK'D | PENG. GAO | DATE |
| VBRSION | 01 | APPD. | FEI. LONG. HE |

| NO. | PART NAME | MATERIAL | QTY. | FINISHING |
|-----|--------------|----------------|------|-----------|
| 7 | SPRING | STEEL WIRE | 1 | NATURE |
| 6 | STEEL BALL | STEEL | 1 | NATURE |
| 5 | BOARD | PHENOLIC RESIN | 1 | NATURE |
| 4 | CONTACT CLIP | PBS STRIP | 2 | Ag PLATED |
| 3 | FRAME | IRON STRIP | 1 | Ni PLATED |
| 2 | TERMINAL | BRASS STRIP | 8 | Ag PLATED |
| 1 | KNOB | POM | 1 | BLACK |