

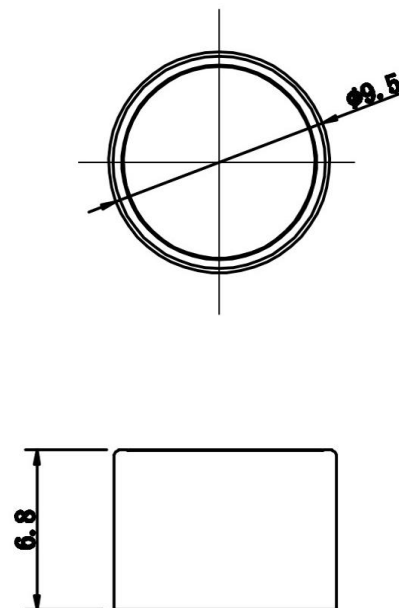
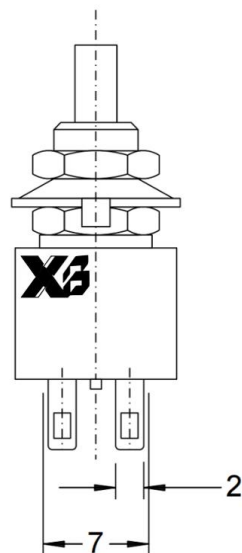


CAD FILE:

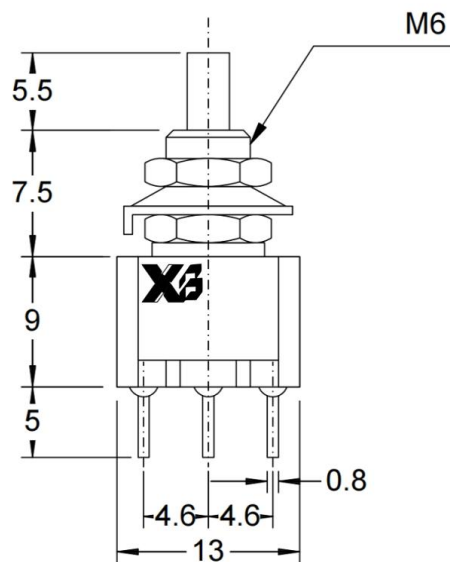


SCHEMATIC


CIRCUIT : ON-ON(2P2T)

## SPECIFICATIONS

|                       |                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------|
| CONTACT RATING        | : 5A with resistive load @ 120 VAC or 28 VDC.                                          |
| ELECTRICAL LIFE       | : 50,000 make-and-break cycles at full load.                                           |
| CONTACT RESISTANCE    | : 10mΩ max. initial @ 2.4 VDC. 100mA<br>for both coin silver and gold plated contacts. |
| INSULATION RESISTANCE | : 1,000MΩ min.                                                                         |
| DIELECTRIC STRENGTH   | : 1,000V RMS @ sea level.                                                              |
| OPERATING TEMPERATURE | : -30°C to 130°C.                                                                      |



配件：螺母



配件：菊花介

注：“\*”表示关键尺寸(4个).

|     |         |                 |      |                 |                       |       |           |                          |                      |            |
|-----|---------|-----------------|------|-----------------|-----------------------|-------|-----------|--------------------------|----------------------|------------|
| 8   |         |                 |      |                 | TOLERANCE             |       |           |                          |                      |            |
| 7   |         |                 |      |                 | UNLESS SPECIFIED      |       |           |                          |                      |            |
| 6   |         |                 |      |                 | WITHIN 1.5mm : ±0.1mm | A     | 2012-9-25 | 初版                       |                      | ZENQ. CHEN |
| 5   |         |                 |      |                 | OVER 1.5mm : ±0.2mm   | ISSUE | DATE      | DESCRIPTIONS OF REVISION |                      | APPD.      |
| 4   | CONTACT | SUS             | 1    | Ag CLAD         | TITLE : Button switch |       |           | UNIT : mm                | DRWG NO.: XB-PB-102M |            |
| 3   | CASE    | PPA/BRASS SRTIP | 1    | BLACK/Ag PLATED | MODEL: XB-PB-102M     |       |           | SCALE: 5:1               | DWN.                 | JUN. YANG  |
| 2   | COVER   | STEEL STRIP     | 1    | Ni PLATED       |                       |       |           |                          | 2012-9-25            |            |
| 1   | KNOB    | PPA             | 1    | BLACK           |                       |       |           |                          | CHK'D                | DONG. PANG |
|     |         |                 |      |                 |                       |       |           |                          | 2012-9-25            |            |
| NO. | PARTS   | MATERIALS       | Q'TY | FINISH          |                       |       |           |                          | APPD.                | ZENQ. CHEN |
|     |         |                 |      |                 |                       |       |           |                          | 2012-9-25            |            |