

SPECIFICATION: 3 A max. @ 125 VAC.

1 A max. @ 250 VAC.

1 A max. @ 250 VAC.

MECHANICAL LIFE:50,000 make-and-break cycles.

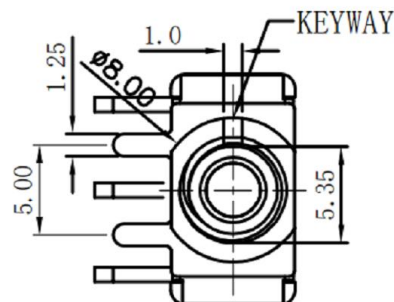
CONTACT RESISTANCE: 20mΩ max. initial @2-4VDC



100mA for both silver.

INSULATION RESISTANCE: 1000 M Ω min.

DIELECTRIC STRENGTH: 1500 VAC min.

OPERATING TEMPERATURE: -30°C to +85°C.



<u>SWITCH FUNCTION</u>		
Model	POS. 1	POS. 2
NO.		
Term. Comm.	ON	ON
SCHEMATIC		

Materials

CASE: PPA (94V-0)

HOUSING: Stainless Steel.

ACTUATOR: PBT.

BUSHING: Alloy ,nickel plated.

CONTACT/TERMINALS: Copper alloy silver plated.

注：“*”表示关键尺寸(4个).

8					TOLERANCE							
7					UNLESS SPECIFIED							
6					WITHIN 1.5mm : ± 0.1 mm		A	2012-9-25	初 版			ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm		ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Button switch				UNIT : mm	DRWG NO.: XB-PB-103M		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-PB-103M				SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					CHK'D	DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK						APPD.	ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH								