


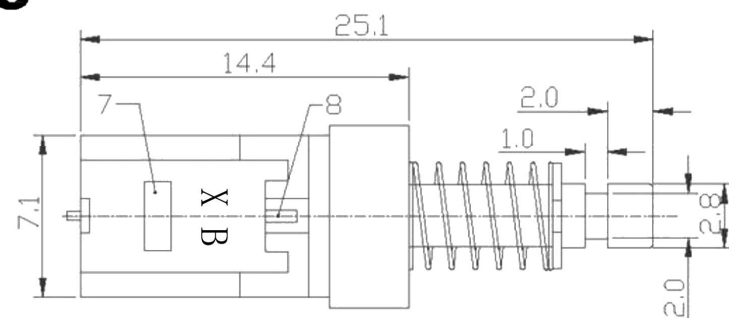
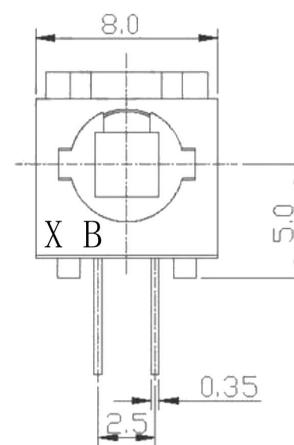


ROHS

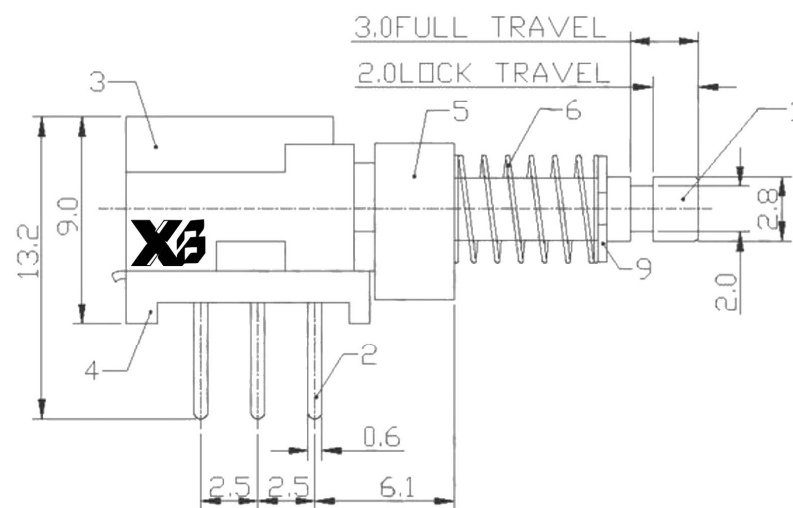

P . C . B LAYOUT



ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWICH
Model: XB-PBS-22D03
Rating: 0.3A 0.5A 12V 30V DC
Function: 2P2T
Timing: Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : PUSH BUTTON SWITCH

MODEL : PBS-22D03 (W106)



TOLERANCE
<=1.5mm ±0.1
>=1.5mm±0.2
>=5mm ±0.3

ANGLE
±2°

10	CONTACT CLIP	PBS STRIP	2	Ag CLAD
9	RING	IRON STRIP	1	Sn PLATED
8	CAM STICK	STEEL WIRE	1	NATURE
7	SPRING PLATE	SUS	1	NATURE
6	SPRING	STEEL WIRE	1	NATURE
5	SLEEVE	POM	1	GRAY
4	CASE	NYLON	1	GRAY
3	COVER	PBT	1	GRAY
2	TERMINAL	BRASS STRIP	6	Ag PLATED
1	KNOB	POM	1	WHITE
NO.	PART NAME	MATERIAL	QTY.	FINISHING

UNIT : MM	DWN.	DATE	
SCALE : 3 : 1	CHK'D	DATE	
VERSION	01	APPD.	DATE