


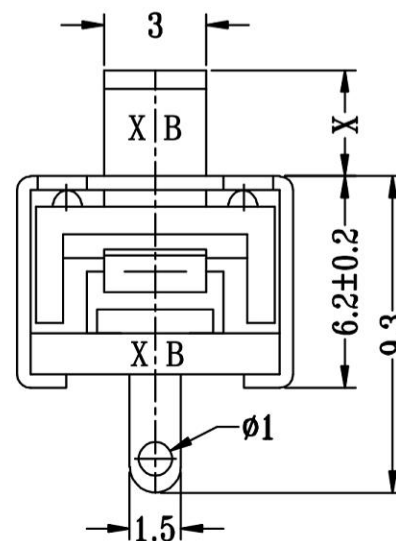
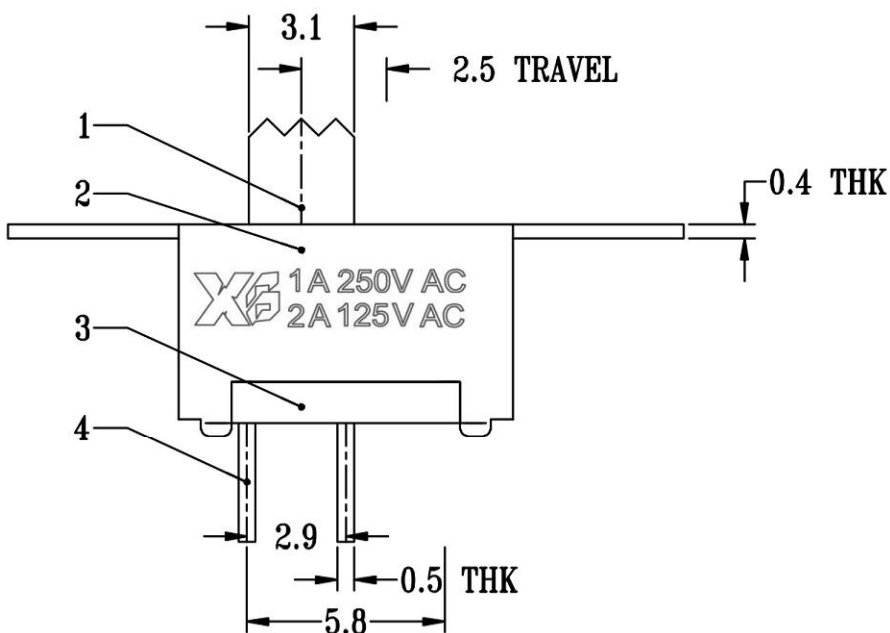


ROHS

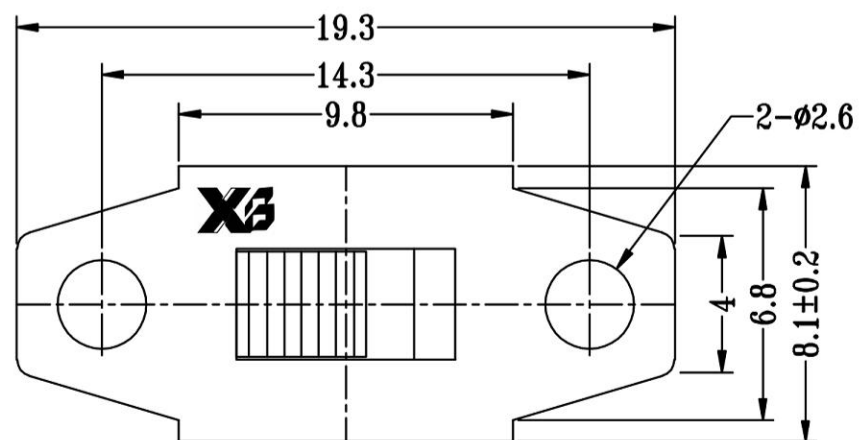

P.C.B LAYOUT
BOTTOM VIEW




SCHEMATIC (NON-SHORTING)

SPECIFICATION (INITIAL)

RATING:	1A 2A 125V 250 AC
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 1500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	300±100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)

X:2-10MM

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD										
		TITLE : XB SLIDE SWITCH										
		MODEL : XB-SS-12E88-2P-E 1P2T										
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLBRANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°					
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE								
VERSION	01	APPD.	FEI. LONG. HE	DATE								
								7	SPRING	STEEL WIRE	1	NATURE
								6	STEEL BALL	STEEL	1	NATURE
								5	BOARD	PHENOLIC RESIN	1	NATURE
								4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
								3	FRAME	IRON STRIP	1	Ni PLATED
								2	TERMINAL	BRASS STRIP	8	Ag PLATED
								1	KNOB	POM	1	BLACK
								NO.	PART NAME	MATERIAL	QTY.	FINISHING