

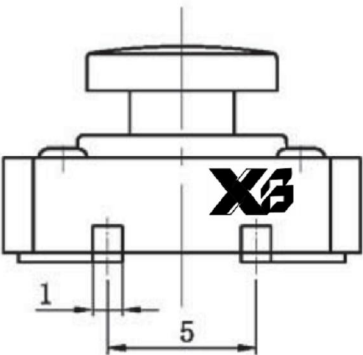
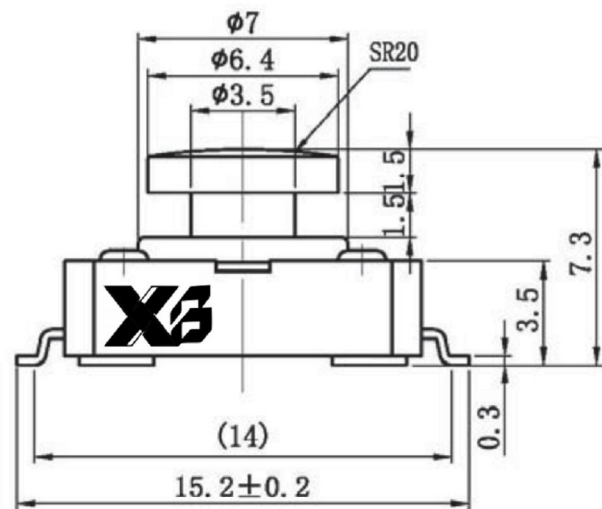
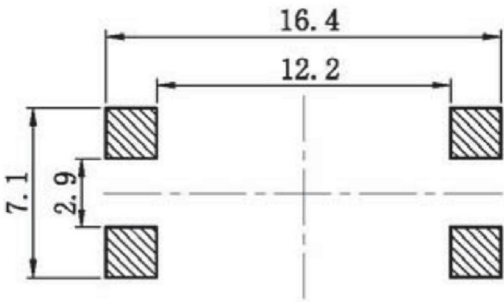


ROHS

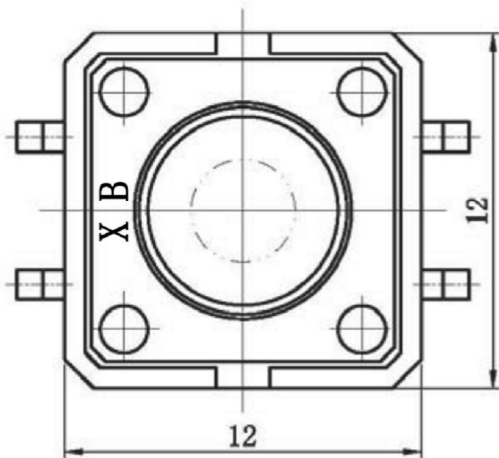

Circuit diagram



P. C. B LAYOUT  
BOTTOM VIEW

SPECIFICATIONS:

- 1、Rating: DC12V 50mA
- 2、Contact Resistance: 50mΩ MAX.
- 3、Insulation Resistance: 100MΩ MIN.
- 4、Withstand Voltage: AC 250V for 1 minute
- 5、Travel: 0.3±0.1mm
- 6、Operating Force: 260±50gf
- 7、Life: 1,000,000 Cycles MIN.
- 8、General TOLERANCE: ±0.3mm.

| NO. | NAME     | MATERIAL | NATIONALITY  | QTY. | SURFACE                     |
|-----|----------|----------|--------------|------|-----------------------------|
| 1   | TERMINAL | PPA      | CHINA TAIWAN | 1    | Silver plating              |
| 2   | CASE     | PPA      | CHINA TAIWAN | 1    | Black                       |
| 3   | CONTACT  | SUS301   | KOREA 1      |      | Contact side silver plating |
| 4   | COVER    | Brass    | CHINA        | 1    | CuSn plating                |
| 5   | STEM     | PPA      | CHINA        | 1    | Black                       |

|               |                                                      |       |               |      |                                                               |  |                   |  |     |            |             |      |           |
|---------------|------------------------------------------------------|-------|---------------|------|---------------------------------------------------------------|--|-------------------|--|-----|------------|-------------|------|-----------|
|               | 东莞市溪榜电子有限公司<br>DONG GUAN XI BANG ELECTRONICS CO.,LTD |       |               |      |                                                               |  |                   |  | 8   | REEL       | PS          | 1    | BLUE      |
|               |                                                      |       |               |      |                                                               |  |                   |  | 7   | CARRIER    | PS          | 1    | CLEAR     |
| UNIT : MM     |                                                      | DWN.  | ZENQ. CHEN    | DATE | TOLERANCE<br><=1.5mm ± 0.1<br>> 1.5mm ± 0.2<br>>=10.0mm ± 0.3 |  | ANGLE TOL<br>± 2° |  | 6   | COVER TAPE | PS          | 1    | CLEAR     |
| SCALE : 5 : 1 |                                                      | CHK'D | PENG. GAO     | DATE |                                                               |  |                   |  | 5   | CONTACT    | PBS STRIP   | 1    | Ag CLAD   |
| VERSION 01    |                                                      | APPD. | FEI. LONG. HE | DATE |                                                               |  |                   |  | 4   | COVER      | IRON STRIP  | 1    | Ni PLATED |
|               |                                                      |       |               |      |                                                               |  |                   |  | 3   | CASE       | NYLON       | 1    | BLACK     |
|               |                                                      |       |               |      |                                                               |  |                   |  | 2   | TERMINAL   | BRASS STRIP | 2    | Ag PLATED |
|               |                                                      |       |               |      |                                                               |  |                   |  | 1   | KNOB       | NYLON       | 1    | BLACK     |
|               |                                                      |       |               |      |                                                               |  |                   |  | NO. | PART NAME  | MATERIAL    | QTY. | FINISHING |