

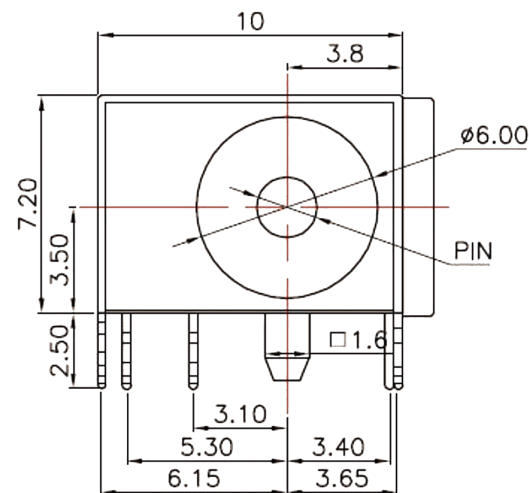


CAD FILE:

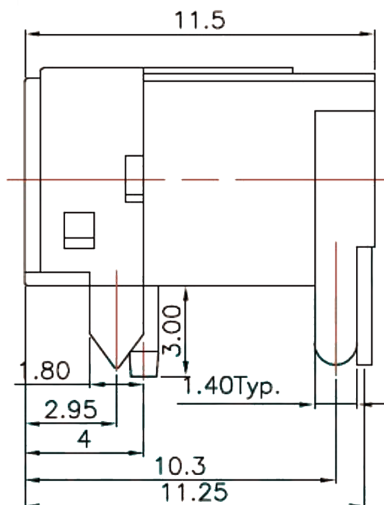

P.C.B LAYOUT(copper-sided view)

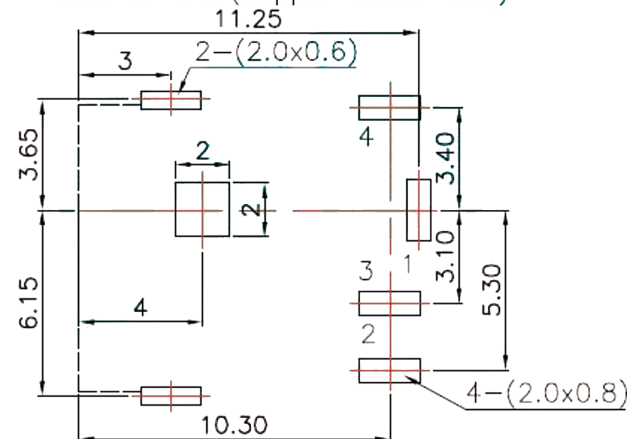

Model No.	DC-044C-A	DC-044C-B
Schematic		
Model No.	DC-044C-C	DC-044C-D
Schematic		

Model No.	1	2	3
PIN	ø1.65	ø2.0	ø2.5

Rating: **3A 5A**30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack		UNIT : mm	DRWG NO.: XB-DC-044A-2.5A-2.0	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:		SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED				CHK'D	DONG. PANG
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN
NO.	PARTS	MATERIALS	Q'TY	FINISH					



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.