
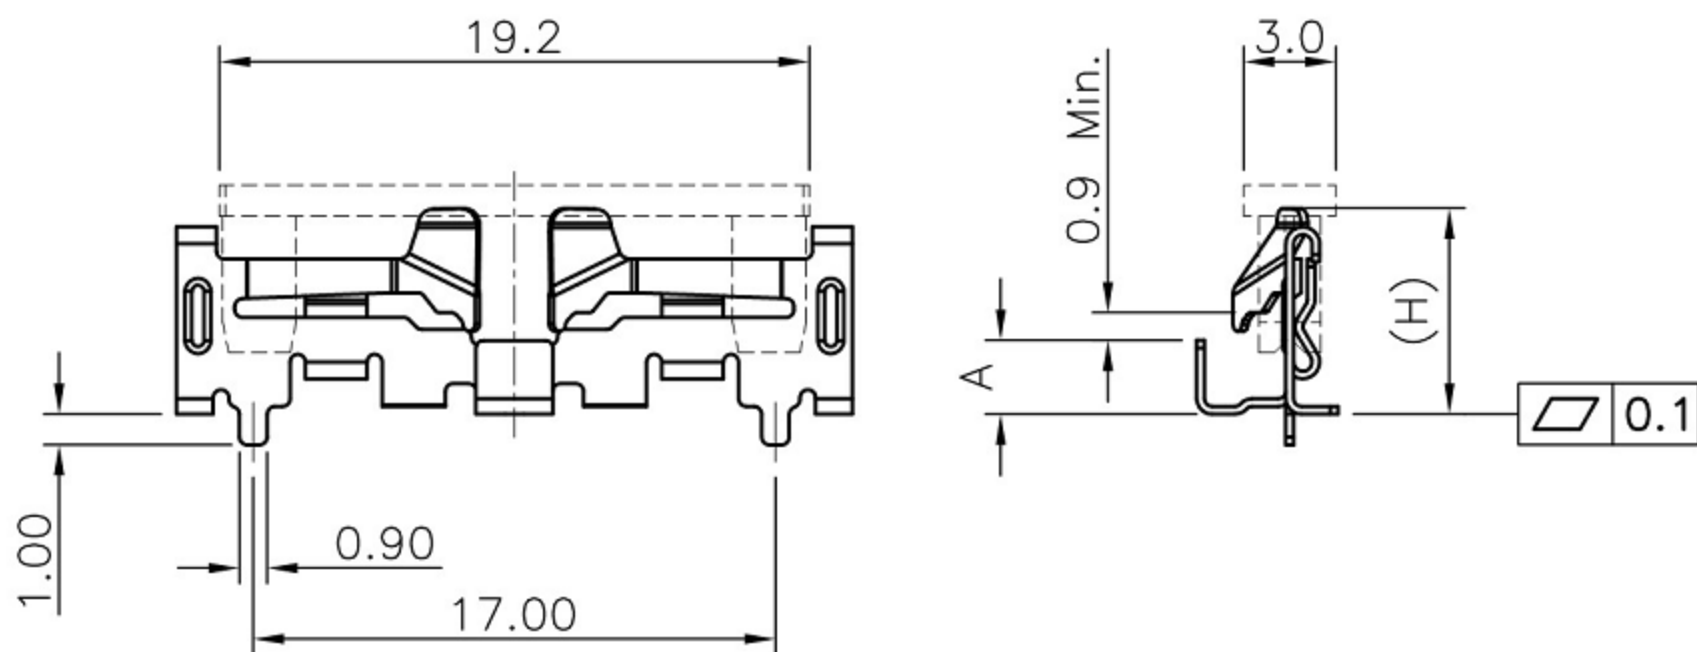


CAD FILE:

ROHS

NOTES:

1. Material: stainless steel (SUS301-3/4H) 0.25t
2. Finish: 80~120u" tin plating under 20~40u" nickel plating over all
3. Burr 0.03mm max.
4. Coplanarity is 0.1mm max.
5. RoHS compliant
6. Packaging: tape and reel

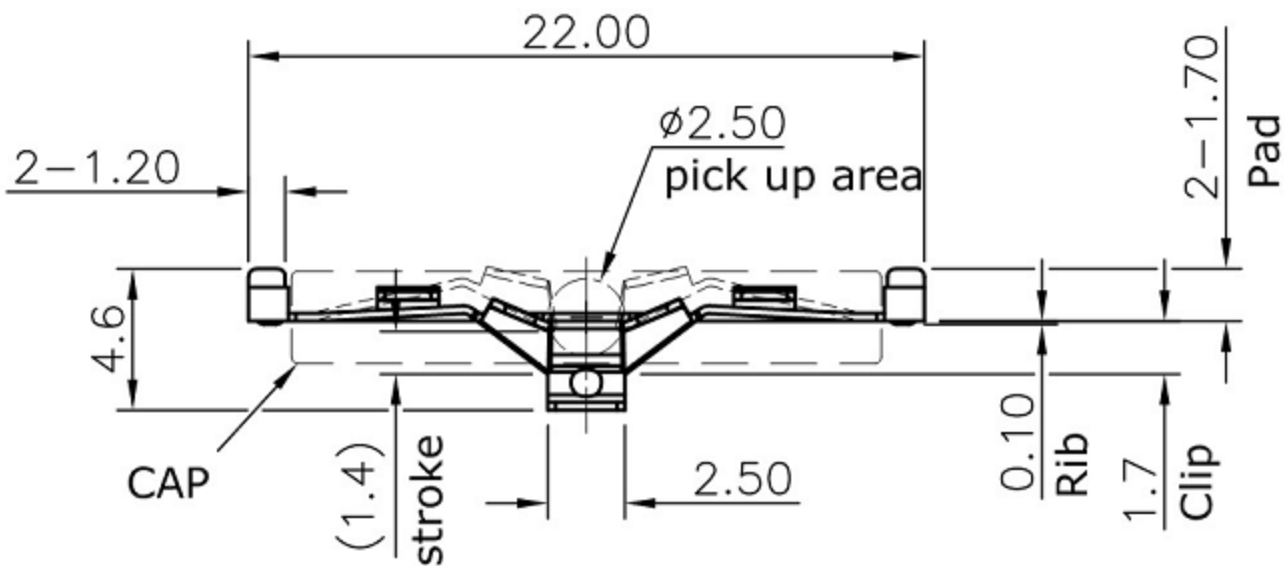


How to order:

123A- XX L 1


XX: Connector height
L: Latch
1: serial number

XX	P/N	Dim. A	Dim. H
30	123A- 30 L 1	1.40	5.7
40	123A- 40 L 1	2.40	6.7
58	123A- 58 L 1	4.05	8.4

REV.	DESCRIPTION	DRAWN	DATE
2	Revised PCB layout, release drawing	FROS	2021/06/23
3	Revised packaging	FROS	2021/08/03
3.1	Revised tolerance	FROS	2021/09/28

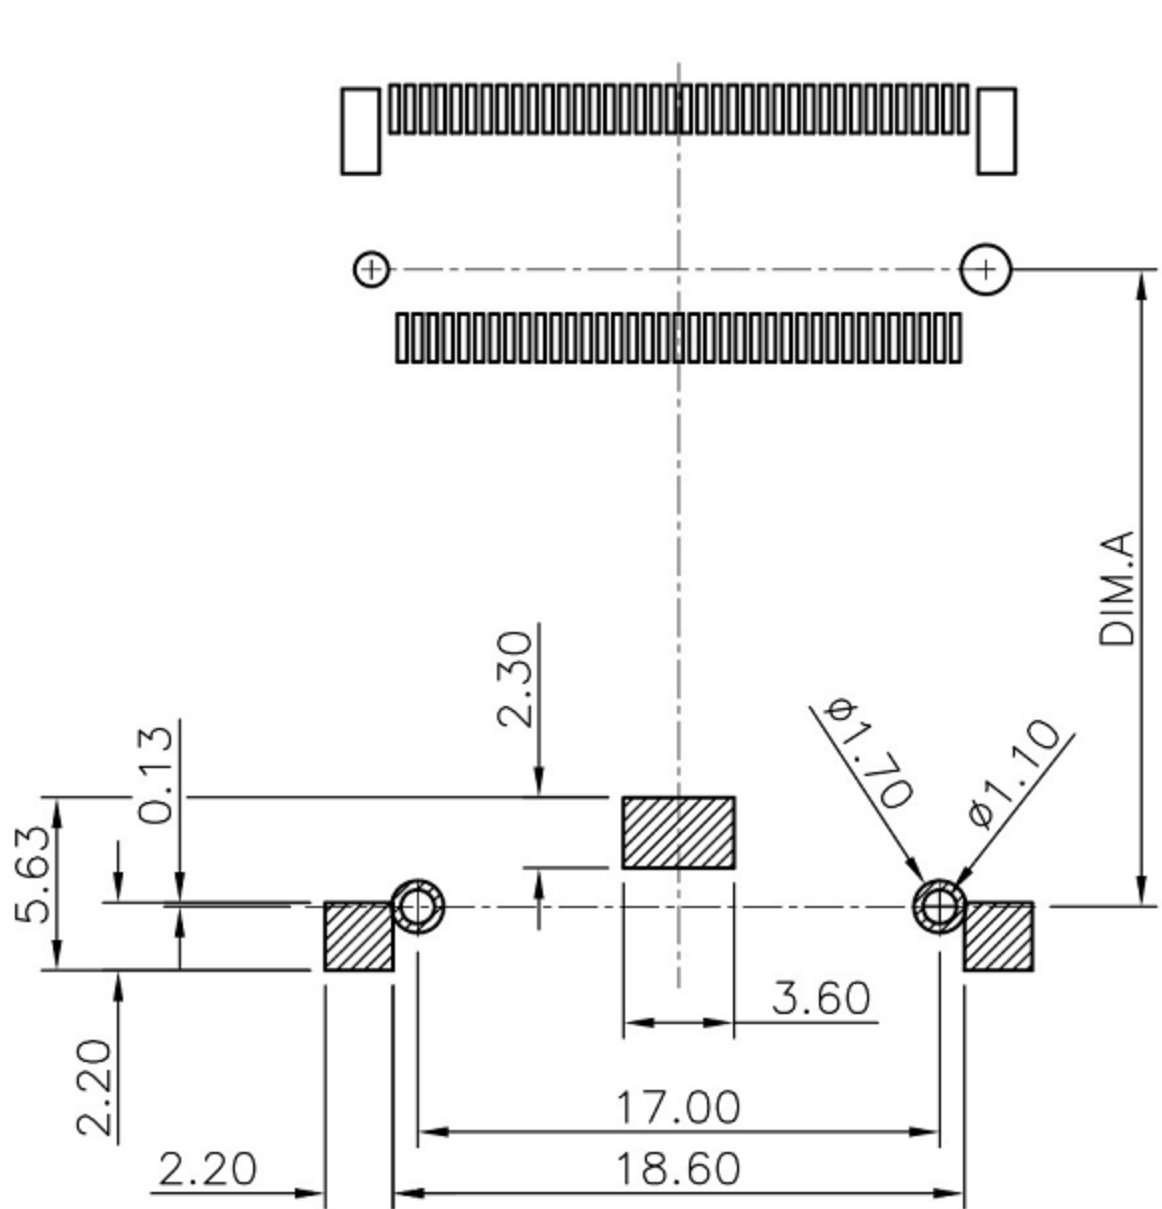

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.05mm

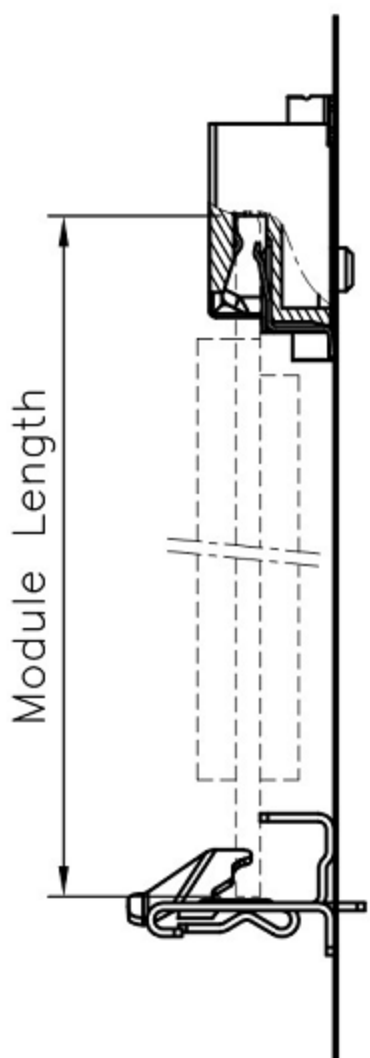

Module Length	DIM.A
42	40.58
60	58.58
80	78.58
110	108.58

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : PCB卡插座			UNIT : mm	DRWG NO.: XB-123A-XXL1_B_3.1
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: PCB Card Socket			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					