

F

E

D

C

B

A

F


E

D

C

B


A

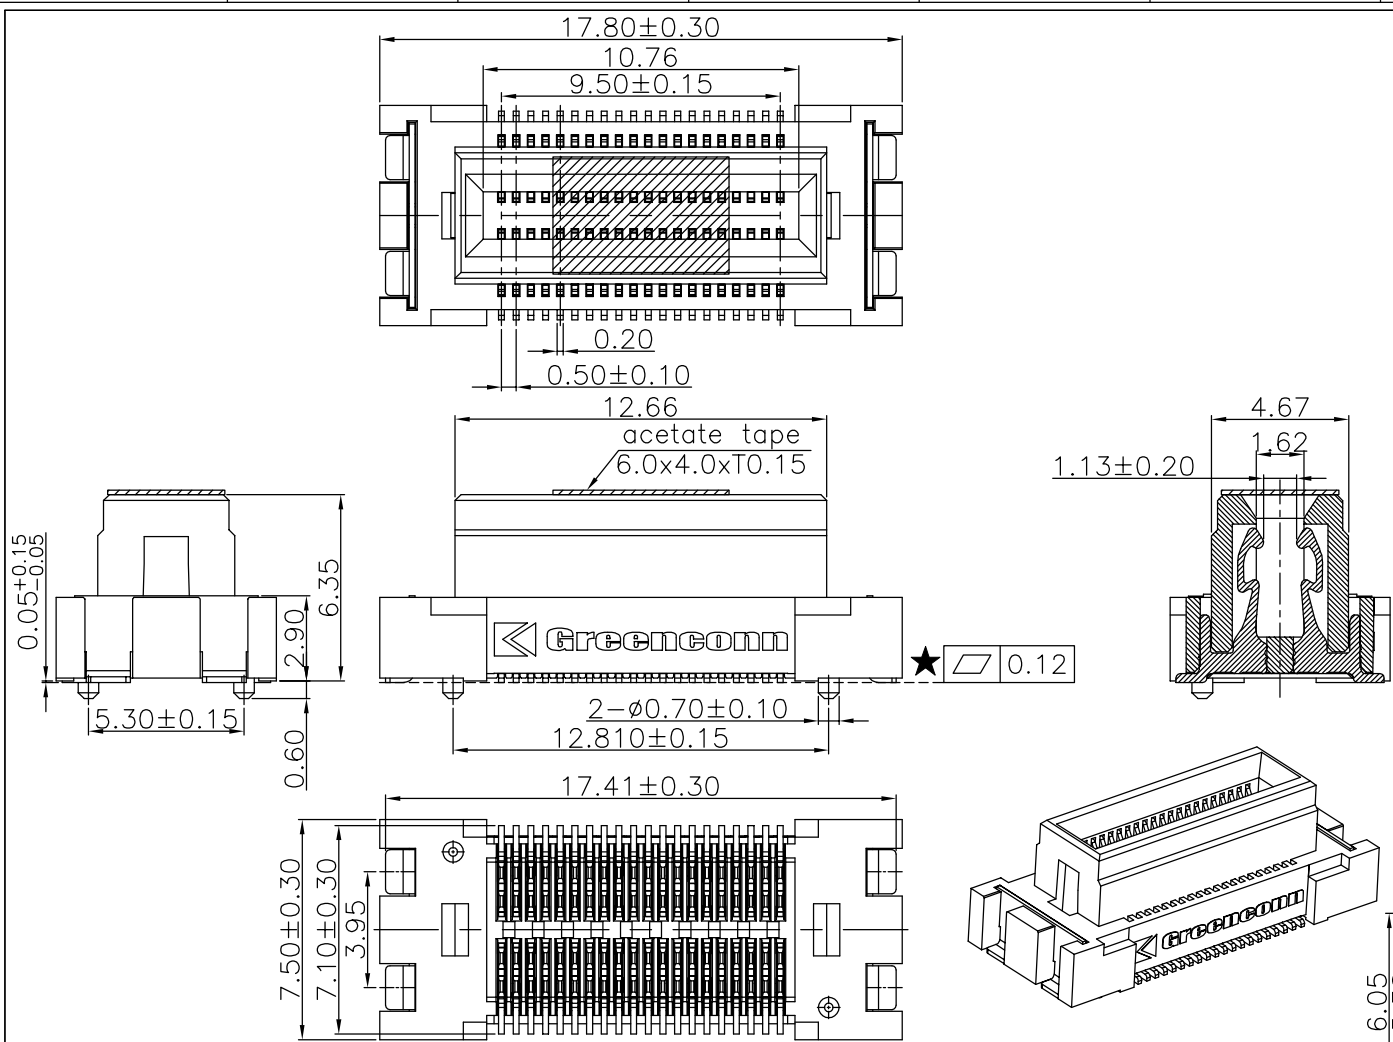

Specifications
Current Rating:0.4Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:250VAC/60S
Contact Resistance:100mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
★All materials must meet GREENCONN hazardous substances control standards.
“★”: Critical Characteristics. indicates product characteristics, functionalities, and manufacturing processes regarding to customer’s specifications
“☆”:Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Ordering Information
XB-CBAC-229

No. of Pins per Row 20	Standard Plating 79=5u"AU/80~160u"MATTE TIN 75=0.6u"AU/80~160u"MATTE TIN	Color 1=Black	Standard Packing H=Acetate Tape+Tape&Reel
---------------------------	--	------------------	--

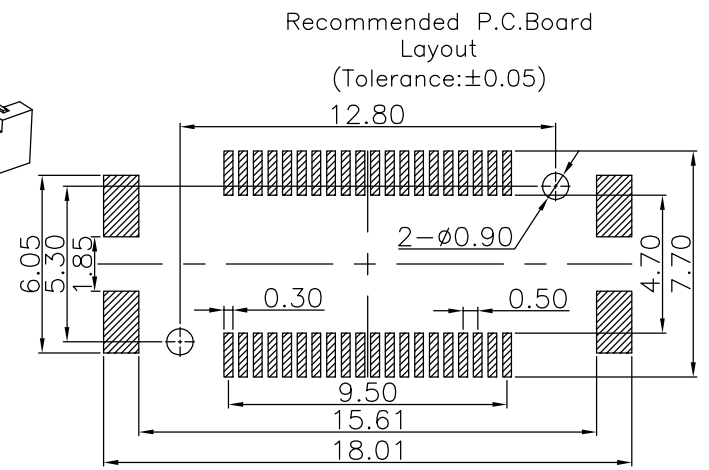

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			3RD.ANG PROJ.  PAGE. 1/1	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. XB-CBAC-229		TITLE. 0.5mm PITCH BTB FLOATING CONNECTOR	
REV. A	UNIT. mm	SCALE. 4:1		X.*±5.0°	X.±0.30			PART NO. XB-CBAC-229			
				.X*±3.0°	.X±0.25						
				.XX*±2.0°	.XX±0.15						
				.XXX*±1.0°	.XXX±0.10						