

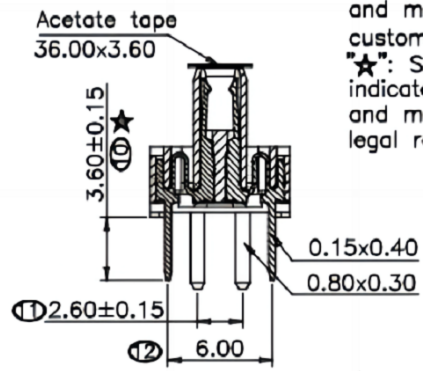


Specifications
 Current Rating:1.0Amp
 Insulation Resistance:500MΩMin.
 Dielectric Withstanding Voltage:250VAC
 Contact Resistance:100mΩMax.
 Operating Temperature:-40°C to +105°C
Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 ★All materials must meet GREENCONN hazardous substances control standards.

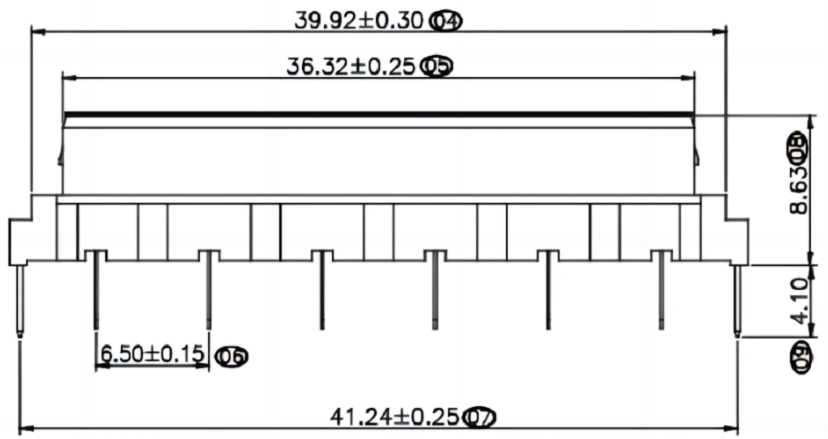

★: Critical Characteristics.
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 ★: Safety Features
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Recommended P.C.Board Layout
 (Tolerance:±0.05)

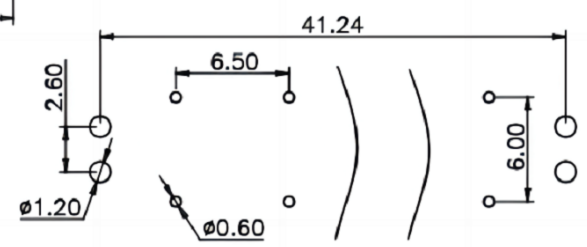

Ordering Information

C BZZ201 - 06 XX A 001 C 1 S X
 No. of Pins per Row 06
 Standard Plating 06=5u"gold on contact/
 gold flash on other area
 Color 1=Black
 H=Acetate tape+Tape&Reel

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONIC CO., LTD.

3RD.ANG PROJ.

 SCALE: 3:1
 PAGE: 1/1

GENERAL TOLERANCE	
X.*±5.0"	X.±0.30
.X*±3.0"	.X±0.25
.XX*±2.0"	.XX±0.15
.XXX*±1.0"	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	XB-GBZZ-201
PART NO.	XB-GBZZ-201

TITLE.	6.50mm PITCH FEMALE FLOATING CONNECTOR MATING H12.50mm
--------	--