

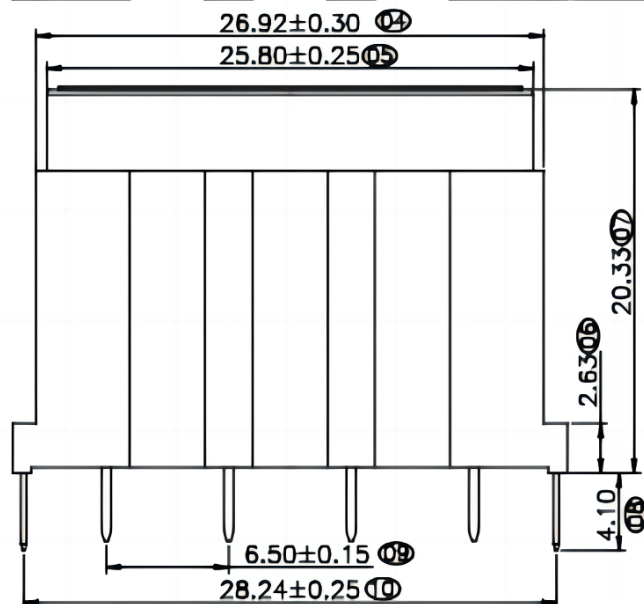


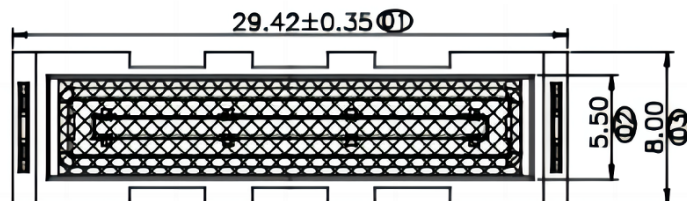

Acetate tape
24.50x5.00

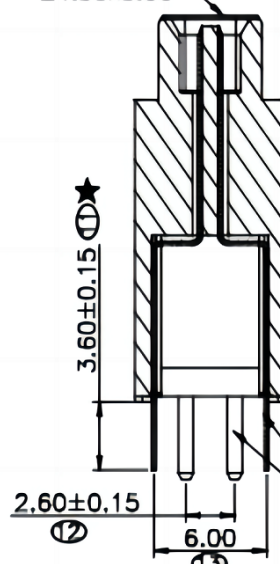

Specifications
Current Rating:1.0Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:250VAC
Contact Resistance:100mΩMax.
Operating Temperature:-40°C to +105°C
Materials


Contact Material:Phosphor Bronze
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 LCP or
the equivalent material

★ All materials must meet GREENCONN
hazardous substances control standards.

★: Critical Characteristics,
indicates product characteristics, functionalities,
and manufacturing processes regarding to
customer's specifications

★: Safety Features
indicates product characteristics, functionalities,
and manufacturing processes complying to
legal regulations stated by local government

Recommended P.C.Board
Layout
(Tolerance:±0.05)

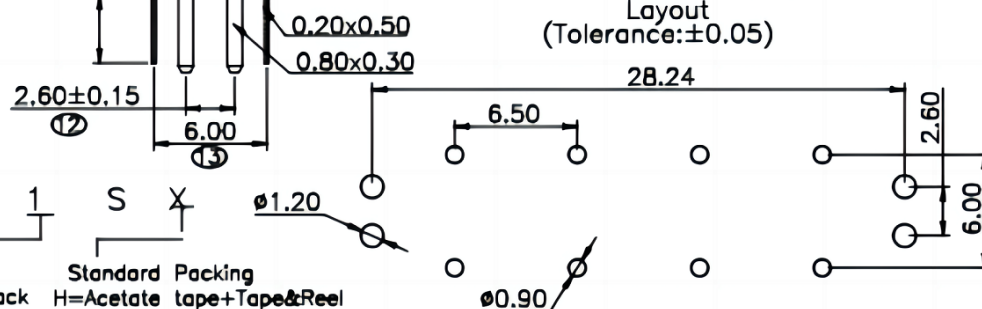

Ordering Information

G BZZ203 - 04 XX A 001 C 1 S X

No. of Pins per Row
04

Standard Plating
08=5u"gold on contact/
gold flash on other area

Color
1=Black

Standard Packing
H=Acetate tape+Tape&Reel

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONIC CO., LTD.

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0"	X.±0.30
.X*±3.0"	.X±0.25
.XX*±2.0"	.XX±0.15
.XXX*±1.0"	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

XB-GBZZ-203

PART NO.

XB-GBZZ-203

TITLE.

6.50mm PITCH MALE
FLOATING CONNECTOR
MATING H25.00mm