


Specifications

Current Rating : 7.9 Ampere
Insulation Resistance : 1000 MΩ Min
Dielectric Withstanding : 1500V AC
Contact Resistance : 20 mΩ Max
Operating Temperature : -40°C to +105°C




Materials

Contact Material : Phosphor Bronze
Insulation Material : High Temperature Thermoplastic, 94V-0 LCP



All materials must meet Greennonn's requirements for environmental protection.

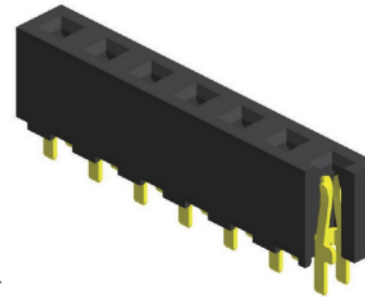

Mating with



P.S. : Suggested mating pin length : 3.8 ~8.5 mm



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B	
02	7.92	3.96		11	43.56	39.60		21	83.16	79.20	
03	11.88	7.92		12	47.52	43.56		22	87.12	83.16	
04	15.84	11.88		13	51.48	47.52		23	91.08	87.12	
05	19.80	15.84		14	55.44	51.48		24	95.04	91.08	
06	23.76	19.80		15	59.40	55.44					
07	27.72	23.76		16	63.36	59.40					
08	31.68	27.72		17	67.32	63.36					
09	35.64	31.68		18	71.28	67.32					
10	39.60	35.64		19	75.24	71.28					
				20	79.20	75.24					



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGN

CHECKED:
AUDITED:
APPROVED:

DATE:

DATE:
DATE:
DATE:

DWG. NO.

XB-PM-A-396-102

PART NO.

XB-PM-A-396-102

TITLE

2.00 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 4.30H