
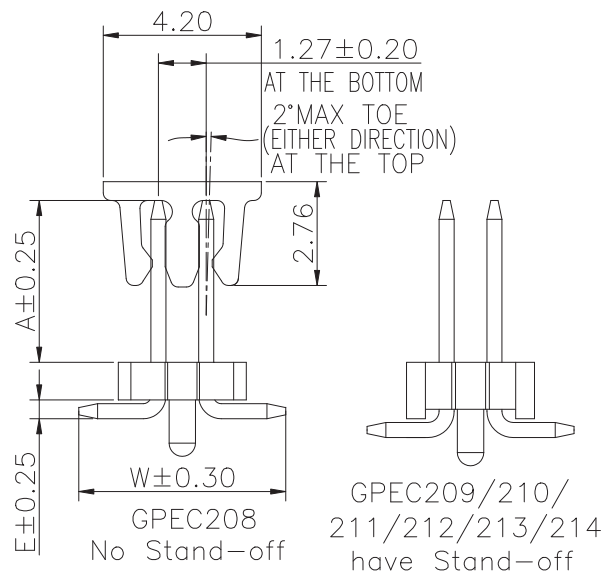
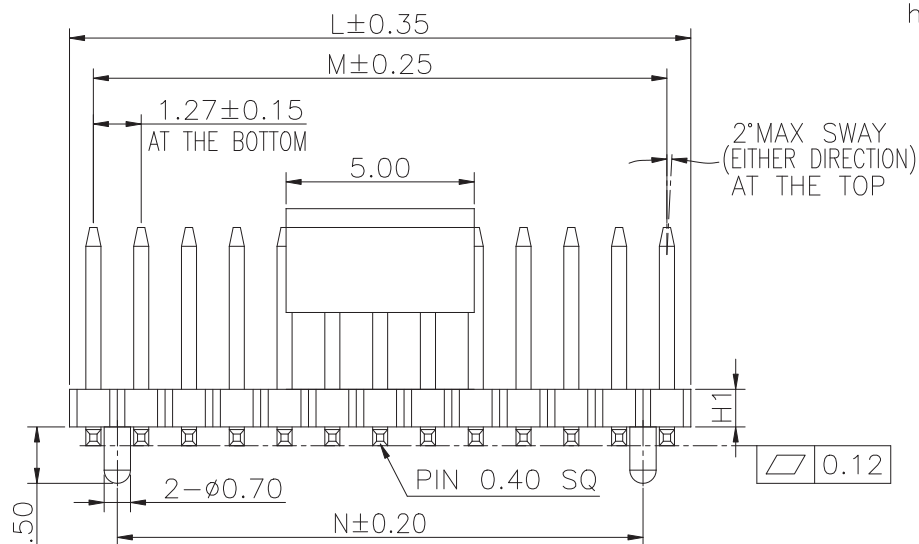


The Cap used above 4PIN
2,3pins with tape&reel packing

Specifications

Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Brass
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet Greenconn hazardous substances control standards.

Recommended P.C.Board Layout (Tolerance:±0.05)

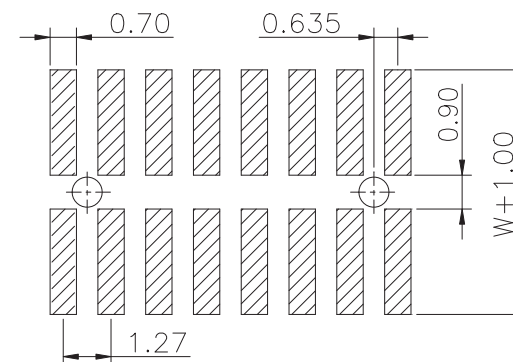

Ordering Information XB-PZ-C-127-208

Plastic specifications		Water code		Positioning column information		Pin length	
1=Single row		08:H1=1.00		A=No locating post		See the drawing	
2=Dual row		09:H1=1.50		B=Round post			
3=Tripe row		10:H1=1.70		C=Square post			
4=Quadruple		11:H1=2.00					
		12:H1=2.50		Plating code			
		13:H1=2.70		01=Tin			
		14:H1=3.00		02=Gold Flash			
				05=Gold Flash/Tin			
				22=Matte Tin			
		No. of Pins per Row		Insulator Material			
		02~50		R=Nylon(Halogen Free)			
				C=LCP			

Color		Packing code	
1=Black		A=Box	
2=White		B=Tray	
3=Yellow		C=Tube	
E=Beige		D=Tape&Reel	
		E=Cap+Tube	
		F=Cap+Tape&Reel	
		G=Acetate Tape+Tube	
		H=Acetate Tape+Tape&Reel	

No. of PIN/ROW	Dimension Information			No. of PIN/ROW	Dimension Information		
	L	M	N		L	M	N
02	2.54	1.27		27	34.29	33.02	31.75
03	3.81	2.54	1.27	28	35.56	34.29	33.02
04	5.08	3.81	2.54	29	36.83	35.56	34.29
05	6.35	5.08	3.81	30	38.10	36.83	35.56
06	7.62	6.35	5.08	31	39.37	38.10	36.83
07	8.89	7.62	6.35	32	40.64	39.37	38.10
08	10.16	8.89	7.62	33	41.91	40.64	39.37
09	11.43	10.16	8.89	34	43.18	41.91	40.64
10	12.70	11.43	10.16	35	44.45	43.18	41.91
11	13.97	12.70	11.43	36	45.72	44.45	43.18
12	15.24	13.97	12.70	37	46.99	45.72	44.45
13	16.51	15.24	13.97	38	48.26	46.99	45.72
14	17.78	16.51	15.24	39	49.53	48.26	46.99
15	19.05	17.78	16.51	40	50.80	49.53	48.26
16	20.32	19.05	17.78	41	52.07	50.80	49.53
17	21.59	20.32	19.05	42	53.34	52.07	50.80
18	22.86	21.59	20.32	43	54.61	53.34	52.07
19	24.13	22.86	21.59	44	55.88	54.61	53.34
20	25.40	24.13	22.86	45	57.15	55.88	54.61
21	26.67	25.40	24.13	46	58.42	57.15	55.88
22	27.94	26.67	25.40	47	59.69	58.42	57.15
23	29.21	27.94	26.67	48	60.96	59.69	58.42
24	30.48	29.21	27.94	49	62.23	60.96	59.69
25	31.75	30.48	29.21	50	63.50	62.23	60.96
26	33.02	31.75	30.48				

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX.±0.15
.XXX.*±1.0°	.XXX.±0.10

DWG. NO.
XB-PZ-C-127-208

PART NO.
XB-PZ-C-127-208

TITLE.
1.27 PIN HEADER
DUAL ROWS SMT TYPE
CONNECTOR


Specifications

Current Rating : 1.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 300V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C



Materials

Contact Material : Brass
 Insulation Material : High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

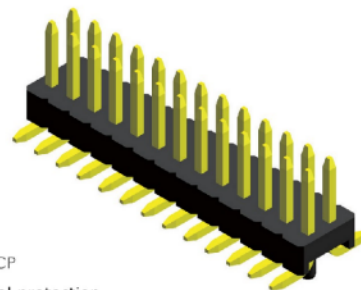

Mating with

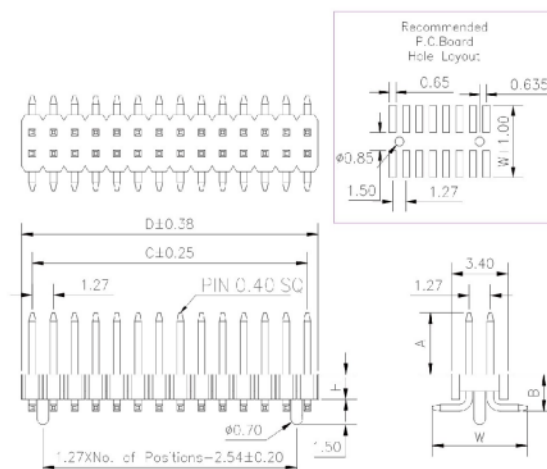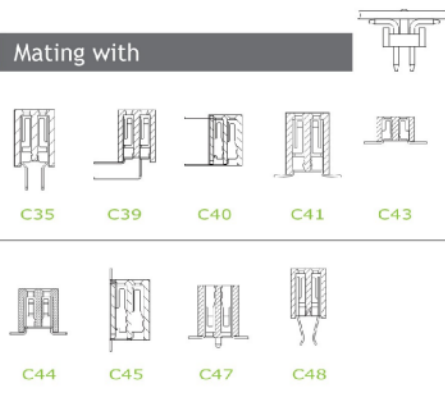

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
02	1.27	2.54		11	12.70	13.97		21	25.40	26.67		31	38.10	39.37	
03	2.54	3.81		12	13.97	15.24		22	26.67	27.94		32	39.37	40.64	
04	3.81	5.08		13	15.24	16.51		23	27.94	29.21		33	40.64	41.91	
05	5.08	6.35		14	16.51	17.78		24	29.21	30.48					
06	6.35	7.62		15	17.78	19.05		25	30.48	31.75					
07	7.62	8.89		16	19.05	20.32		26	31.75	33.02					
08	8.89	10.16		17	20.32	21.59		27	33.02	34.29					
09	10.16	11.43		18	21.59	22.86		28	34.29	35.56					
10	11.43	12.70		19	22.86	24.13		29	35.56	36.83					
				20	24.13	25.40		30	36.83	38.10					



东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGN:

CHECKED:

AUDITED:

APPROVED:

DATE:

DATE:

DATE:

DATE:

DWG. NO.

XB-PZ-C-127-208

PART NO.

XB-PZ-C-127-208

TITLE:

2.00 FEMALE HEADER
 SINGLE ROW DIP TYPE
 BASE 4.30H