




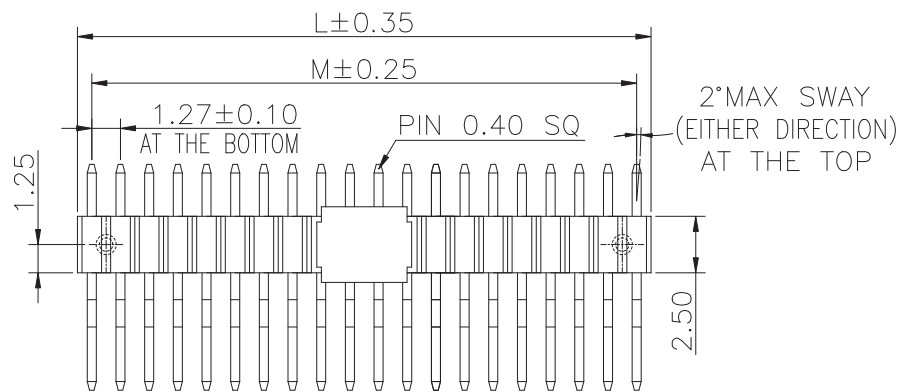



Recommended P.C.Board
Layout
(Tolerance:±0.05)

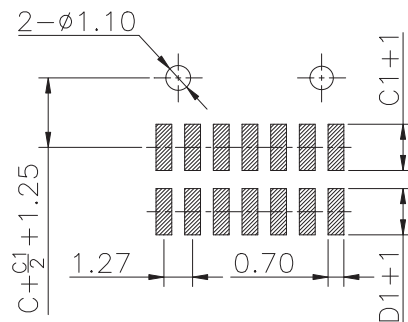

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Brass
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 LCP
or the equivalent material
All materials must meet Greenconn
hazardous substances control standards.

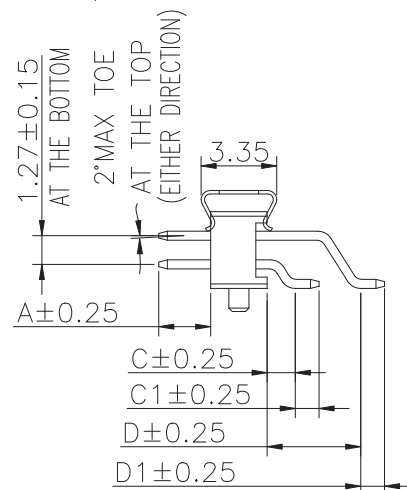


Acetate tape
(ø5.00x0.15)

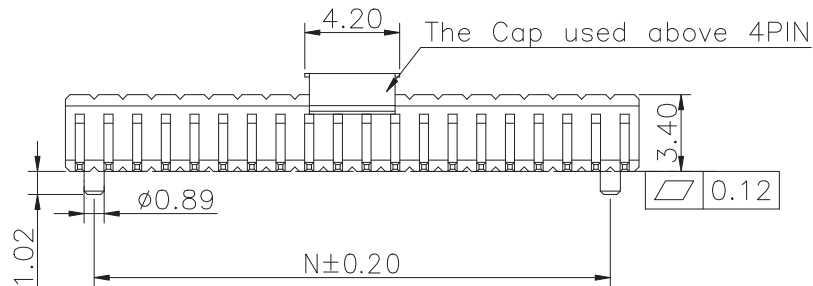

No. of PIN/ROW	Dimension Information		
	L	M	N
03	3.81	2.54	1.27
04	5.08	3.81	2.54
05	6.35	5.08	3.81
06	7.62	6.35	5.08
07	8.89	7.62	6.35
08	10.16	8.89	7.62
09	11.43	10.16	8.89
10	12.70	11.43	10.16
11	13.97	12.70	11.43
12	15.24	13.97	12.70
13	16.51	15.24	13.97
14	17.78	16.51	15.24
15	19.05	17.78	16.51
16	20.32	19.05	17.78
17	21.59	20.32	19.05
18	22.86	21.59	20.32
19	24.13	22.86	21.59
20	25.40	24.13	22.86
21	26.67	25.40	24.13
22	27.94	26.67	25.40
23	29.21	27.94	26.67
24	30.48	29.21	27.94
25	31.75	30.48	29.21
26	33.02	31.75	30.48
27	34.29	33.02	31.75
28	35.56	34.29	33.02
29	36.83	35.56	34.29
30	38.10	36.83	35.56
31	39.37	38.10	36.83
32	40.64	39.37	38.10
33	41.91	40.64	39.37

Ordering Information

XB-PZ-B-127-108

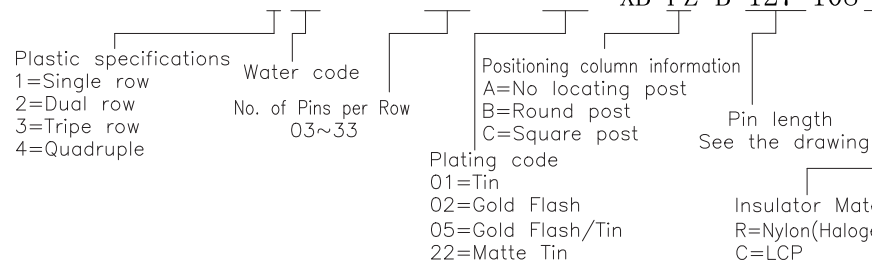

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 3:1 PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX±0.15
.XXX.*±1.0°	.XXX±0.10

DWG. NO.

XB-PZ-B-127-108

PART NO.

XB-PZ-B-127-108

TITLE.

1.27 MALE HEADER
DUAL ROWS SMT TYPE
SIDE ENTRY

Specifications

Current Rating : 1.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 300V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C






Materials

Contact Material : Brass
 Insulation Material : High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.



Mating with

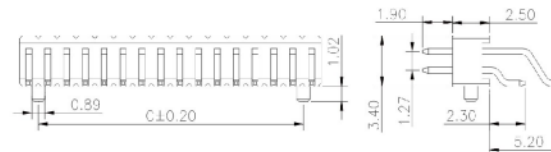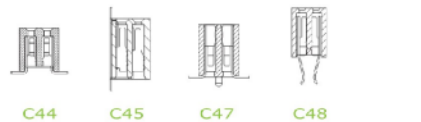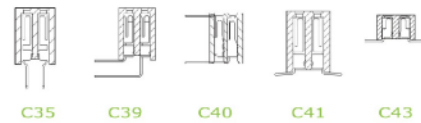

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
03	2.54	3.81	1.27	11	12.70	13.97	11.43	21	25.40	26.67	24.13	31	38.10	39.37	36.83
04	3.81	5.08	2.54	12	13.97	15.24	12.70	22	26.67	27.94	25.40	32	39.37	40.64	38.10
05	5.08	6.35	3.81	13	15.24	16.51	13.97	23	27.94	29.21	26.67	33	40.64	41.91	39.37
06	6.35	7.62	5.08	14	16.51	17.78	15.24	24	29.21	30.48	27.94				
07	7.62	8.89	6.35	15	17.78	19.05	16.51	25	30.48	31.75	29.21				
08	8.89	10.16	7.62	16	19.05	20.32	17.78	26	31.75	33.02	30.48				
09	10.16	11.43	8.89	17	20.32	21.59	19.05	27	33.02	34.29	31.75				
10	11.43	12.70	10.16	18	21.59	22.86	20.32	28	34.29	35.56	33.02				
				19	22.86	24.13	21.59	29	35.56	36.83	34.29				
				20	24.13	25.40	22.86	30	36.83	38.10	35.56				



东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1

GENERAL TOLERANCE

X.±5.0° X.±0.30
 .X'±3.0° .X±0.25
 .XX'±2.0° .XX±0.15
 .XXX'±1.0° .XXX±0.10

DESIGN

CHECKED:
 AUDITED:
 APPROVED:

DATE:

DATE:
 DATE:
 DATE:

DWG. NO.

XB-PZ-B-127-108

PART NO.

XB-PZ-B-127-108

TITLE

2.00 FEMALE HEADER
 SINGLE ROW DIP TYPE
 BASE 4.30H