


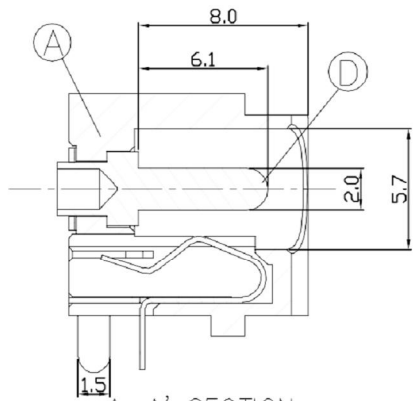
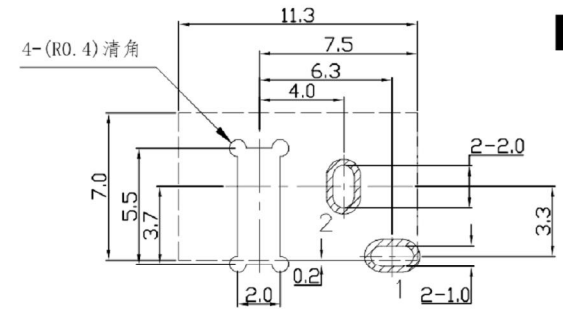
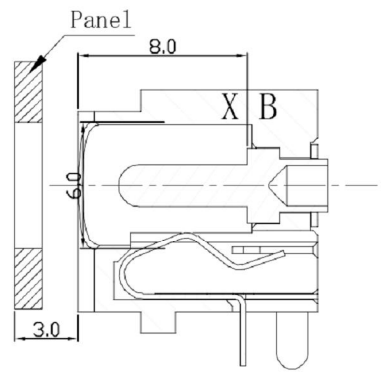

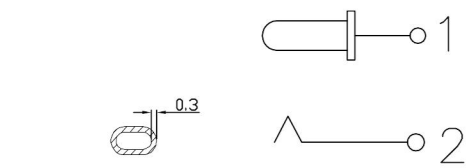


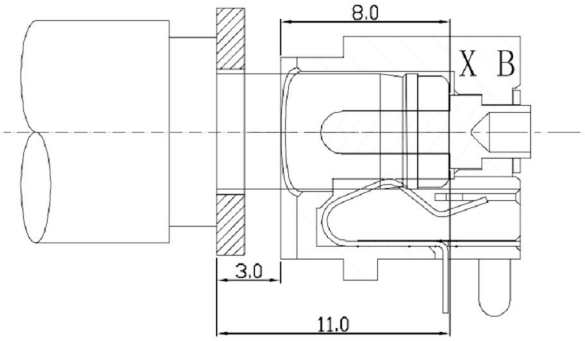

A-A' SECTION


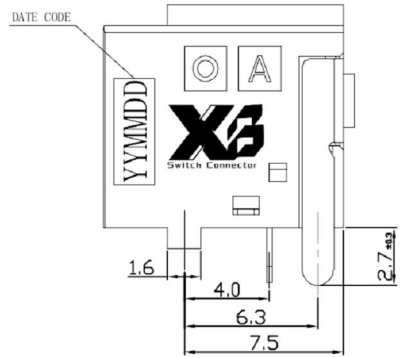


Recommended PCB Layout
<TOP VIEW>TOLERANCE: ±0.05

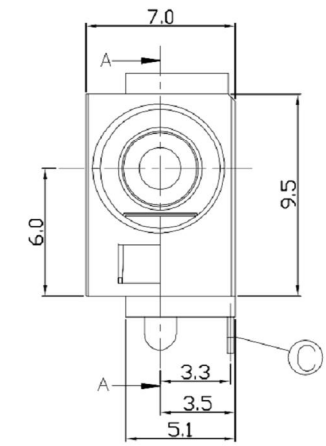

COPPER FOIL WIDTH SCHEMATIC

SCHEMATIC	1
CENTER PIN	2
	φ2.0mm
	φ2.5mm

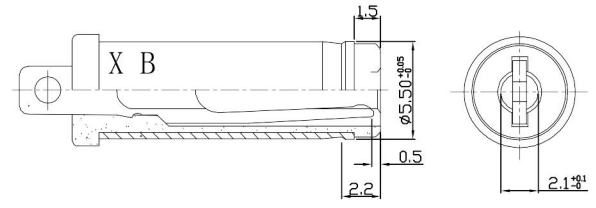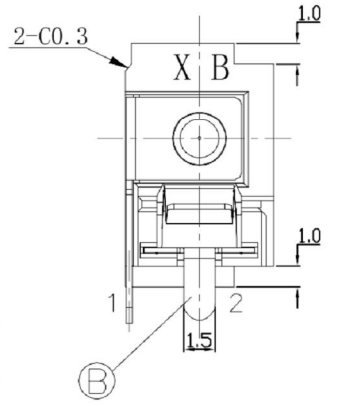

SPECIFICATION

- 1.Rating : DC 12V 30V , 30A 50A
- 2.Contact resistance : ≤30mΩ
- 3.Insulation resistance : ≥100MΩ
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

D	XB-DC-1195-04	PIN	1PCS	铜棒=φ2.0	镀银
C	XB-DC-1195-03	针脚	1PCS	磷铜=0.30	镀银
B	XB-DC-1195-02	弹片	1PCS	铜片=0.25	镀银
A	XB-DC-1195-01	塑料座	1PCS	PBT (BLACK)	黑色
序号	零件图代号	名称	数量	材料	镀层/颜色

				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD																			
TITLE : XB DC Power Jack								6 PIN				BRASS				1 Ni PLATED							
MODEL : XB-DC-1195								5 TERMINAL				BRASS STRIP t=0. 3				1 Ag PLATED							
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE		ANGLE TOL		4 SPRING TERMINAL C				PBS STRIP t=0. 25				1 Ag PLATED					
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE		<=1. 5mm ± 0. 1		± 2°		3 TERMINAL B				BRASS STRIP t=0. 3				1 Ag PLATED					
VERSION		01	APPD.	FEL. LONG. HE	DATE		> 1. 5mm ± 0. 2			2 TERMINAL A				BRASS STRIP t=0. 3				1 Ag PLATED					
						>=10. 0mm ± 0. 3				1 HOUSING				PBT UL94-V0				1 BLACK					
								NO.				PART NAME				MATERIAL				QTY.		FINISHING	