


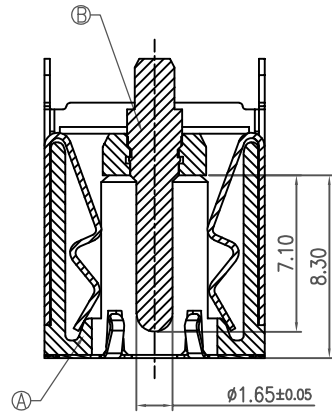
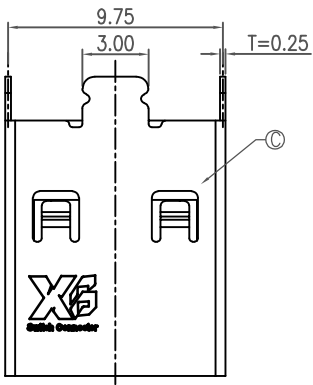
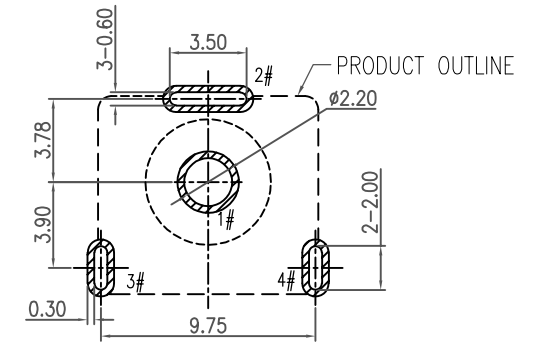
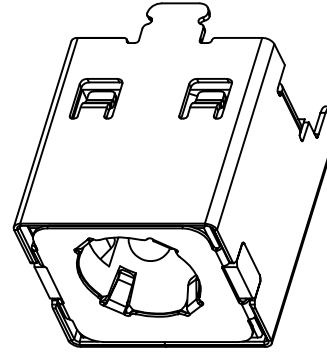


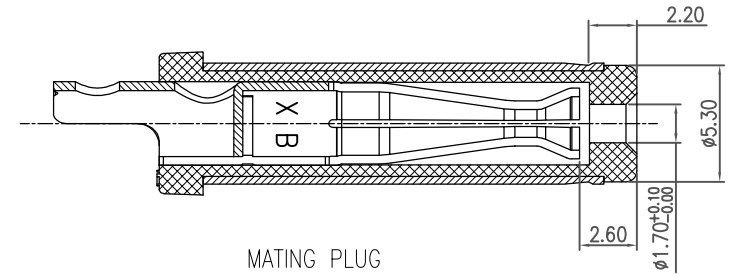

SECTION A-A

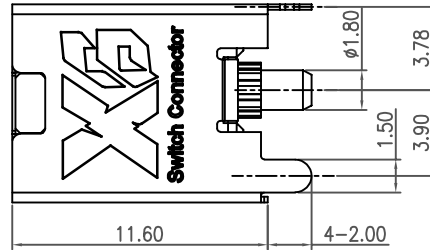


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

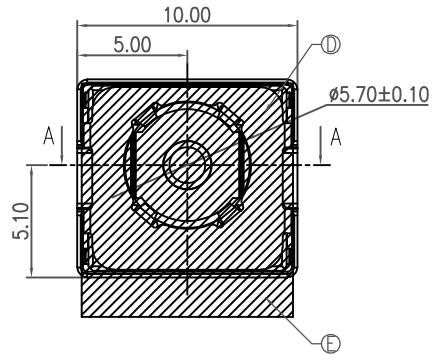

MATING PLUG
DP550170-0192-60000H

SPECIFICATION:

1. RATING: DC 20V 18A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES



E	MYLAR			1			
D	GROUND	SUS 304		1			
C	SHELL	C5210	Ni 40u"MIN.	1			
B	CENTER PIN	C2680	GOLD FLASH/Ni 40u" MIN.	1			
A	HOUSING	PA10T	BLACK	1			
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY			
UNLESS OTHERWISE SPECIFIED TOLERANCES		XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
DECIMALS:		ANGLES:		DESIGN: GAO. PENG 2022.5.12			
DIM	TOL	DIM	TOL				
X.	±0.50	X.	±2°				
X.X	±0.30	X.X	±1°				
X.XX	±0.20	X.XX					
X.XXX	±0.10	X.XXX		PART NAME: Φ5.5 立式(H=11.6) DC POWER JACK PART NO. XB-DC-550170-1122 SHEET: 1/1 REV.: A1 DRAWING NO			
3RD ANGLE PROJECTION		UNIT: mm					
4		3		2		1	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------