

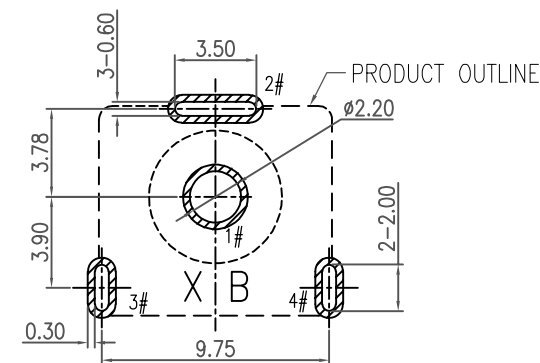
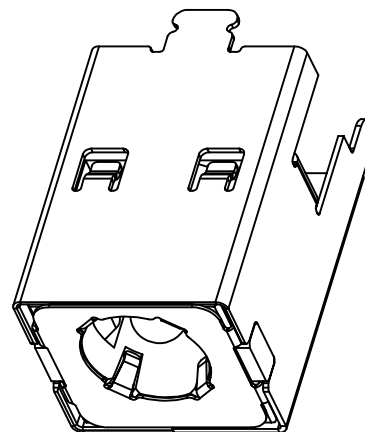
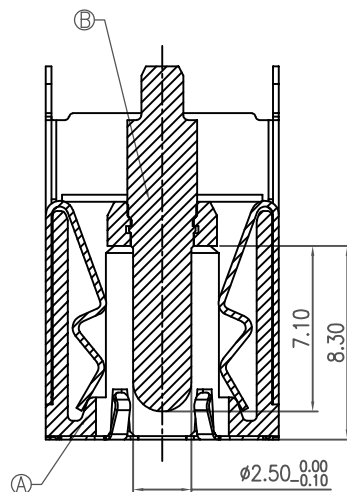
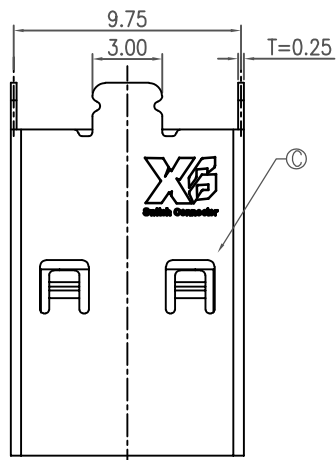
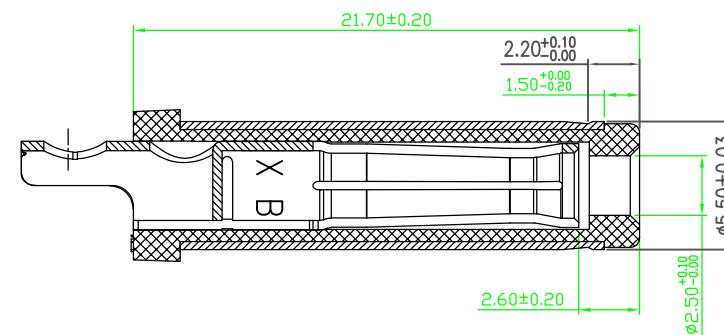


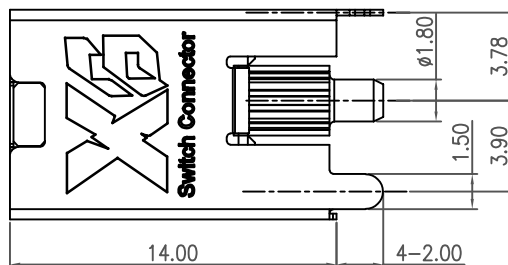


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

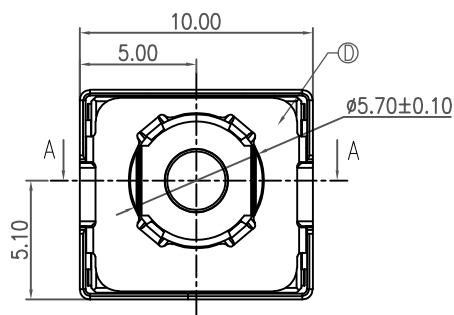

MATING PLUG
XB-DP550250-0188

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES



E	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY



UNLESS OTHERWISE
SPECIFIED TOLERANCES

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	GAO. PENG 2023.3.28	PART NAME: Φ5.5 立式(H=14.0) DC POWER JACK
DIM	TOL	DIM	TOL	CHECK:		PART NO. XB-DC-550250-1393
X.	±0.50	X.	±2°			SHEET: 1/1 REV.: A1 DRAWING NO
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX				
X.XXX	±0.10	X.XXX		APPROVED	HE. LONG. FEI 2023.3.28	
3RD ANGLE PROJECTION		UNIT: mm				


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

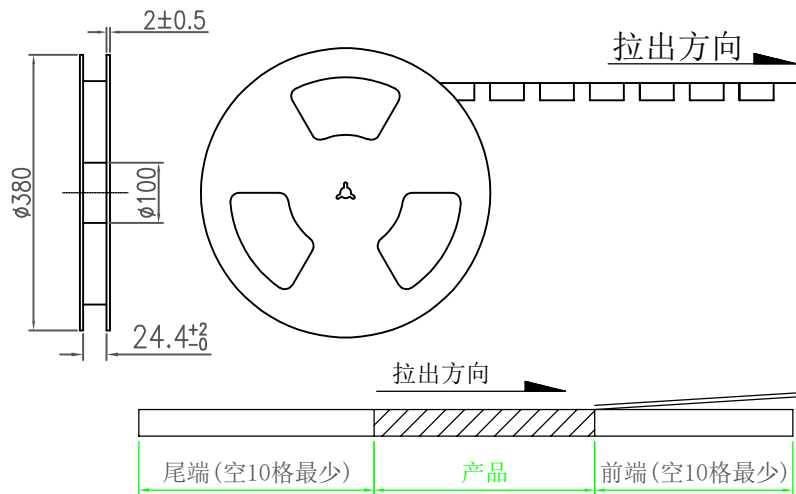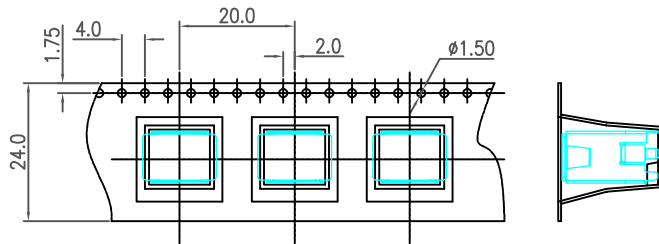

备注:



- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=385, W=385, H=380$
- 包装数量:
250PCS/卷, 10卷(2500PCS)/箱
- 上盖带剥离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
剥离角度: $165^\circ\sim 180^\circ$;
剥离速度: 300mm/分钟 .



包装盘标签


总共10层

PE袋:



外箱, 1PCS

透明胶带



UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:		ANGLES:		DESIGN:	GAO. PENG 2023.4.15
DIM	TOL	DIM	TOL	CHECK:	PART NAME: DC POWER JACK 包装图
X.	±0.50	X.	±2°		
X.X	±0.30	X.X	±1°		
X.XX	±0.20	X.XX	—		
X.XXX	±0.10	X.XXX	—	APPROVED	HE. LONG. FEI 2023.4.15
3RD ANGLE PROJECTION				UNIT: mm	PART NO. XB-DC-550250-1393
					SHEET: 1/1 REV.: A1
					DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------