

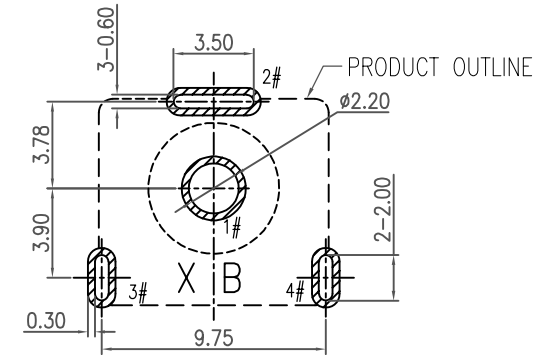
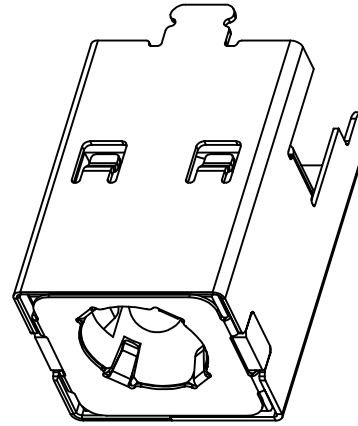
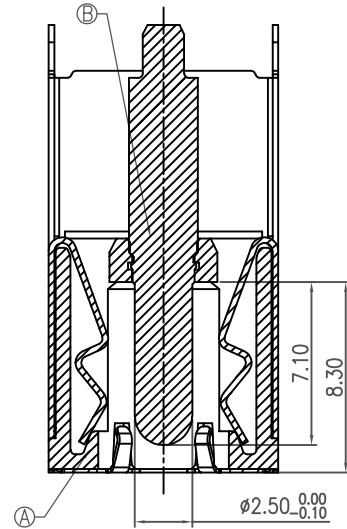
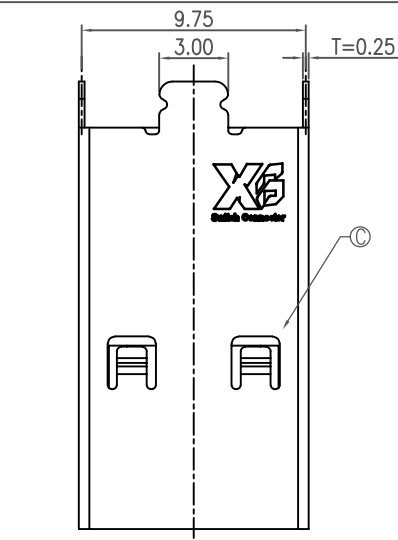
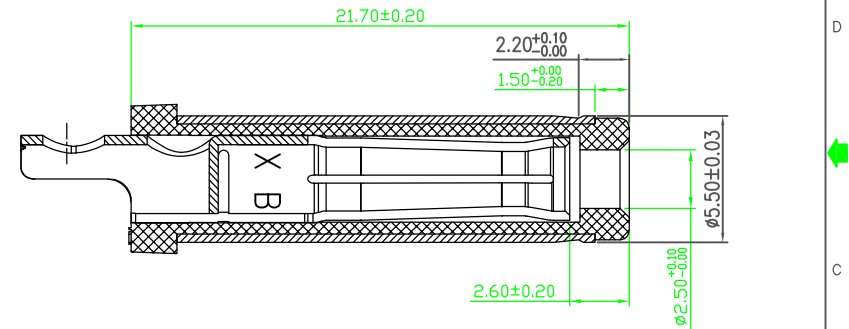


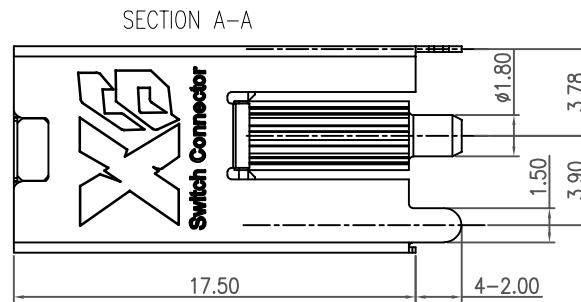


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ± 0.05

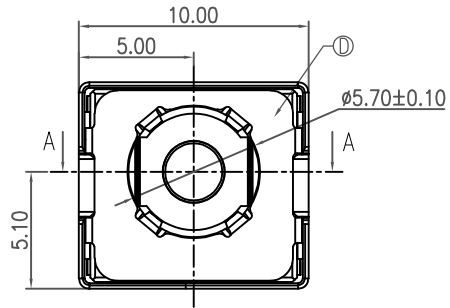

MATING PLUG
DP550250-0188-60000H

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30m Ω MAX.(INITIAL)
50m Ω MAX.(FINAL)
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES




NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
E	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DECIMALS:		ANGLES:		DESIGN:	GAO. PENG	PART NAME: Φ5.5 立式(H=17.5) DC POWER JACK
DIM	TOL	DIM	TOL		2023.3.28	
X.	±0.50	X.	±2°	CHECK:		PART NO. XB-DC-550250-1396
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX	—	APPROVED	HE. LONG. FEI	SHEET: 1/1 REV.: A1
X.XXX	±0.10	X.XXX	—		2023.3.28	
		UNIT: mm		DRAWING NO		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

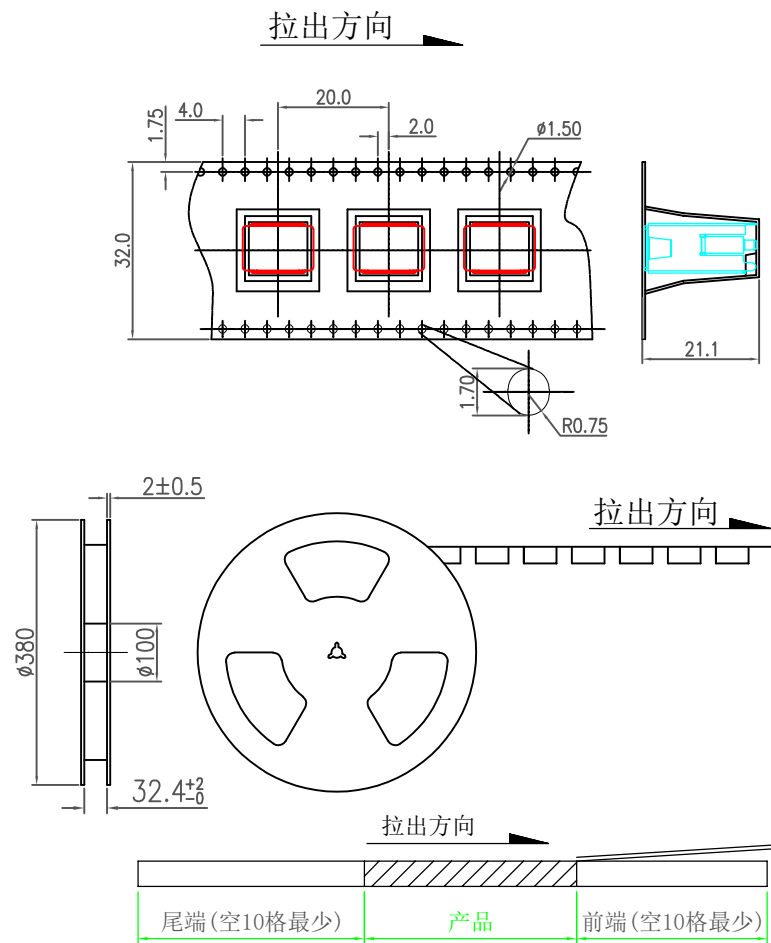

备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=385, W=385, H=380$
- 包装数量:
200PCS/卷, 10卷(2000PCS)/箱
- 上盖带拨离力: $0.1\text{N}\sim 0.7\text{N}(10\sim 70\text{gf})$;
拨离角度: $165^\circ\sim 180^\circ$;
拨离速度: 300mm/分钟 .



总共10层

PE袋:

外箱, 1PCS

透明胶带

UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	± 0.50	X.	$\pm 2^\circ$
X.X	± 0.30	X.X	$\pm 1^\circ$
X.XX	± 0.20	X.XX	$\pm 0.5^\circ$
X.XXX	± 0.10	X.XXX	$\pm 0.2^\circ$

3RD ANGLE PROJECTION

DESIGN: GAO. PENG
2023.8.15
CHECK:
APPROVED: HE. LONG. FEI
2023.8.15

UNIT: mm

PART NAME:
DC POWER JACK
包装图
PART NO.
XB-DC-550250-1396
SHEET: 1/1 REV.: A1
DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

8

7

6

5

4

3

2

1