

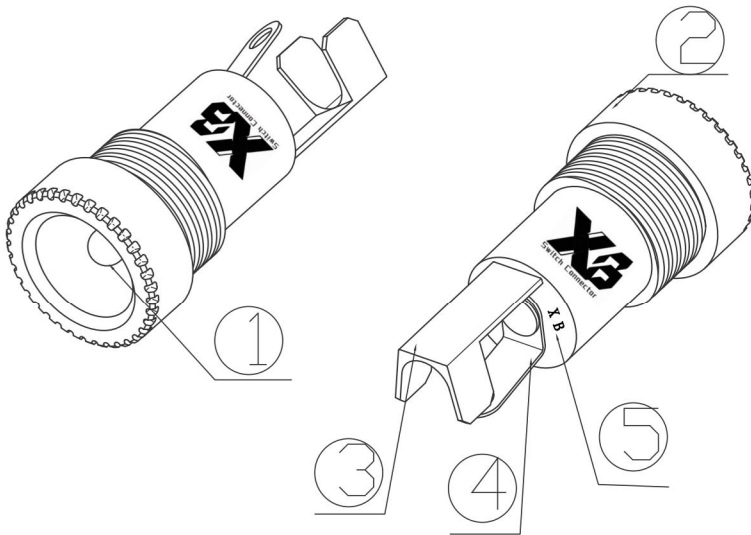
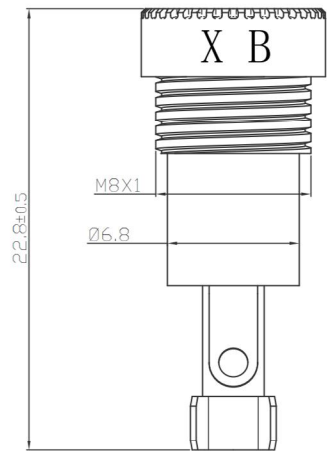
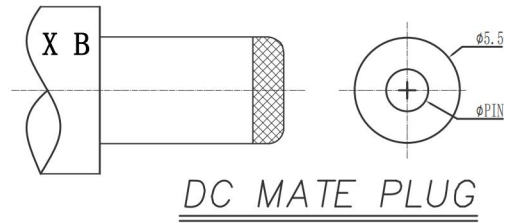
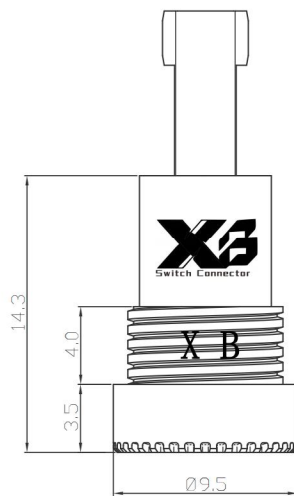
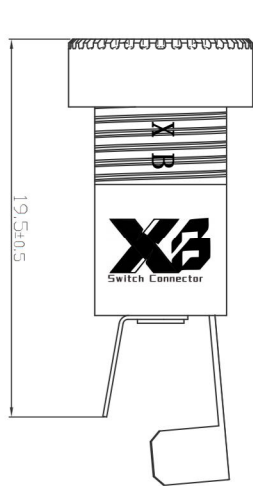




SCHEMATIC



PIN	φ 2.0	φ 2.5
APPD		

SPECIFICATION

- 1.Rating : DC 12V 30V , 3.0A 5.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

5	XB-DC-9514-5	塑料座	1PCS	PPT	白色
4	XB-DC-9514-4	4号脚	1PCS	H59-3黄铜	镀银
3	XB-DC-9514-3	3号脚	1PCS	C5191磷铜=0.35	镀银
2	XB-DC-9514-2	铜套	1PCS	H59-3黄铜棒	镀锡
1	XB-DC-9514-1	PIN	1PCS	H59-3黄铜棒	镀锡
序号	零件图代号	名称	数量	材料	镀层/颜色



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB DC Power Jack

MODEL : XB-DC-9514



UNIT : MM	DWN.	ZENQ. CHEN	DATE		TOLERANCE	ANGLE TOL
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE		$\leq 1.5\text{mm} \pm 0.1$	$\pm 2^\circ$
VERSION	01	APPD.	FET. LONG. HE	DATE	$> 1.5\text{mm} \pm 0.2$	
					$\geq 10.0\text{mm} \pm 0.3$	

6	PIN	BRASS	1	Ni PLATED
5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED
4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED
3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED
2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED
1	HOUSING	PBT UL94-V0	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING