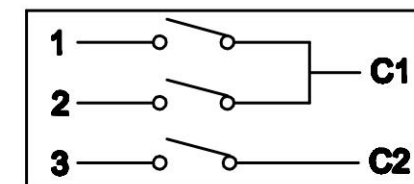


ROHS








电流电路
CURRENT CIRCUIT

CIRCUIT:011

位置POSITION	电路CIRCUIT
1(INITIAL)起始	OFF
2	C1+1
3	C1+1+2
4	C1+1+2,C2+3

线路图
CIRCUIT DIAGRAM

- 滑动开关型号 SLIDE SWITCH MODEL:KND-2-3BP011-R3
- 焊线端子 SOLDER CONNECTOR TYPE;
单刀四掷, 多回路 SINGLE POLE FOUR THROW, MULTI-CIRCUIT
- 额定值 RATING: 16(4)A 125/250VAC μ T105 (UL,KC)
10(2)A 125/250VAC μ T85 (UL,KC,CQC,ENEC17,NEMKO)
10A 250VAC μ T85 (CE)
7(2)A 250VAC μ T85 (UL,CQC,ENEC17;NEMKO)
5(1)A 250VAC μ T85 (UL,CQC,ENEC17;NEMKO)
- 接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
- 绝缘电阻 INSULATION RESISTANCE: $\geq 100\text{M}\Omega$ (DC500V/1MIN)
- 介电强度 DIELECTRIC STRENGTH: 1500V /0.5mA /1MIN
- 机械寿命 MECHANICAL LIFE: >50000 CYCLES
- 电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX350°C, 3S
- 操作力 OPERATION FORCE:550 $\pm$ 200gf
- 所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

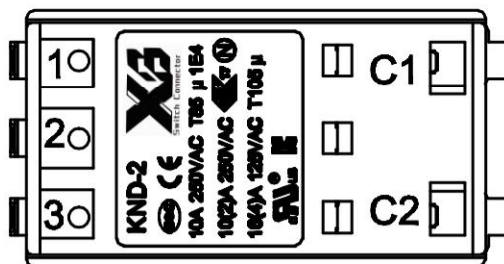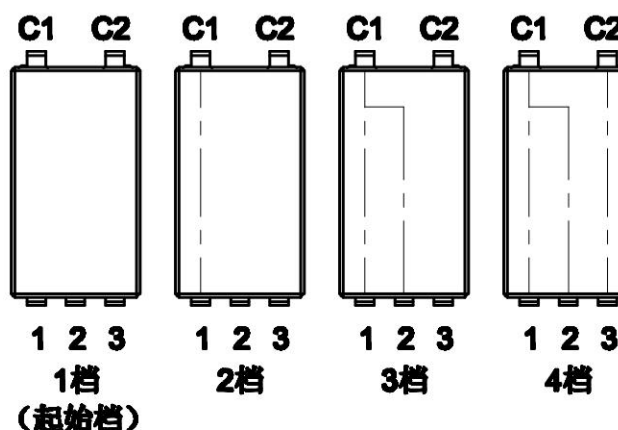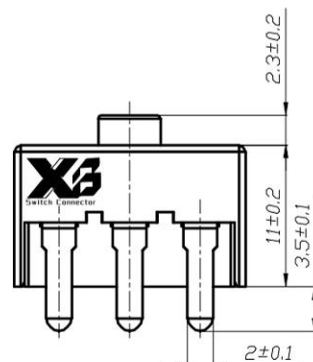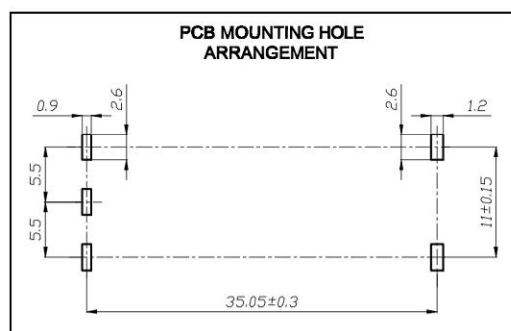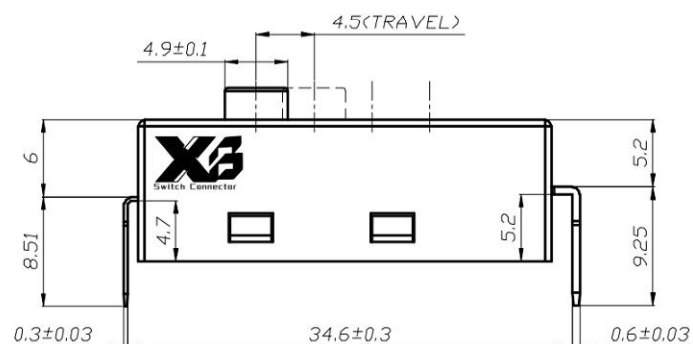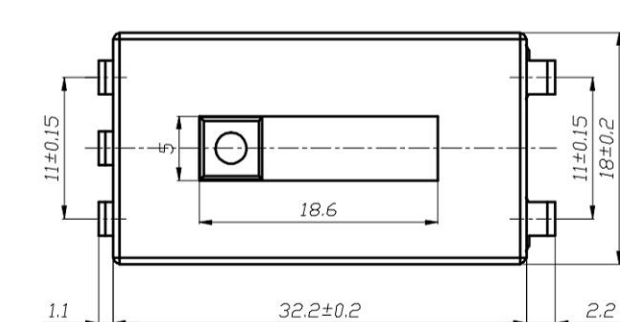


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-KND-2-3BP011-R3大电流开关4位16A 4档拨动开关10A

TOLERANCE
<=1.5mm $\pm$ 0.1
> 1.5mm $\pm$ 0.2
>=10mm $\pm$ 0.3ANGLE
 $\pm 2^\circ$

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING