
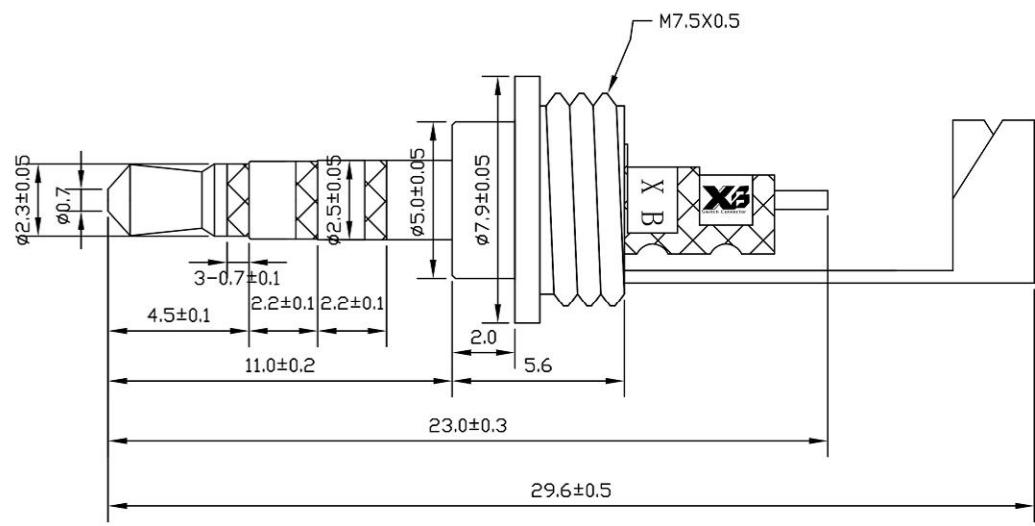


ROHS

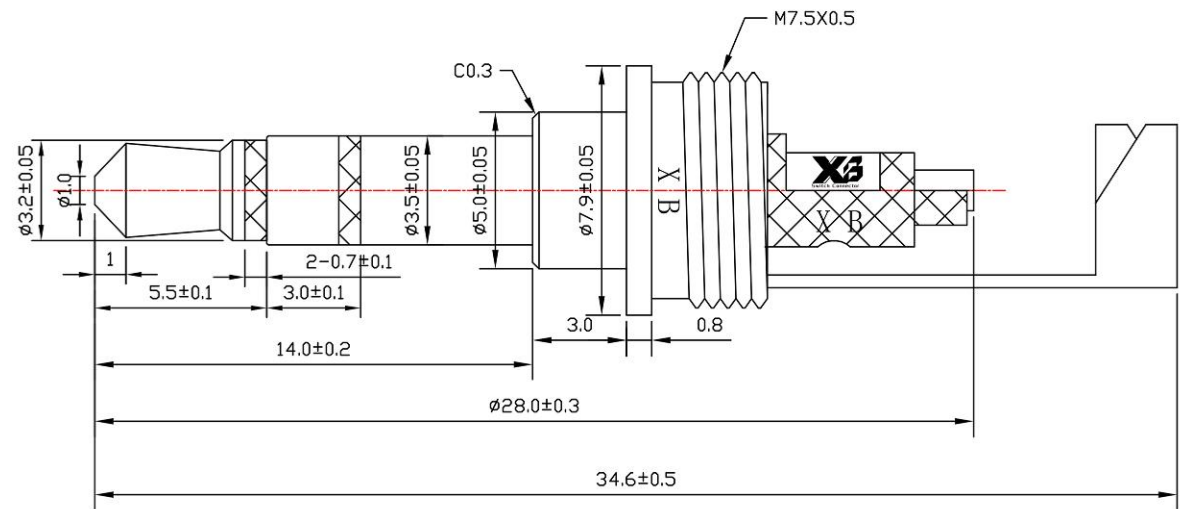

- SPECIFICATION
- 1.Rating : DC 30V 0.5A ; 1.0A ;
 - 2.Contact resistance : ≤ 30mΩ ;
 - 3.Insulation resistance : ≥ 100MΩ ;
 - 4.Withstand voltage : 500VAC ;
 - 5.Insertion and extraction force : 3-20N
 - 6.life test : 5,000 cycles °

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD												
TITLE : XB Audio Plug		MODEL : XB-P2504X29 2.5 四节 焊线式					TOLERANCE <=1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3		ANGLE TOL ± 2°					
UNIT : MM	DWN.	ZENQ. CHEN	DATE											
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE											
VERSION	01	APPD.	FEI. LONG. HE	DATE										