


ROHS

SPECIFICATION

1. Rating : DC 30V 0.5A ; 1.0A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles °

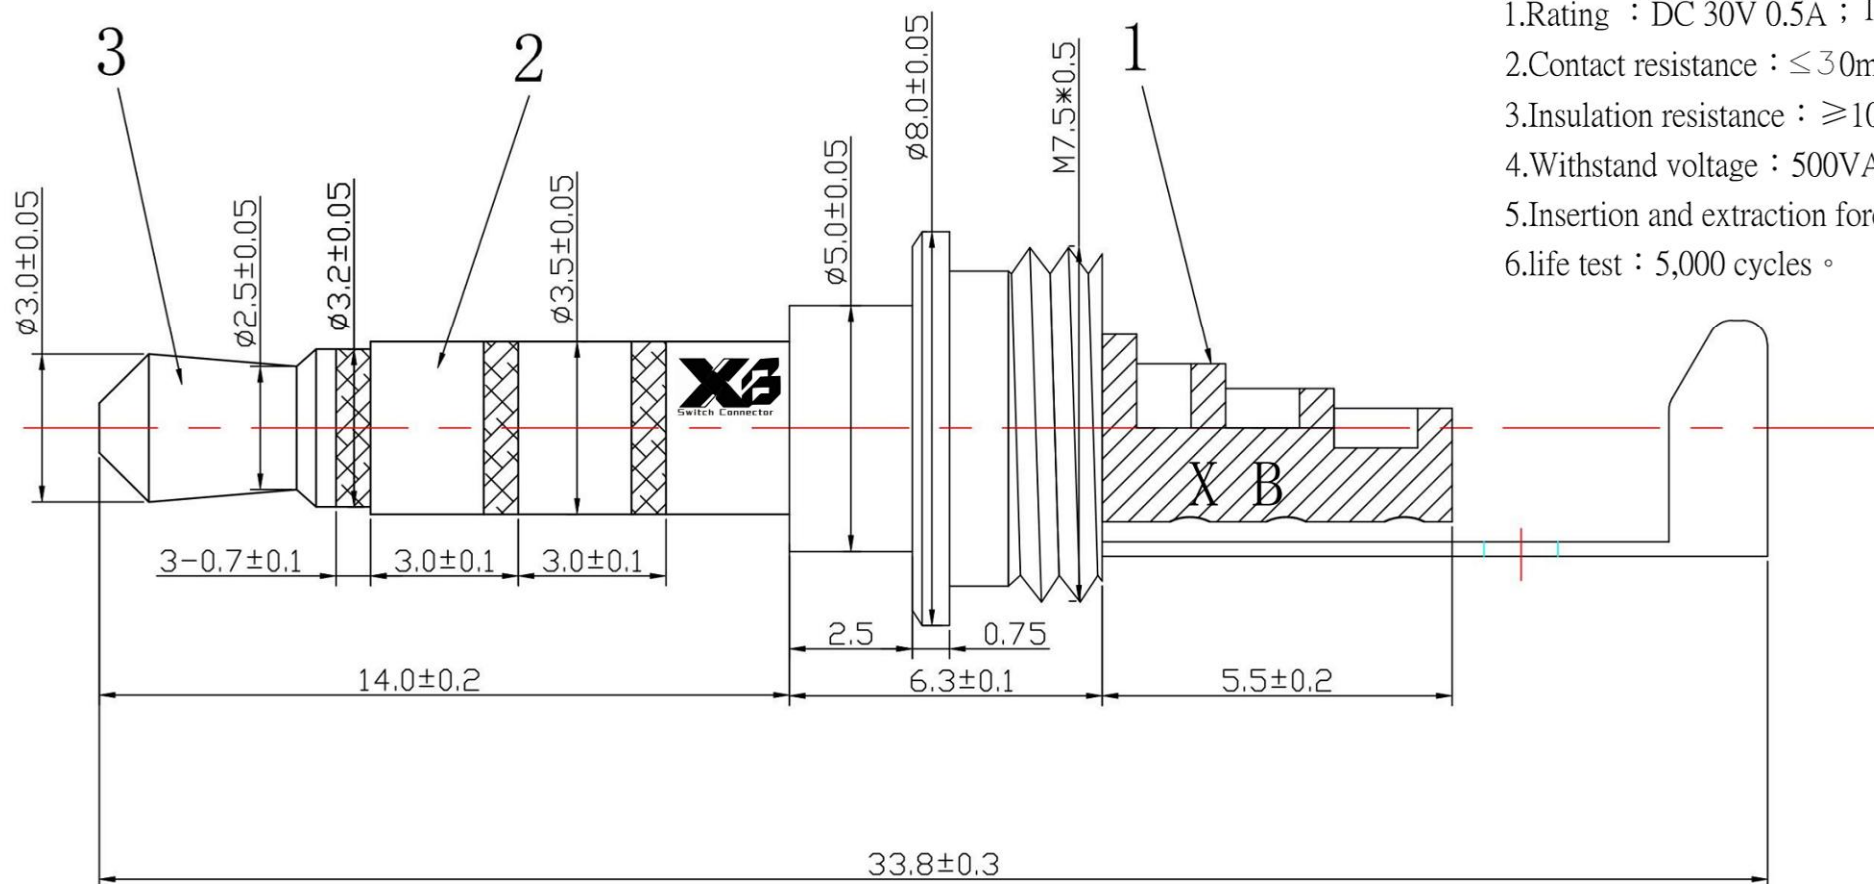


序号	名称 The name of the	材质The material	处理 To deal with
①	胶料	POM	BK
②	铜材	黄铜(brass)	NI/AU
③	电镀	黄铜(brass)	NI/AU



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE :	XB Audio Plug
MODEL :	XB-P3504L33 3.5四节



UNIT : MM		DWN.	ZENQ. CHEN	DATE	TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3	ANGLE TOL ± 2°						
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE			2	TERMINAL	PBS STRIP	5	Ag PLATED	
VERSION		01	APPD.	FEI. LONG. HE			DATE	1	HOUSING	PBT	1	BLACK
								NO.	PART NAME	MATERIAL	QTY.	FINISHING