


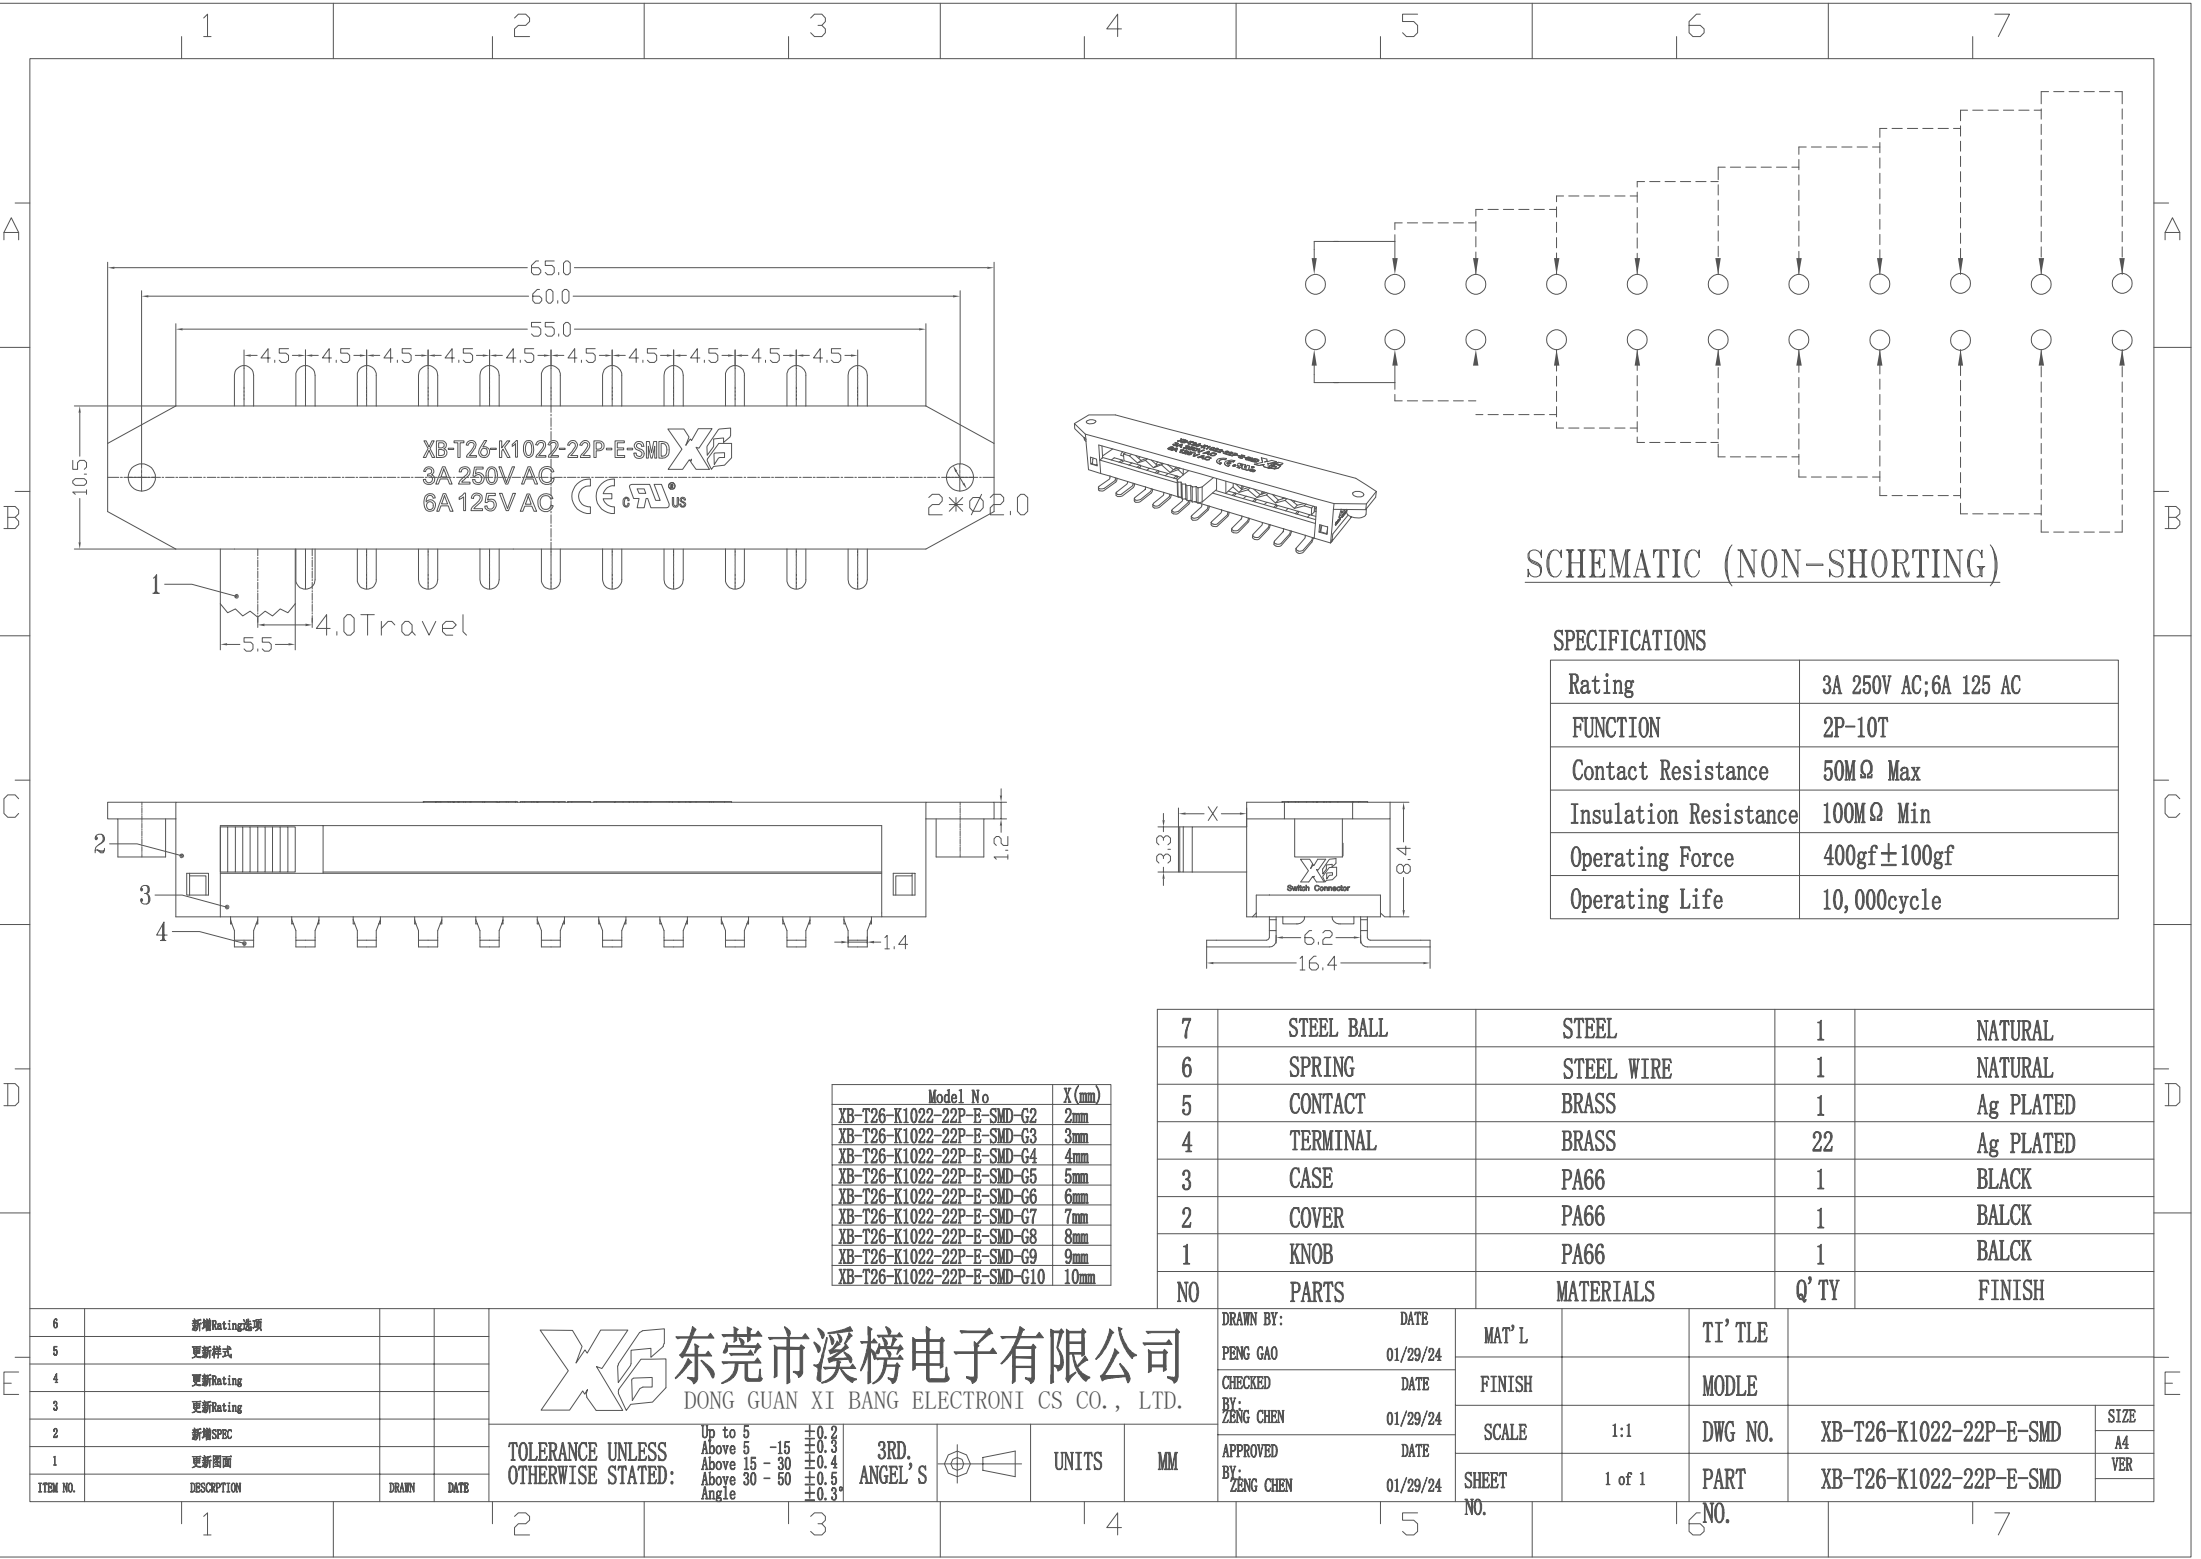

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	3A 250V AC;6A 125 AC
FUNCTION	2P-10T
Contact Resistance	50MΩ Max
Insulation Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	22	Ag PLATED
3	CASE	PA66	1	BLACK
2	COVER	PA66	1	BALCK
1	KNOB	PA66	1	BALCK
NO	PARTS	MATERIALS	Q' TY	FINISH

6	新增Rating选项		
5	更新样式		
4	更新Rating		
3	更新Rating		
2	新增SPEC		
1	更新封面		
ITEM NO.	DESCRIPTION	DRAWN	DATE

XBG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 Above 5 - 15 Above 15 - 30 Above 30 - 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD ANGEL'S	UNITS	MM
------------------------------------	--	---------------------------------------	----------------	-------	----

DRAWN BY: PENG GAO	DATE 01/29/24	MAT'L	TI'TLE
CHECKED BY: ZENG CHEN	DATE 01/29/24	FINISH	MODLE
APPROVED BY: ZENG CHEN	DATE 01/29/24	SCALE 1:1	DWG NO. XB-T26-K1022-22P-E-SMD
		SHEET NO. 1 of 1	PART NO. XB-T26-K1022-22P-E-SMD
			SIZE A4
			VER