
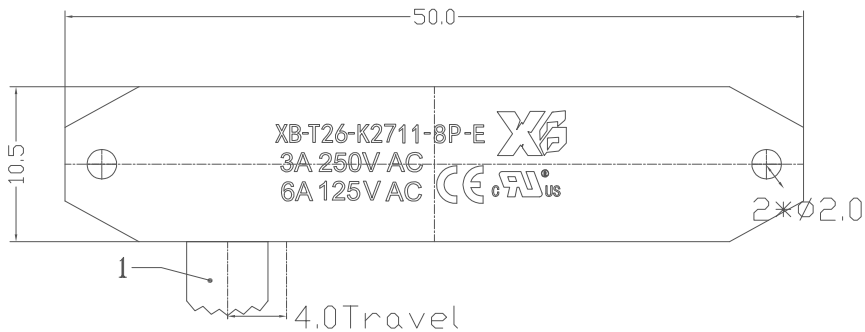



SCHEMATIC (NON-SHORTING)

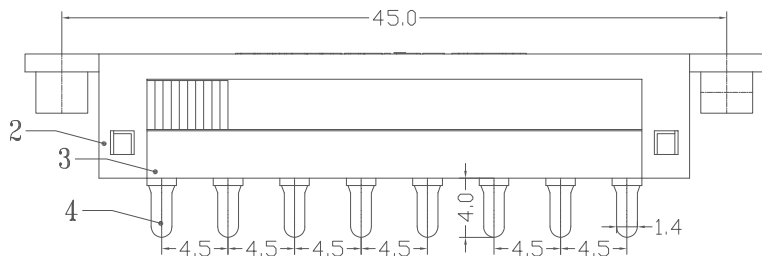

SPECIFICATIONS

Rating	3A 250V AC;6A 125 AC
FUNCTION	1P-7T
Contact Resistance	50MΩ Max
Insulation Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

Model No	X (mm)
XB-T26-K2711-8P-E-G2	2mm
XB-T26-K2711-8P-E-G3	3mm
XB-T26-K2711-8P-E-G4	4mm
XB-T26-K2711-8P-E-G5	5mm
XB-T26-K2711-8P-E-G6	6mm
XB-T26-K2711-8P-E-G7	7mm
XB-T26-K2711-8P-E-G8	8mm
XB-T26-K2711-8P-E-G9	9mm
XB-T26-K2711-8P-E-G10	10mm

7	STEEL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag
4	TERMINAL	BRASS	8	PLATED
3	CASE	PA66	1	BLACED
2	COVER	PA66	1	BALCK
1	KNOB	PA66	1	BALCK
NO	PARTS	MATERIALS	Q' TY	FINISH

6	新增Rating选项		
5	更新样式		
4	更新Rating		
3	更新Rating		
2	新增SPEC		
1	更新图面		
ITEM NO.	DESCRIPTION	DRAWN	DATE

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE
UNLESS
STATED:

Up to 5 +0.2
Above 5 -15 ±0.3
Above 15 ±0.4
Above 30 ±0.5
Above 80 ±0.6

3RD
ANGEL'S



UNITS

MM

DRAWN BY: PENG GAO
CHECKED BY: ZENG CHEN
APPROVED BY: ZENG CHEN
DATE: 01/29/24

MAT'L		TI'TLE	
FINISH		MODLE	
SCALE	1:1	DWG NO.	XB-T26-K2711-8P-E
SHEET NO.	1 of 1	PART	XB-T26-K2711-8P-E
		NO.	
		SIZE	A4
		VER	