

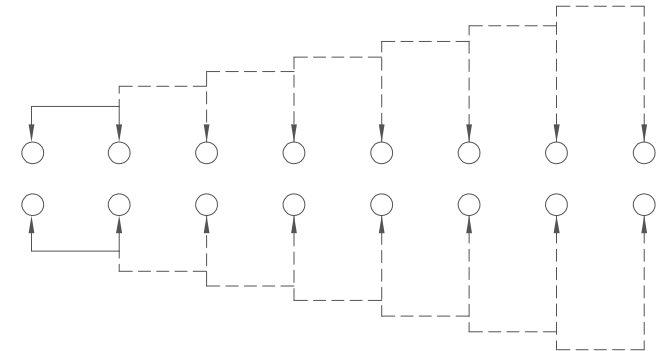

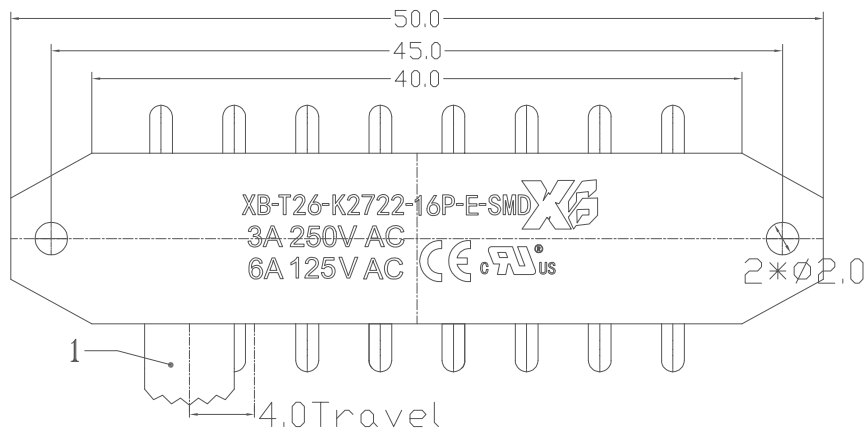


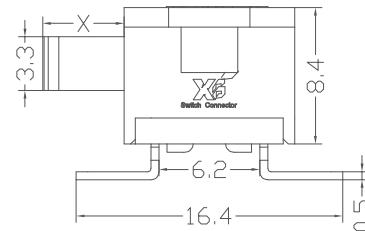

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	3A 250V AC;6A 125 AC
FUNCTION	2P-7T
Contact	50MΩ Max
Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

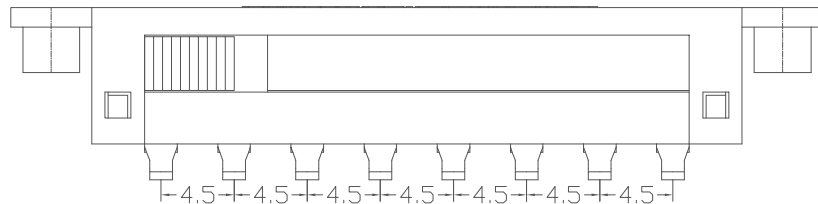

Model No	X (mm)
XB-T26-K2722-16P-E-SMD-G2	2mm
XB-T26-K2722-16P-E-SMD-G3	3mm
XB-T26-K2722-16P-E-SMD-G4	4mm
XB-T26-K2722-16P-E-SMD-G5	5mm
XB-T26-K2722-16P-E-SMD-G6	6mm
XB-T26-K2722-16P-E-SMD-G7	7mm
XB-T26-K2722-16P-E-SMD-G8	8mm
XB-T26-K2722-16P-E-SMD-G9	9mm
XB-T26-K2722-16P-E-SMD-G10	10mm

7	STEEL	STEEL	1	NATURAL
6	SPRING	STEEL	1	NATURAL
5	CONTACT	BRASS	1	Ag
4	TERMINAL	BRASS	16	PLATED
3	CASE	PA66	1	BLACK
2	COVER	PA66	1	BLACK
1	KNOB	PA66	1	BLACK
NO	PARTS	MATERIALS	Q' TY	FINISH

6	新增Rating选项		
5	更新样式		
4	更新Rating		
3	更新Rating		
2	新增SPEC		
1	更新图面		
ITEM NO.	DESCRIPTION	DRAWN	DATE

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE
UNLESS
STATED:

Up to 5 ±0.2
Above 5 -15 ±0.3
Above 15 ±0.4
Above 30 ±0.5
Above 80 ±0.8

3RD
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TI'TLE	SIZE
PENG GAO	01/29/24			A4
CHECKED BY:	DATE	FINISH	MODLE	VER
ZENG CHEN	01/29/24			
APPROVED BY:	DATE	SCALE	DWG NO.	
ZENG CHEN	01/29/24	1:1	XB-T26-K2722-16P-E-SMD	
		SHEET NO.	PART NO.	
		1 of 1	XB-T26-K2722-16P-E-SMD	