

A

B

C

D

E




A

B



C

D

E

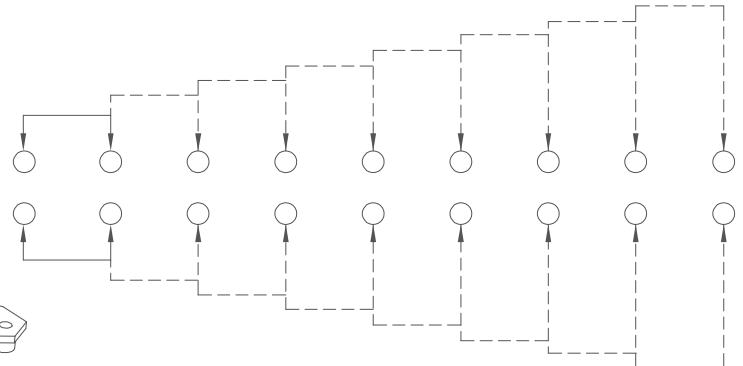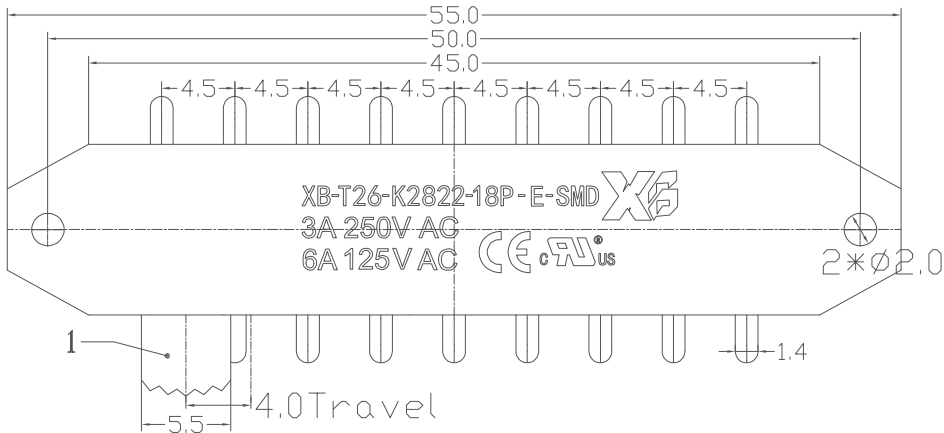

SCHEMATIC (NON-SHORTING)

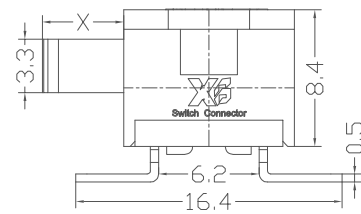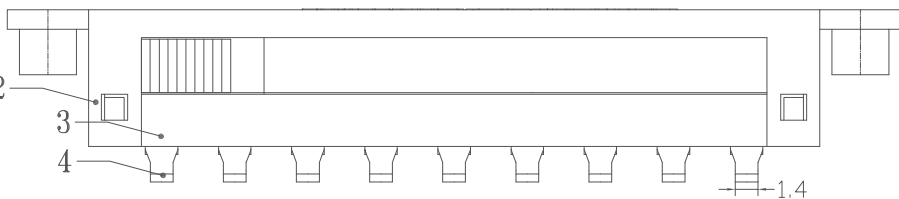

SPECIFICATIONS

Rating	3A 250V AC;6A 125 AC
FUNCTION	2P-8T
Contact Resistance	50MΩ Max
Insulation Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

Model No	X (mm)
XB-T26-K2822-18P-E-SMD-G2	2mm
XB-T26-K2822-18P-E-SMD-G3	3mm
XB-T26-K2822-18P-E-SMD-G4	4mm
XB-T26-K2822-18P-E-SMD-G5	5mm
XB-T26-K2822-18P-E-SMD-G6	6mm
XB-T26-K2822-18P-E-SMD-G7	7mm
XB-T26-K2822-18P-E-SMD-G8	8mm
XB-T26-K2822-18P-E-SMD-G9	9mm
XB-T26-K2822-18P-E-SMD-G10	10mm

7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	18	Ag PLATED
3	CASE	PA66	1	BLACK
2	COVER	PA66	1	BALCK
1	KNOB	PA66	1	BALCK
NO	PARTS	MATERIALS	Q' TY	FINISH

6	新增Rating选项		
5	更新样式		
4	更新Rating		
3	更新Rating		
2	新增SPEC		
1	更新图面		
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5	±0.2
Above 5	±0.3
Above 15	±0.4
Above 30	±0.5
Above 50	±0.6
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TI'TLE
PENG GAO	01/29/24		
CHECKED BY:	DATE	FINISH	MODLE
ZENG CHEN	01/29/24		
APPROVED BY:	DATE	SCALE	DWG NO.
ZENG CHEN	01/29/24	1:1	XB-T26-K2822-18P-E-SMD
		SHEET NO.	PART NO.
		1 of 1	XB-T26-K2822-18P-E-SMD
			SIZE
			A4
			VER