
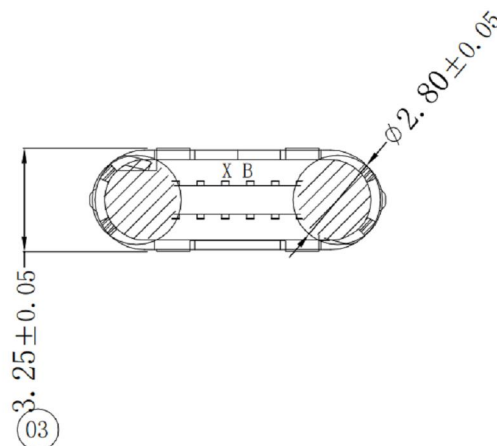
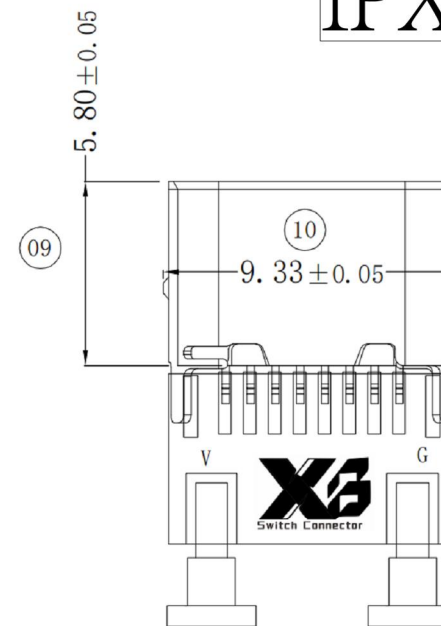
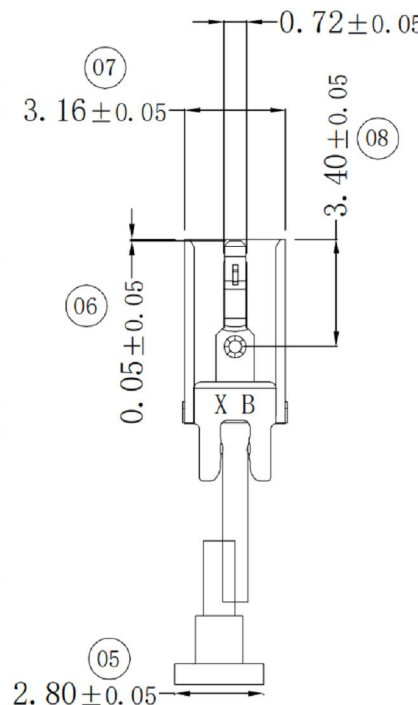



IPX7

ROHS

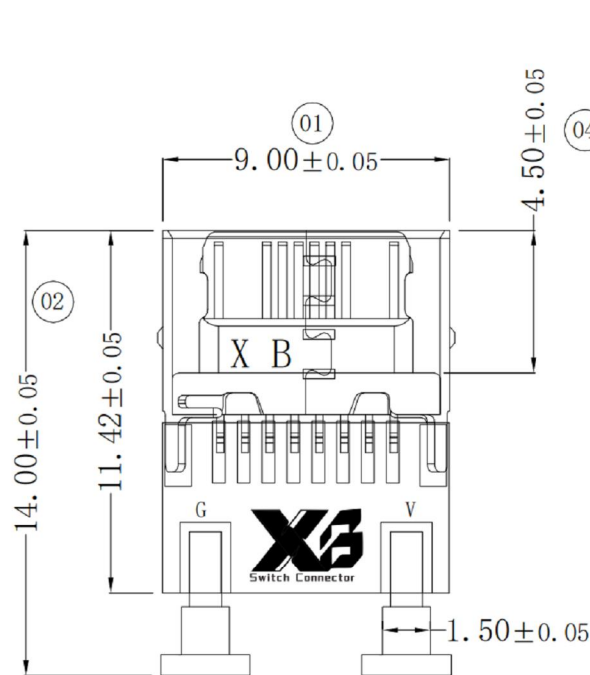

|    |    |    |    |    |    |     |    |     |
|----|----|----|----|----|----|-----|----|-----|
| 焊盘 | V  |    |    |    | G  |     |    |     |
| 针位 | A4 | A9 | B4 | B9 | A1 | A12 | B1 | B12 |
| 备注 |    |    |    |    |    |     |    |     |

接点定义放大图 (16P)

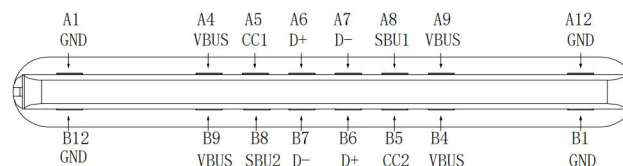

- 电气测试:
  - 1接触抗阻: 30mΩ MAX, 寿命后变化±10mΩ
  - 2耐电压: 100V AC
  - 3绝缘阻抗: 1000MΩ MIN
  - 4额定电流 5A
- 机械测试
  - 1耐久测试: 10000次;
  - 2插入力: 20N Max;
  - 3拔出力: 8N Min;
- 包装:
  - 1 PE袋包装, 最小包装量1000PCS
- 环境
  - 1工作温度: -55℃~+88℃

TYPE-C2P 注塑防水2芯T型柱

**东莞市溪榜电子有限公司**  
DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: ZENQ. CHEN  
CHECKED BY: DONG. PANG  
APPROVED BY: FEI. LONG. HE  
DATE: 03/07/23  
DATE: 03/07/23  
DATE: 03/07/23

|           |        |          |                           |
|-----------|--------|----------|---------------------------|
| MAT'L     |        | TITLE    | CONNECTOR                 |
| FINISH    |        | MODLE    | USB TYPE CF               |
| SCALE     | 1 : 1  | DWG NO.  | USB C TYPE 2.0 Female 防水型 |
| SHEET NO. | 1 of 1 | PART NO. | XB-TYPEC-027B-H140-2P     |

| ITEM NO. | DESCRIPTION | DRAWN | DATE | SIZE | VER |
|----------|-------------|-------|------|------|-----|
|          |             |       |      | A4   | R   |