

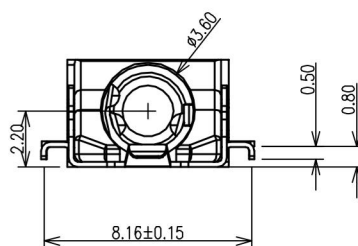
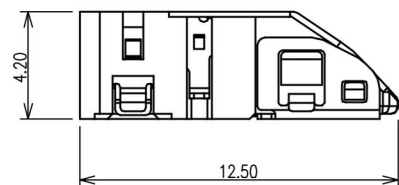
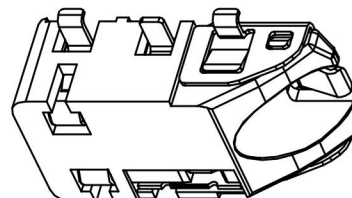
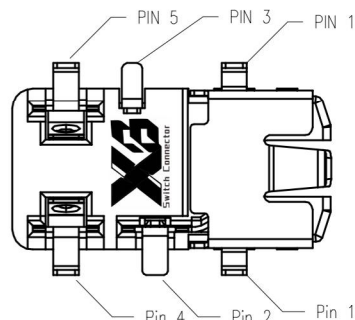


ROHS

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE			2012/05/25
B		4#5#端子改SUS304材质			2019/05/04
C		塑胶主体改为无LOGO			2019/09/12

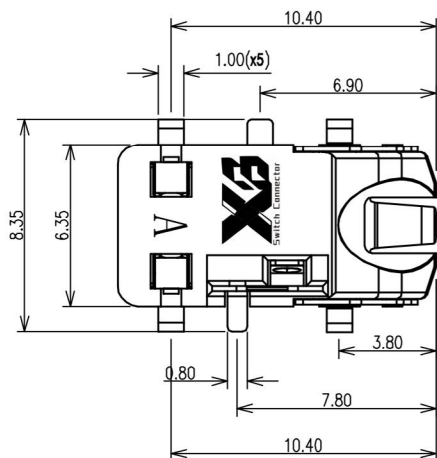


- NOTES :
- 1.0) RATING :
- 1.1. VOLTAGE : 12 VDC (R.M.S.)
- 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
- 1.3. TEMPERATURE : -25°C TO +85°C
- 2.0) ELECTRICAL CHARACTERISTIC
- 2.1. CONTACT RESISTANCE : INITIAL 50mΩ MAX. AFTER 100mΩ
- 2.2. INSULATION RESISTANCE : 100 MΩ MIN.
- 2.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
- 3.0) MECHANICAL :
- 3.1. DURABILITY ,MINUM: MATED 5000 CYCLES WITHOUT DEGRADING ELECTRICAL
- 3.2. INITIAL:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g
- 3.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g

PRODUCT NO.
XB-PJ-27-06AB03-02
① ② ③ ④
① PRODUCT SERIES:
PJ27: PHONE JACK CONNECTOR
② PIN NO. :
06:6PIN
③ MATERIAL:
A: LCP
④ SERIES NO. :
02 沉板0.8, 前插后插有LOGO

TABLE A:

6	HOUSING	1	HIGH TEMPERATURE BLACK PA-9T
5	pin 5	1	SUS304/CONTACT AREA GOLD PLATED
4	pin 4	1	SUS304/CONTACT AREA GOLD PLATED
3	pin 3	1	phosphor bronze C5210/CONTACT AREA GOLD PLATED
2	pin 2	1	phosphor bronze C5210/CONTACT AREA GOLD PLATED
1	pin 1	1	phosphor bronze C5210/CONTACT AREA GOLD PLATED
ITEM	NAME	Q'TY	MATERIAL / FINISH

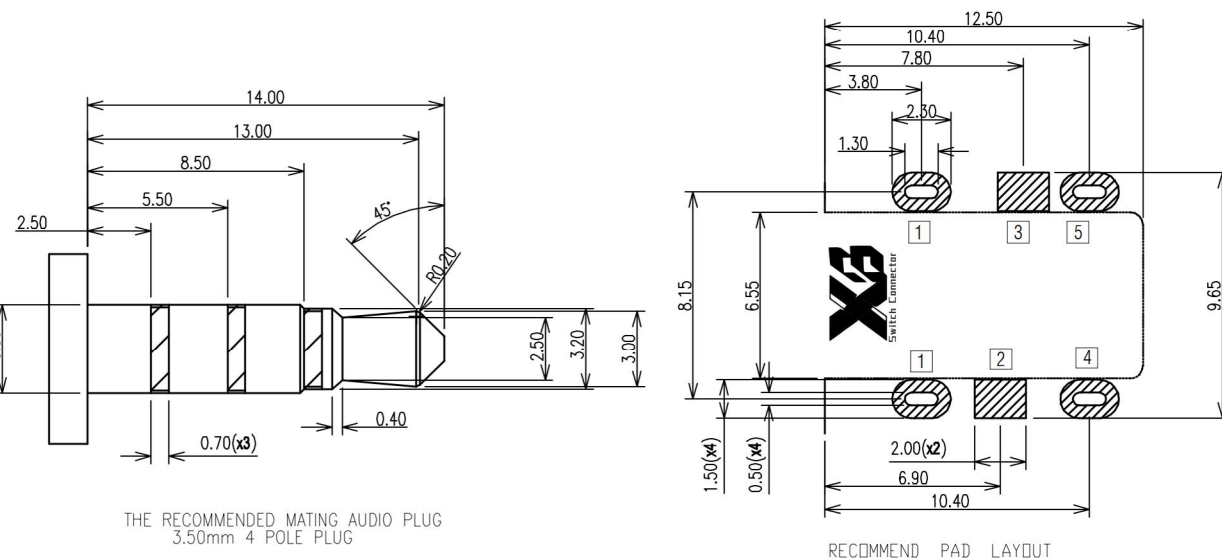

THE RECOMMENDED MATING AUDIO PLUG
3.50mm 4 POLE PLUG

RECOMMEND PAD LAYOUT

CUSTOMER DRAWING		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
GENERAL TOLERANCE	DRAWING	高鹏	TITLE: AUDIO JACK 3.5mm 斜头 沉板0.8 (前插后插) 无LOGO
.X ±0.20 .XX ±0.15 .XXX ±0.10	APPROVED	庞东	P/N: XB-PJ-27-06AB03-02
ANGEL TOLERANCE	DATE	2024. 4. 18	DRAWING NO. XB-C-PJ27-02
.X ±3° .XX ±2° .XXX ±1°	UNIT	mm	SCALE 1:1
	SIZE	A4	SHEET 1of1
	REV	C	