



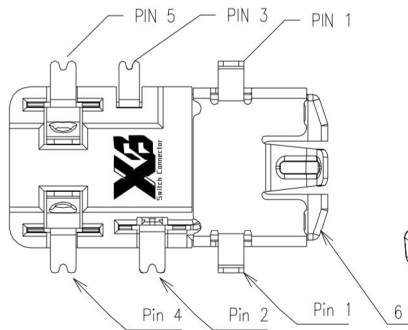


ROHS

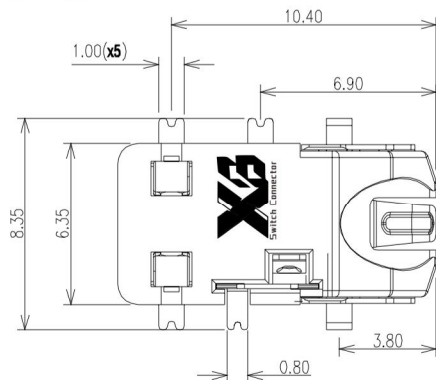

- NOTES :
- 1.0) RATING :
- 1.1. VOLTAGE : 12 VDC (R.M.S.)
- 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
- 1.3. TEMPERATURE : -25°C TO +85°C
- 2.0) ELECTRICAL CHARACTERISTIC
- 2.1. CONTACT RESISTANCE : INITIAL 50mΩ MAX. AFTER 100m
- 2.2. INSULATION RESISTANCE : 100 MΩ MIN.
- 2.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
- 3.0) MECHANICAL :
- 3.1. DURABILITY ,MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING
- ELECTRICAL
- 3.2. INITIAL:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g
- 3.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g

PRODUCT NO.

XB-PJ-27-06AB03-03

① ② ③ ④

- ① PRODUCT SERIES :
PJ27: PHONE JACK CONNECTOR
- ② PIN NO. :
06:6PIN
- ③ MATERIAL :
A: LCP
- ④ SERIES NO. :
03:板上型, 前插后贴

TABLE A:

6	HOUSING	1	HIGH TEMPERATURE BLACK PA-9T
5	pin 5	1	phosphor bronze C5210/CONTACT AREA GOLD PLATED
4	pin 4	1	phosphor bronze C5210/CONTACT AREA GOLD PLATED
3	pin 3	1	phosphor bronze C5210/CONTACT AREA GOLD PLATED
2	pin 2	1	phosphor bronze C5210/CONTACT AREA GOLD PLATED
1	pin 1	1	phosphor bronze C5210/CONTACT AREA GOLD PLATED
ITEM	NAME	Q'TY	MATERIAL / FINISH

CUSTOMER
DRAWING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE
X. ±0.20
.XX ±0.15
.XXX ±0.10

ANGEL TOLERANCE
X. ±3°
.XX ±2°
.XXX ±1°

DRAWING

高鹏

APPROVED

庞东


DATE

2024. 4. 18


TITLE: AUDIO JACK 3.5mm 斜头
板上型 (前插后贴)

P/N: XB-PJ-27-06AB03-03


DRAWING NO. XB-C-PJ27-03



UNIT mm SCALE 1:1 SIZE A4 SHEET 1of1 REV A

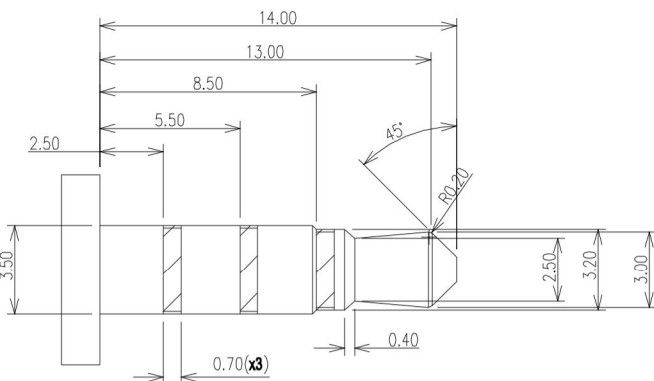

THE RECOMMENDED MATING AUDIO PLUG
3.50mm 4 POLE PLUG

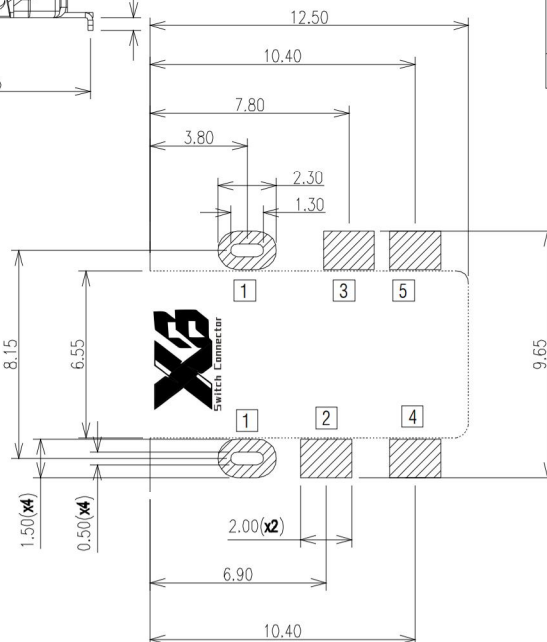

RECOMMEND PAD LAYOUT