

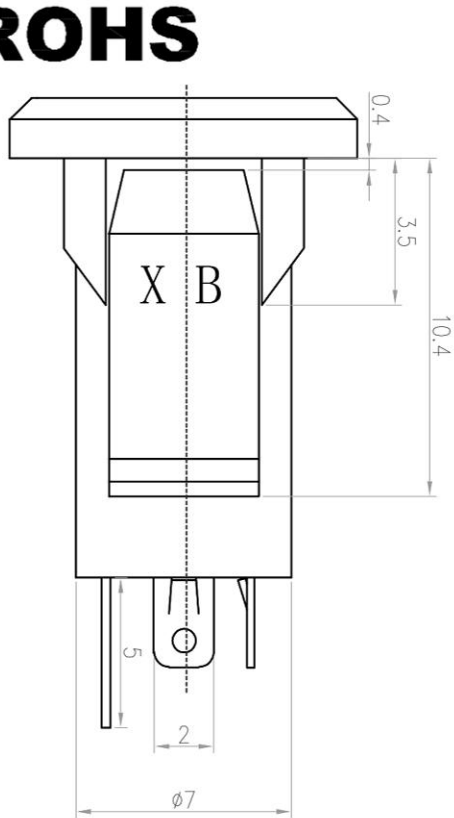
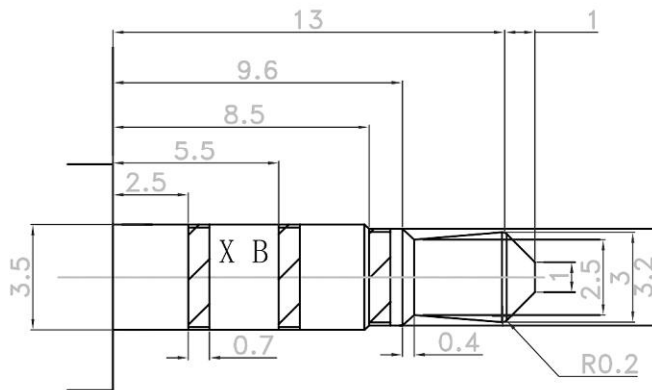



ROHS

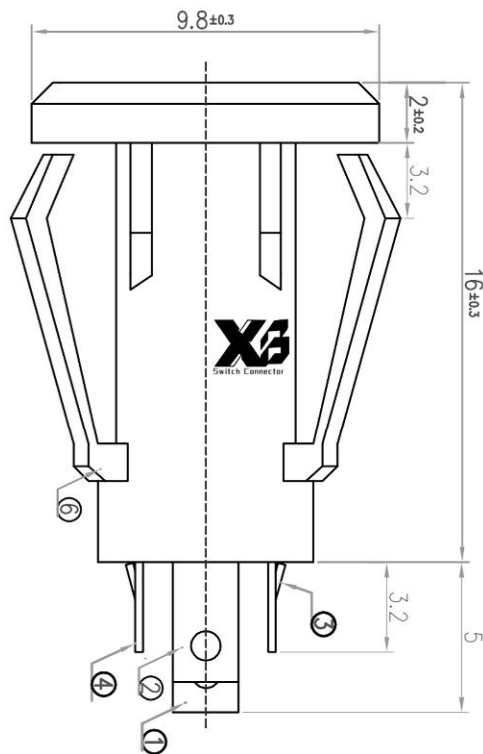


取付穴参考寸法
Mounting hole dimension

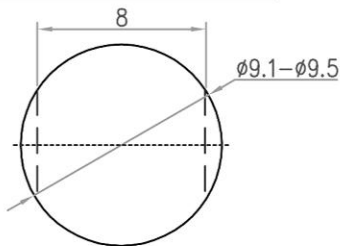



Change No. version date

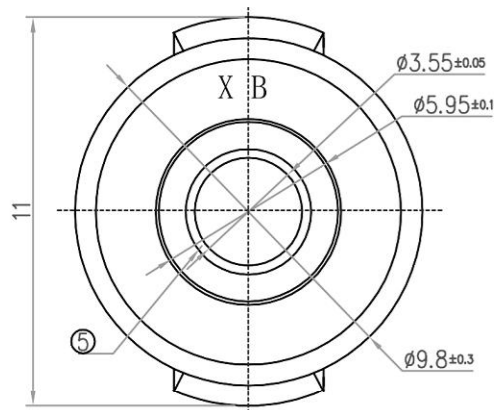

Matching Plug



CIRCUIT DIAGRAM

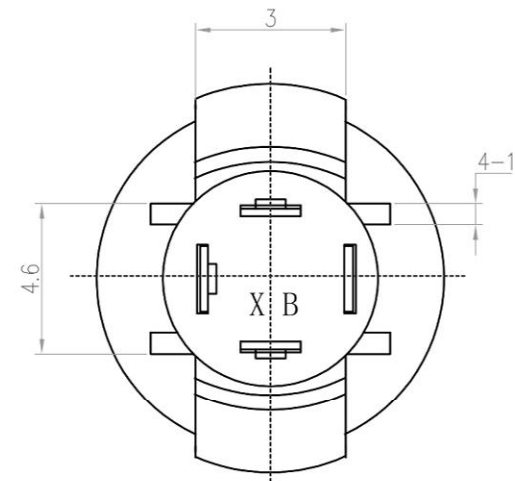

SPECIFICATION

- 1.Rating : DC 30V 0.5A ; 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles 。


6	XB-PJ-9816-4P-06	Copper sleeve	1PCS	HPb59-3	Au PlATNG	ROHS
5	XB-PJ-9816-4P-05	Pedestal	1PCS	PA66	black	ROHS
4	XB-PJ-9816-4P-04	4#-TERMINAL	1PCS	QBe2=0.25	Ag PlATNG	ROHS
3	XB-PJ-9816-4P-03	3#-TERMINAL	1PCS	QBe2=0.25	Ag PlATNG	ROHS
2	XB-PJ-9816-4P-02	2#-TERMINAL	1PCS	QBe2=0.25	Au PlATNG	ROHS
1	XB-PJ-9816-4P-01	1#-TERMINAL	1PCS	H62 C2801	Ag PlATNG	ROHS
NO.	PartDrawingCode	Name	QTY	MATERIAL	REMARK	Remarks



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB Audio jack

MODEL : XB-PJ-9816-4P 四极3.5耳机插座卡扣式4脚 安装孔9.5mm



UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE	
VERSION 01	APPD.	FEI. LONG. HE	DATE	

TOLERANCE
<=1.5mm ± 0.1
> 1.5mm ± 0.2
>=10.0mm ± 0.3

ANGLE TOL
± 2°

2	TERMINAL	PBS STRIP	5	Ag PLATED
1	HOUSING	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING