
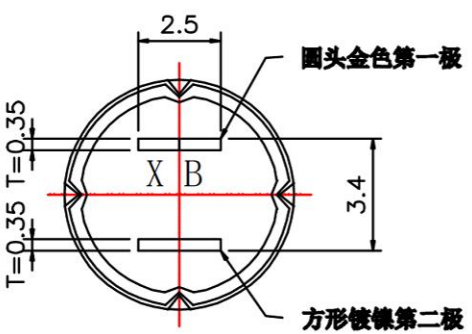
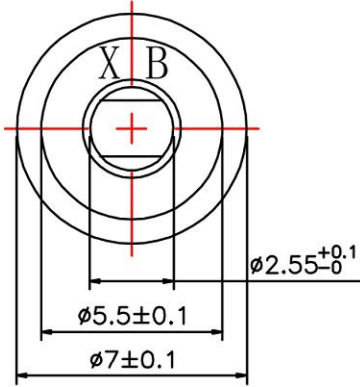


ROHS 2.5 AUDIO JACK $\phi 2.5 \times \phi 7.0 \times 19.5$

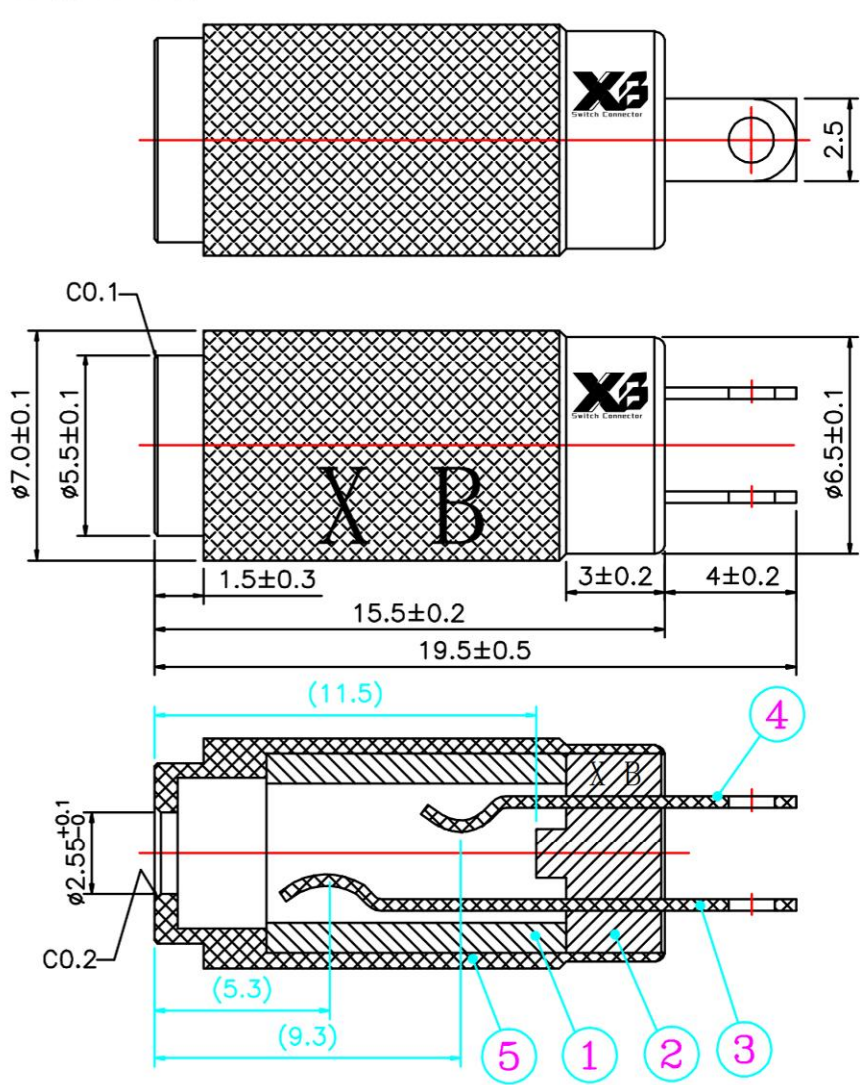

Technology Request:

1. Outlook:
No burr, no hurt.
2. Electronic performance:
a: Insulation resistance:
Above DC500V/100M Ω ;
b: Endure voltage:
AC500V at 1 minute;
c: Contact resistance:
Under 30m Ω ;
3. Insertion force & withdrawal force:
0.3-3kgf.
4. Salt spray test: 24H.
5. Meet RoHS.
6. Remark * is important specification.

SPECIFICATION


1. Rating : DC 30V 0.5A ; 1.0A ;
2. Contact resistance : $\leq 30m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles .

5	5.5*7*15.5*2.6 网纹管Au	C3604	Ni 40~120 μ Au1 μ
4	J253短片加长	C5191	Ni 40~120 μ Au0.8 μ
3	J253长片加长	C5191	Ni 40~120 μ
2	PLASTIC	PBT	BLACK
1	PLASTIC	PBT	BLACK
NO.	PART	MATERIAL	PLATING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB Audio jack
MODEL : XB-PJ-J25355G网纹2.5耳机插座立体声2脚 2.5x7.0x19.5



UNIT : MM	DWN.	ZENQ. CHEN	DATE	TOLERANCE	ANGLE TOL	2	TERMINAL	PBS STRIP	5	Ag PLATED
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE	$\leq 1.5mm \pm 0.1$ $> 1.5mm \pm 0.2$ $> 10.0mm \pm 0.3$	$\pm 2^\circ$	1	HOUSING	PBT	1	BLACK
VERSION	01	APPD.	FEI. LONG. HE	DATE		NO.	PART NAME	MATERIAL	QTY	FINISHING