

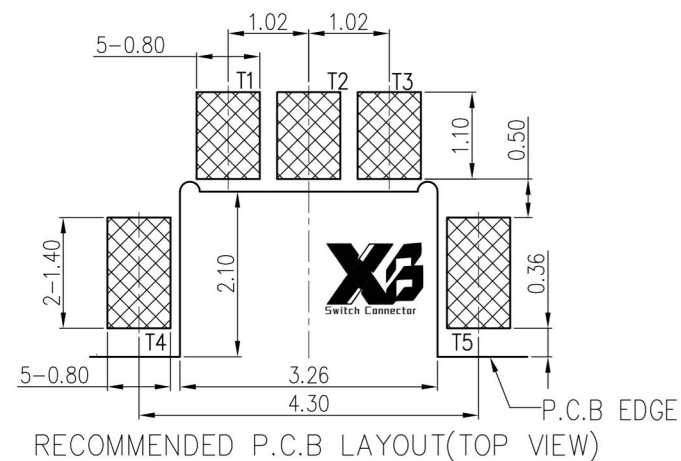
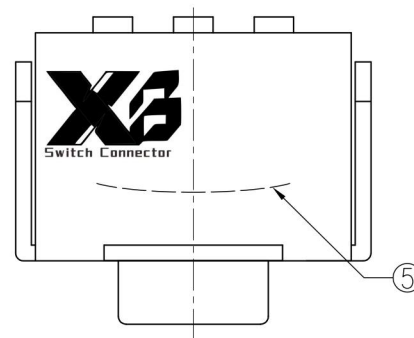
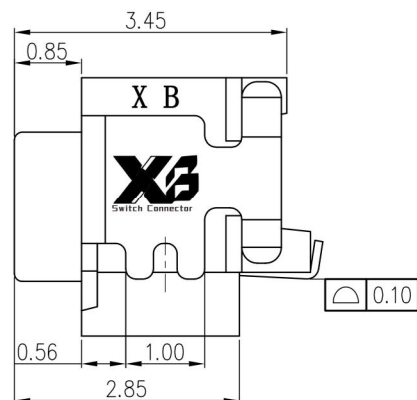
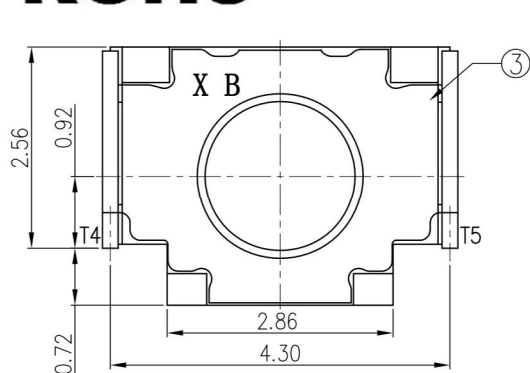


ROHS

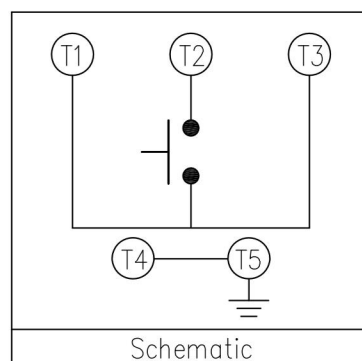

TOLERANCE: $\pm 0.05\text{mm}$

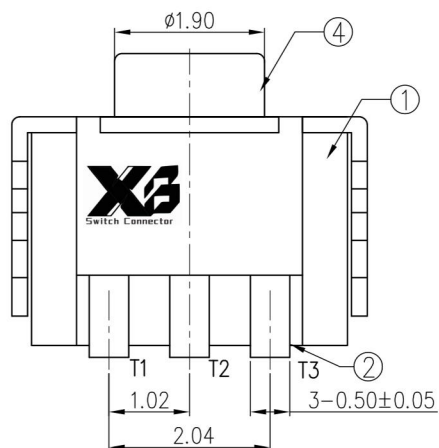

NOTES:

1.ELECTCAL CHARACTERISTICS:

1-1.CONTACT CURRENT RATING: 50mA.

1-2.CONTACT VOLTAGE RATING: 12V. DC.

1-3.CONTACT RESISTANCE: 100mΩ MAX.

1-4.DIELECTRIC WITHSTANDING VOLTAGE: 250V. AC.

1-5.INSULATION RESISTANCE: 100 MΩ MIN.

2.MECHANICAL CHARACTERISTICS:

2-1.DURABILITY:100,000 CYCLES.

2-2.STROKE: 0.45±0.20mm.

3.ENVIRENMENT CHARACTERISTICS:

3-1. OPERATING TEMPERATURE, $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

3-2.HUMIDITY: 45-85% RH.

⑤	接触片	1	不锈钢 t=0.05mm	Ag-PLATING
④	按柄	1	硅胶	黑色
③	盖板	1	磷铜 t=0.20mm	Ag-PLATING
②	端子	1	磷铜	Ag-PLATING
①	基座	1	PPA	黑色

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB TACT SWITCH

MODEL : XB-TS-1096M 沉板轻触开关 2.56x4.3x3.45



TOLERANCE	
$\leq 1.5\text{mm}$	± 0.1
$> 1.5\text{mm}$	± 0.2
$> 10.0\text{mm}$	± 0.3

ANGLE TOL
 $\pm 2^\circ$

8	REEL	PS	1	BLUE
7	CARRIER	PS	1	CLEAR
6	COVER TAPE	PS	1	CLEAR
5	CONTACT	PBS STRIP	1	Ag CLAD
4	COVER	IRON STRIP	1	Ni PLATED
3	CASE	NYLON	1	BLACK
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	NYLON	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING