

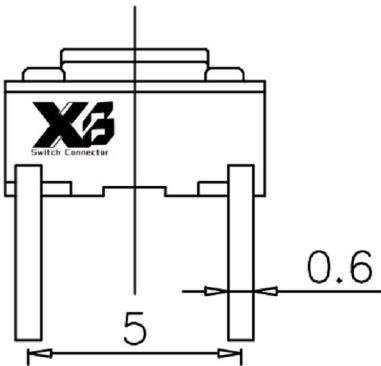





ROHS

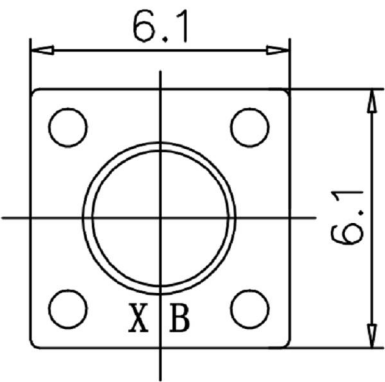

安装孔位图



PCB LAYOUT MOUNTING PATTERN

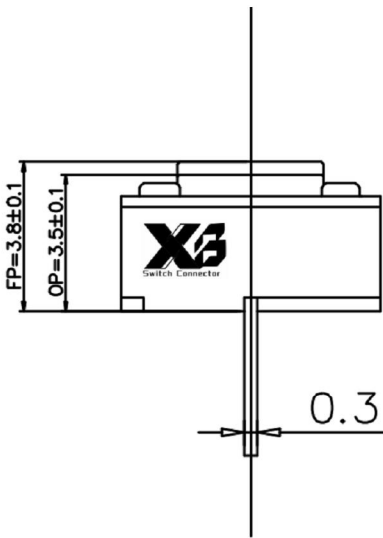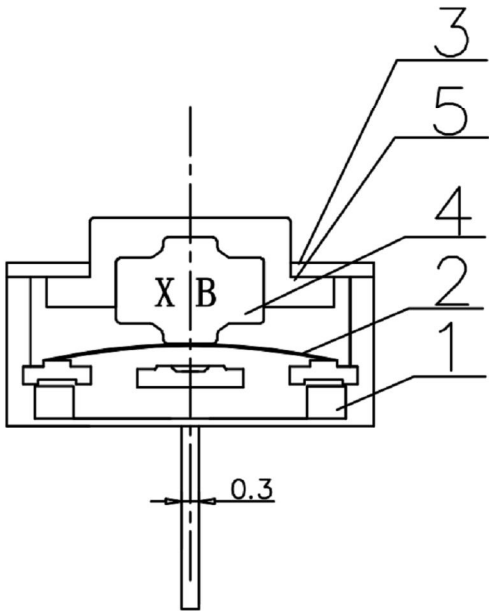


CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.3 ± 0.1mm
Operating Force	60gf 70gf 80gf 90gf
Operating Life(cycles)	100,000

5	HS6.0428.035-5	按钮	1	POM(红)
4	HS6.0428.018-4	按垫	1	橡胶
3	HS6.0428.030-3	盖板	1	PVC(白)
2	HS6.0428.005-2	簧片	1	单面银磷青铜0.05mm
1	HS6.0428.025-1	底座组	1	PPA(黑) 黄铜带H65Y0.3mm
序号	编号	材料	数量	材料

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD												
		TITLE : XB TACT SWITCH												
		MODEL : XB-TS-2DV038 无声开关6.1X6.1X3.8MM												
UNIT : MM		DWN.		DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	8	REEL	PS	1	BLUE		
SCALE : 5 : 1		CHK'D		DATE				7	CARRIER	PS	1	CLEAR		
VERSION		01	APPD.	DATE				6	COVER TAPE	PS	1	CLEAR		
								5	CONTACT	PBS STRIP	1	Ag CLAD		
								4	COVER	IRON STRIP	1	Ni PLATED		
								3	CASE	NYLON	1	BLACK		
								2	TERMINAL	BRASS STRIP	2	Ag PLATED		
								1	KNOB	NYLON	1	BLACK		
								NO.	PART NAME	MATERIAL	QTY.	FINISHING		