

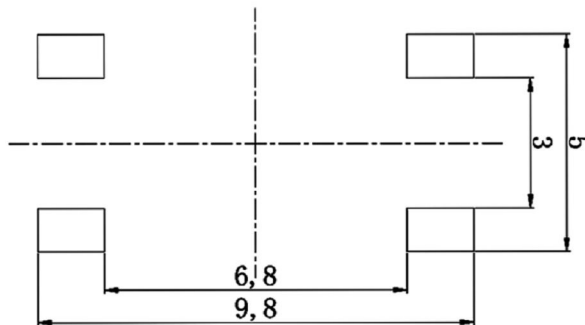
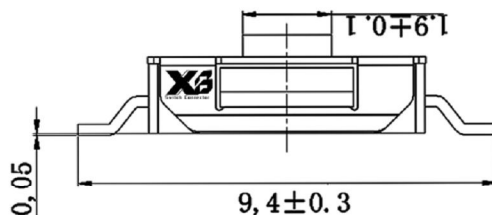
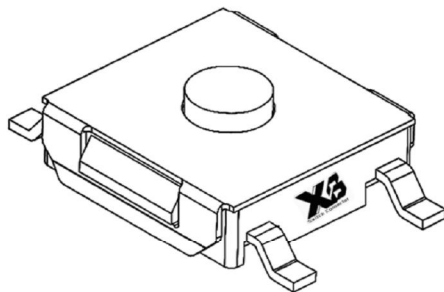
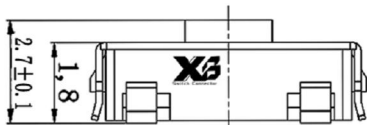
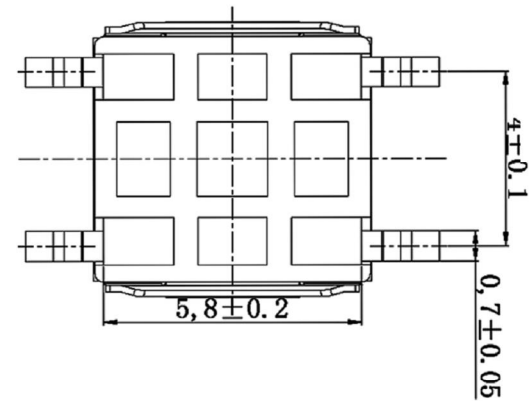



ROHS

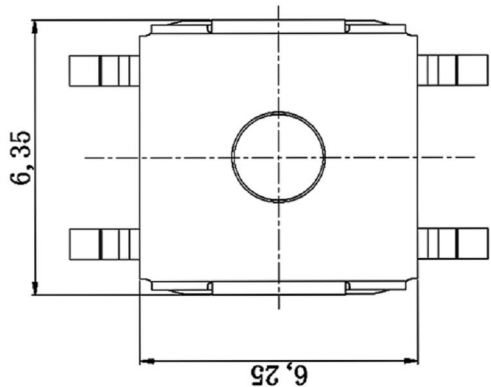

PCB LAYOUT MOUNTING PATTERN



CIRCUIT DIAGRAM

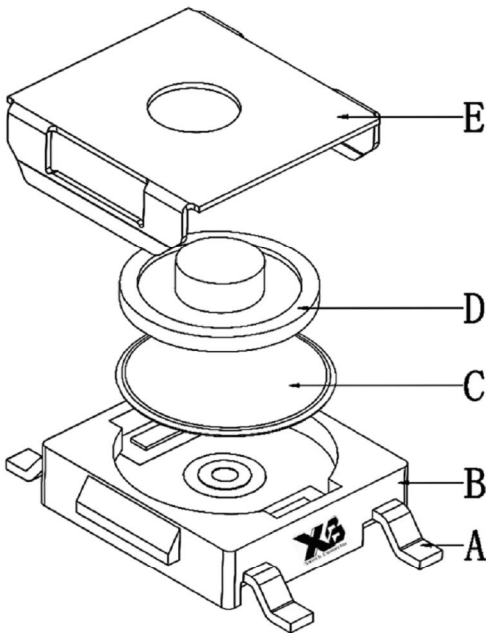

SPECIFICATIONS

Rating	50mA 12V DC
Contact Resistance	100 兆欧
Travel	0.25±0.1mm
Operating Force	100±30gF
Operating Life(cycles)	100万次

序号	名称	材料	数量	备注
A	卡件	黄铜 0.25	1	镀银
B	基座	PPA	1	清洗
C	簧片	不锈钢覆银	1	
D	按钮	硅胶	1	蓝色
E	盖板	不锈钢 0.15	1	清洗

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD				 		8	REEL	PS	1	BLUE	
		TITLE : XB TACT SWITCH MODEL : XB-TS-4DV027 防水硅胶轻触开关6.25x6.35x2.7mm						7	CARRIER	PS	1	CLEAR	
								6	COVER TAPE	PS	1	CLEAR	
UNIT : MM		DWN.		DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	5	CONTACT	PBS STRIP	1	Ag CLAD	
SCALE : 5 : 1		CHK'D		DATE				4	COVER	IRON STRIP	1	Ni PLATED	
VERSION		01	APPD.	DATE				3	CASE	NYLON	1	BLACK	
								2	TERMINAL	BRASS STRIP	2	Ag PLATED	
								1	KNOB	NYLON	1	BLACK	
							NO.	PART NAME	MATERIAL	QTY.	FINISHING		