


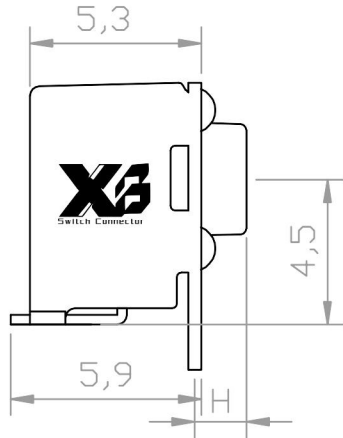
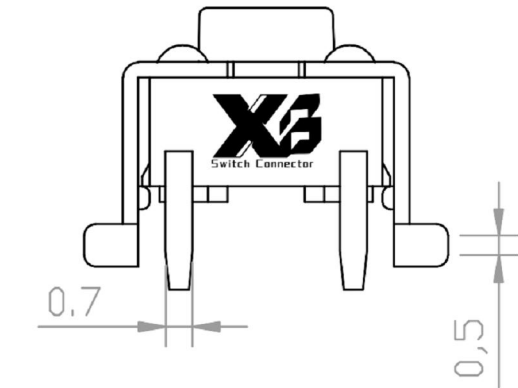


ROHS

>15.0	ø3.0	
15.0	ø3.0	13.85
14.0	ø3.0	12.85
13.0	ø3.0	11.85
12.5	ø3.0	11.35
12.0	ø3.0	10.85
11.5	ø3.0	10.35
11.0	ø3.0	9.85
10.5	ø3.0	9.35
10.0	ø3.2	8.85
9.5	ø3.2	8.35
9.0	ø3.2	7.85
8.5	ø3.3	7.35
8.0	ø3.3	6.85
7.5	ø3.3	6.35
7.0	ø3.3	5.85
6.5	ø3.3	5.35
6.0	ø3.3	4.85
5.5	ø3.3	4.35
5.0	ø3.5	3.85
4.3	ø3.5	3.15
帽头H 单位 (mm)	直径A 单位 (mm)	脚中心L 单位 (mm)

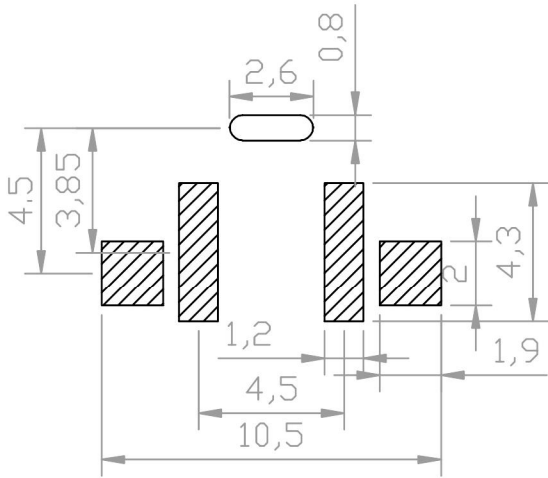

电路图

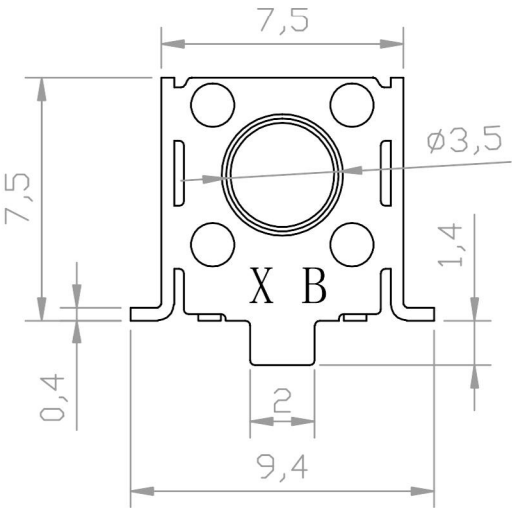

- 技术参数:
- 1. 做用温度: -25~+85℃;
 - 2. 额定负荷: DC 12V 50mA;
 - 3. 接触电阻: ≤50mΩ;
 - 4. 绝缘电阻: ≥100MΩ;
 - 5. 耐 压: AC250V (50Hz)/min;
 - 6. 动 作 力: 250g±50g;
 - 7. 使用寿命: 100000次;
 - 8. 未注尺寸公差参照下面表格。

5	接触脚	黄铜	镀银	1
4	基座	PPA (黑色)	——	1
3	支架	冷轧钢带	铜锡	1
2	簧片	不锈钢	镀银	1
1	按钮	PPA (黑色)	——	1
序号	零件名称	材料规格	表面处理	数量

					东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD									
TITLE : XB TACT SWITCH														
MODEL : XB-TS-7575-45H 轻触开关6X6贴片支架4.5间距下贴														
UNIT : MM					TOLERANCE					ANGLE TOL				
SCALE : 5 : 1					<=1.5mm ± 0.1					± 2°				
VERSION 01					> 1.5mm ± 0.2									
APPD. FEI. LONG. HE					>=10.0mm ± 0.3									
DWN. ZENQ. CHEN					DATE					8 REEL PS 1 BLUE				
CHK'D PENG. GAO					DATE					7 CARRIER PS 1 CLEAR				
										6 COVER TAPE PS 1 CLEAR				
										5 CONTACT PBS STRIP 1 Ag CLAD				
										4 COVER IRON STRIP 1 Ni PLATED				
										3 CASE NYLON 1 BLACK				
										2 TERMINAL BRASS STRIP 2 Ag PLATED				
										1 KNOB NYLON 1 BLACK				
										NO. PART NAME MATERIAL QTY. FINISHING				