





ROHS

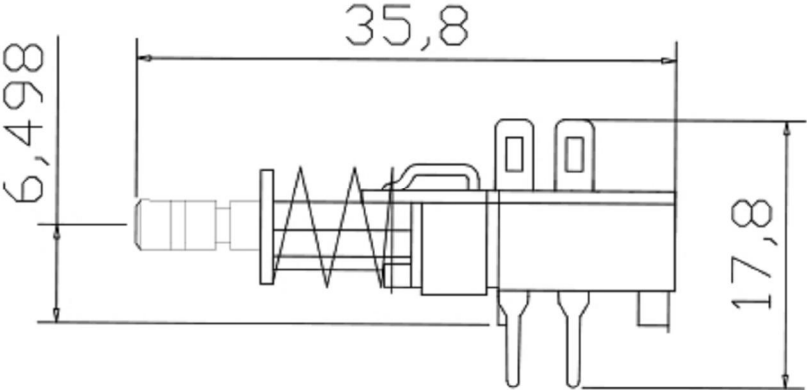

PCB LAYOUT



SCHEMATIC

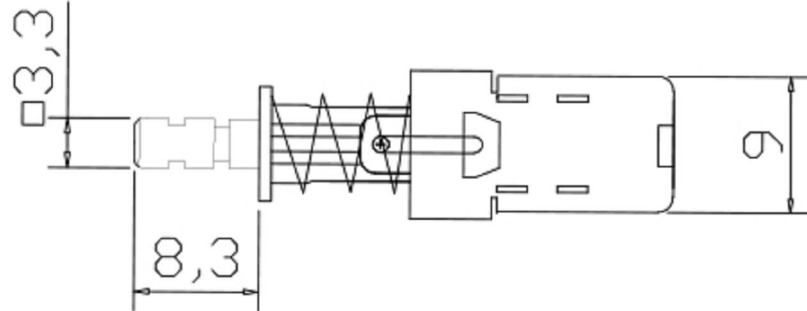

型号	间距	针座高度			
直键开关二档互锁	20(间距)	T14平针	T18中针	T21产品针	T25长中针
直键开关三档互锁					
直键开关四档互锁					
直键开关五档互锁					
直键开关六档互锁					
直键开关七档互锁					
直键开关八档互锁					

以上规格可以按客户需求订做
自锁、无锁、互锁、带按键帽、铁架间距

ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWICH
Model: XB-PBS-21H18
Rating: 0.3A 0.5A 12V 30V DC
Function: 2P2T
Timing:Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles

	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD											
								8	CONTACT CLIP	PBS STRIP	2	Ag CLAD
								7	RING	IRON STRIP	1	Zn PLATED
TITLE : XB PUHS BUTTON SWITCH							6	SPRING	SUS	1	NATURE	
MODEL : XB-PBS-21H18 侧按直键开关四脚2路2组							5	SLEEVE	POM	1	GRAY	
							4	CASE	NYLON	1	GRAY	
UNIT : MM		DWN.	ZENQ. CHEN	DATE	2024-05-08	TOLERANCE <=1.5mm ± 0.1 >1.5mm ± 0.2 >=10mm ± 0.3	ANGLE ± 2°	3	COVER	PBT	1	GRAY
SCALE : 3 : 1		CHK'D	PANG. DONG	DATE	2024-05-08			2	TERMINAL	BRASS STRIP	6	Ag PLATED
VERSION		01	APPD.	FEI. LONG. HE	DATE			2024-05-08	1	KNOB	POM	1
								NO.	PART NAME	MATERIAL	QTY.	FINISHING